
FED. SUP CLASS
2320

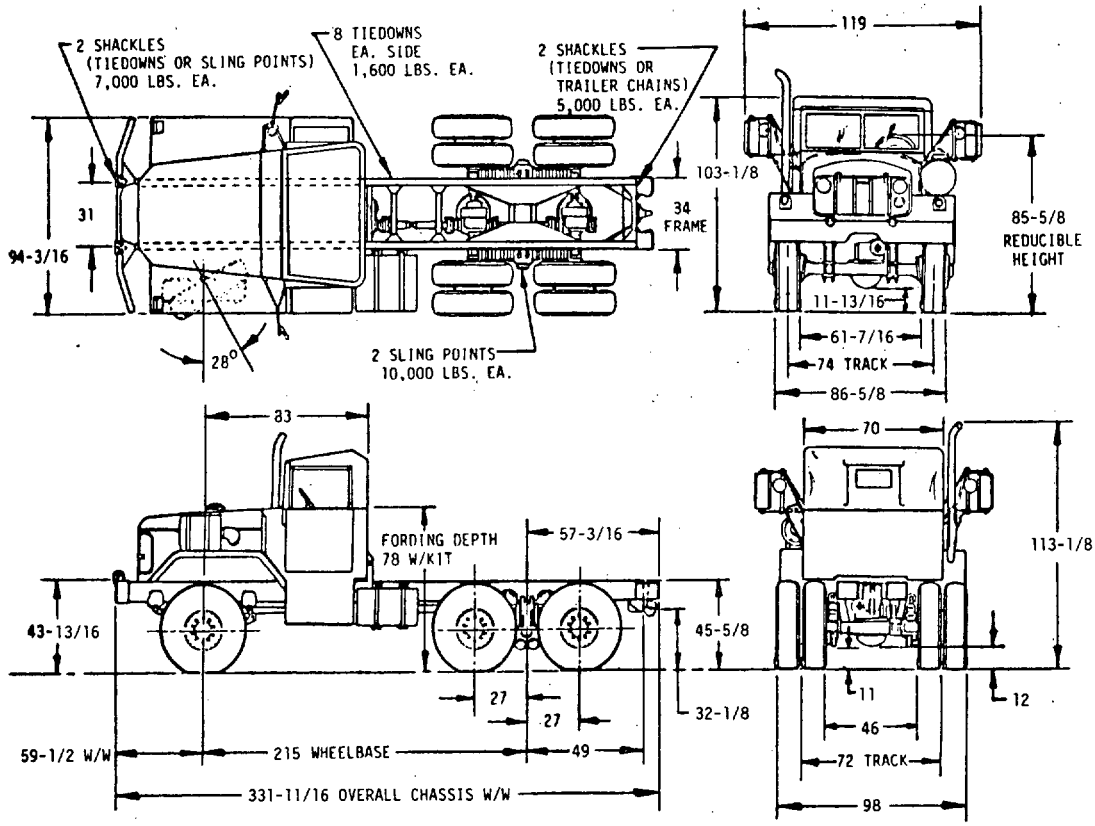

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52177-1	8736868	WITH WINCH

APPROVED 3 MAY 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK: 5 TON, 6x6, M811A1.	MILITARY STANDARD MS52177(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND CREW — W/W
- FRONT 10,180 LBS
- REAR 10,260 LBS
- TOTAL 20,440 LBS

PAYLOAD: (MAX INCLUDING BODY) 26,100 LBS

TOWED LOAD ALLOWANCE: 15,000 LBS

SHIPPING DIMENSIONS:
- CUBIC FEET 1605
- SQUARE FEET 225

ANGLE OF APPROACH: (LOADED) 32°

ANGLE OF DEPARTURE: (LOADED) 45°

ANGLE OF BREAKOVER: (LOADED) 28°

MINIMUM TURNING RADIUS: (WALL TO WALL) 584-7/16

FORDING DEPTH: WITH KIT 78 LESS KIT 30

ENGINE: 11664325-2
6 CYL IN-LINE
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 855 CU IN
BORE AND STROKE 5.5 X 6
COMPRESSION RATIO 15.8:1 FUEL DIESEL
OCTANE/CETANE #40
HORSEPOWER; GROSS 240 @ 2100 RPM
NET 210 @ 2100 RPM
TORQUE GROSS; 658 LB FT @ 1500 RPM
NET 600 LB FT @ 1500 RPM
CRANK CASE CAPACITY; W/O FILTER 24 QTS
W/FILTER 28 QTS
GOVENROR; TYPE AUTOMATIC
COOLING SYSTEM CAPACITY; 37-1/2 QTS
PUMP TYPE DRIVE 2 V BELTS
GOVERNED SPEED; 2100 RPM AT FULL LOAD

FUEL SYSTEM: FUEL TANK CAPACITY 78 GALS
FUEL PUMP, IN TANK; FUEL INJECTION

CLUTCH: TYPE SINGLE DRY DISC DIA 15
EFFECTIVE AREA 70.2 SQ IN
- PRESSURE PLATE 8735507
- DRIVEN MEMBER 11664387

TRANSMISSION: MANUAL 8333627-1
NO OF SPEEDS - 5 FWD, 1 REV; RATIOS;
1ST - 6.07; 2ND -3.40; 3RD -1.79;
4TH -1.00; 5TH - .78; REV. - 6.09
PTO OPENINDS 2 SAE 6 BOLT, EACH SIDE
OF TRANSMISSION. LUBRICANT CAPACITY;
W/PTO 11 QTS; W/P PTO 9 QTS,

TRANSFER CASE:W/PTO 7748580
NO OF SPEEDS 2 FRONT; HIGH - 1.07:1
LOW - 2.16:1, REAR; HIGH - 1.00:1,
LOW - 2.02:1 CONTROL OF FRONT AXLE
DRIVE, AUTOMATIC OVERRUNNING, LUB-
RICANT CAPACITY 7 QTS ONE PTO OPENING.

PINTLE: MS51117-1
MAX. VERTICAL LOAD (STATIC) 1,500 LBS

BRAKES: PARKING TYPE INTERNAL/EXTERNAL
DRUM SIZE 14 DIA x 3 WIDE
EFFECTIVE AREA 68 SQ IN

ON-VEHICLE EQUIPMENT: (OVE)
- BASIC ISSUE ITEMS 12300877
- ADDITIONAL AUTHORIZED LIST ITEMS 12300998

AXLES: FRONT; 11664273
REAR; 8758346
QTY 2, TYPE SINGLE SPEED, DOUBLE REDUC-
TION RATIO 6.443:1, LUBRICANT CAPACITY
12 QTS EACH

FRAME: 11664505
TYPE RAIL CHANNEL SIDE RAIL DIMENSIONS
9 X 3 X 5/16 SECTION MODULUS 10.71 CU IN
NO. OF CROSSMEMBERS 6

FRONT SPRINGS: 7411110
3 WIDE X 50 LONG; NO OF LEAVES 12; RATE
2,271 LB/IN; TYPE SEMI-ELLIPTICAL;
SHOCK ABSORBERS DIRECT ACTING, QTY 2.

REAR SPRINGS: 8237139
SIZE 4 WIDE X 59-1/4 LONG NO. OF LEAVES
6, RATE 6,434 LB/IN; TYPE BEAM OVER SEMI-
ELLIPTICAL LEAF, QTY 2.

TIRES W/FLAP AND TUBE: MIL-T-12459
SIZE 12.00 X 20 TREAD DESIGN NDCC
FRONT & 1 SPARE LOAD RATING H ZZ-T-381
REAR, LOAD RATING G ZZ-I-550

WHEELS: TYPE STEEL DISC 12300571
FRONT & 1 SPARE 20 DIA
8-1/2 WIDE; 7-1/8 OFFSET;
- RING 12300567
- REAR DUAL 7388820

7-1/2 WIDE; 6-3/4 OFFSET;
- RING 7389061

BRAKES: SERVICE, TYPE AIR ASSISTED
HYDRAULIC, INTERNAL EXPANDING DRUM
SIZE 16-1/2 X 5-1/2, EFFECTIVE AREA
FRONT 339 SQ IN REAR 678 SQ IN

ELECTRICAL SYSTEM: WATERPROOFED, RADIO
SUPPRESSED PER MIL-STD-461.
- POTENTIAL 24 V STARTING MTR MS53011-1
- ALTERNATOR 10929868
- RATING 60 AMP; DRIVE 2 V BELTS
- BATTERIES; QTY 4, TYPE 12V 6TN MS35000-3
- TRAILER COUPLING SOCKET 7363002
- TURN SIGNAL; SOLID STATE FLASHER 11613631
- CONTROL 11613632
- LIGHTING; HEADLAMPS 8741462
- B.O. DRIVING LAMP 8747988
- COMPOSITE LAMPS; FRONT 11614156
- REAR 11614157

PERFORMANCE: APPROX 4.4 MILES PER GALLON
350 MILES CRUISING RANGE GRADEABILITY;
WITH GVW OF 46,940 LBS 4TH GEAR 2.0%
1ST 45° MAXIMUM SPEED 52 MPH AT ENGINE
GOVERNED SPEED 2100 RPM
W/DIESEL FUEL, TYPE VV-F-800

CAB: TYPE STD CANVAS; ARCTIC HARDTOP
KIT; CAPACITY 2.

WINCH: 7411122
CAPACITY 9,500 LBS
WIRE ROPE CABLE 0.6 IN DIA CABLE LENGTH
280 FT

STEERING: TYPE HYD W/POWER ASSIST;
RATIO 23.4:1 11664535

TIEDOWNS: 16 W/W, 8 EACH SIDE 10883223
- 2 FRONT LIFTING SHACKLES, 12301040
- 2 REAR SHACKLES 7409523

ACCESSORY/SUPPLEMENTAL KITS: 12300925

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52177-1	8736868	WITH WINCH

APPROVED 3 MAY 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK: 5 TON, 6x6, M811A1,	MILITARY STANDARD MS52177(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.