FED. SUP CLASS
2350

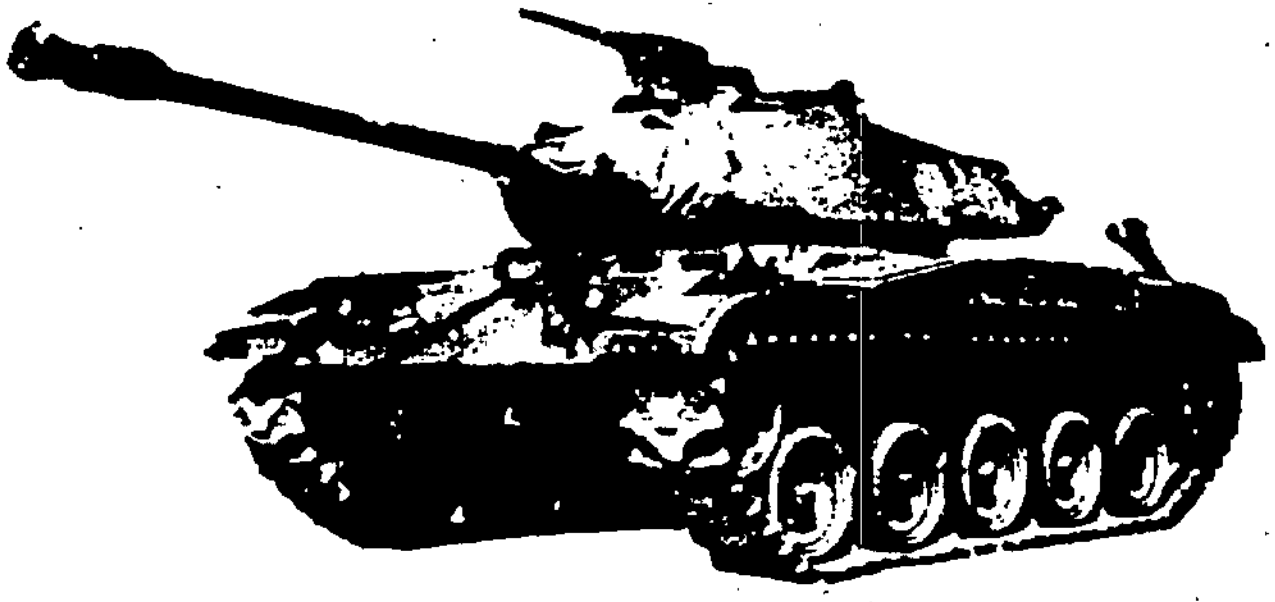

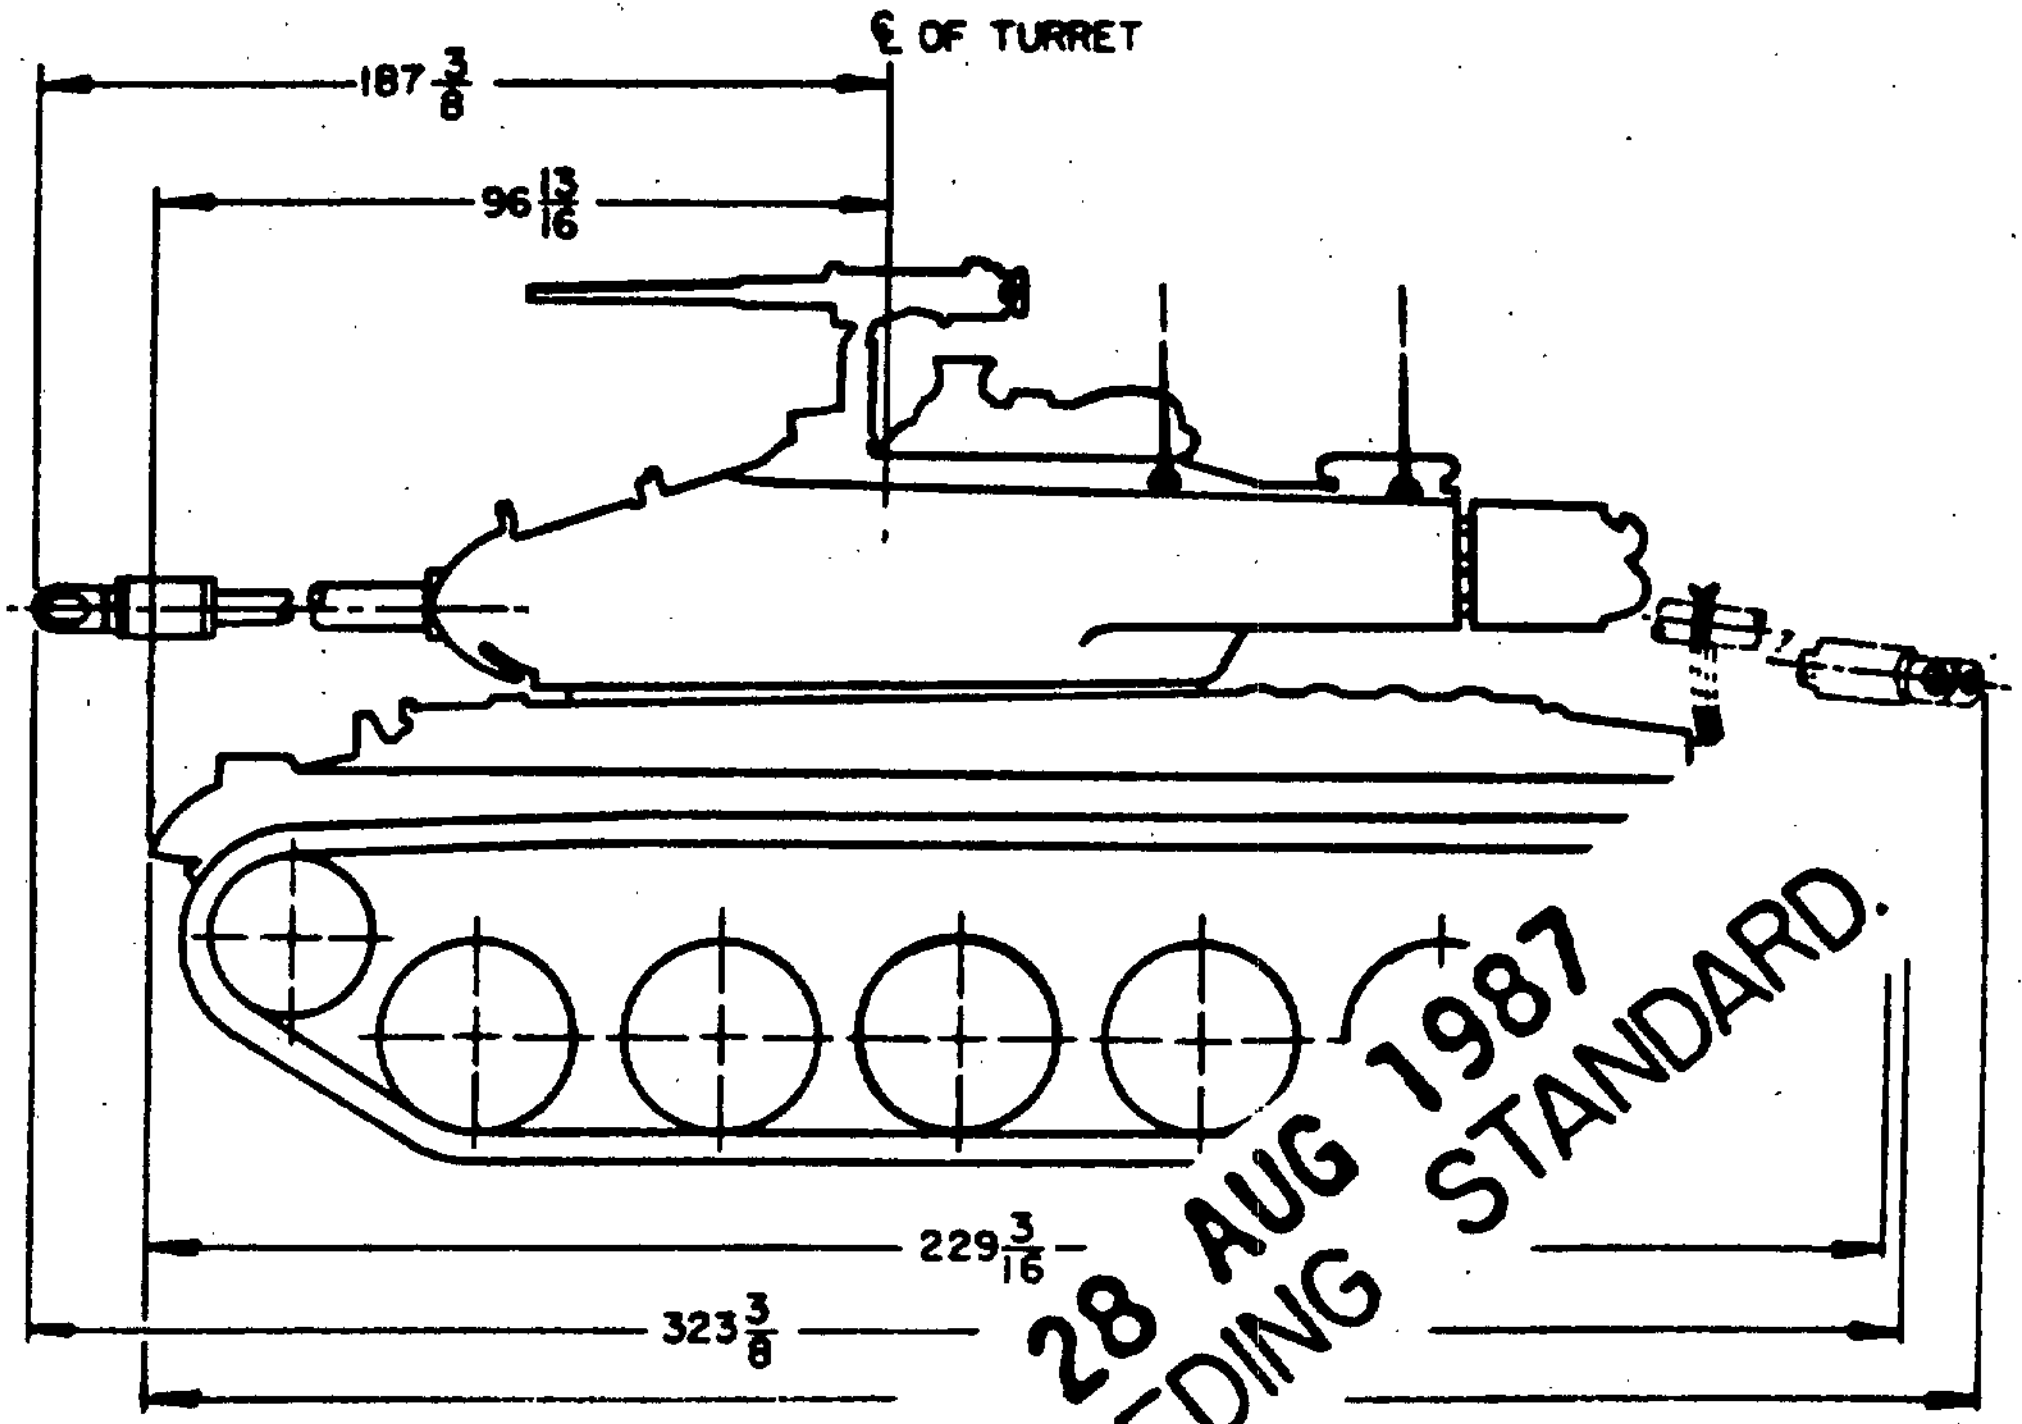

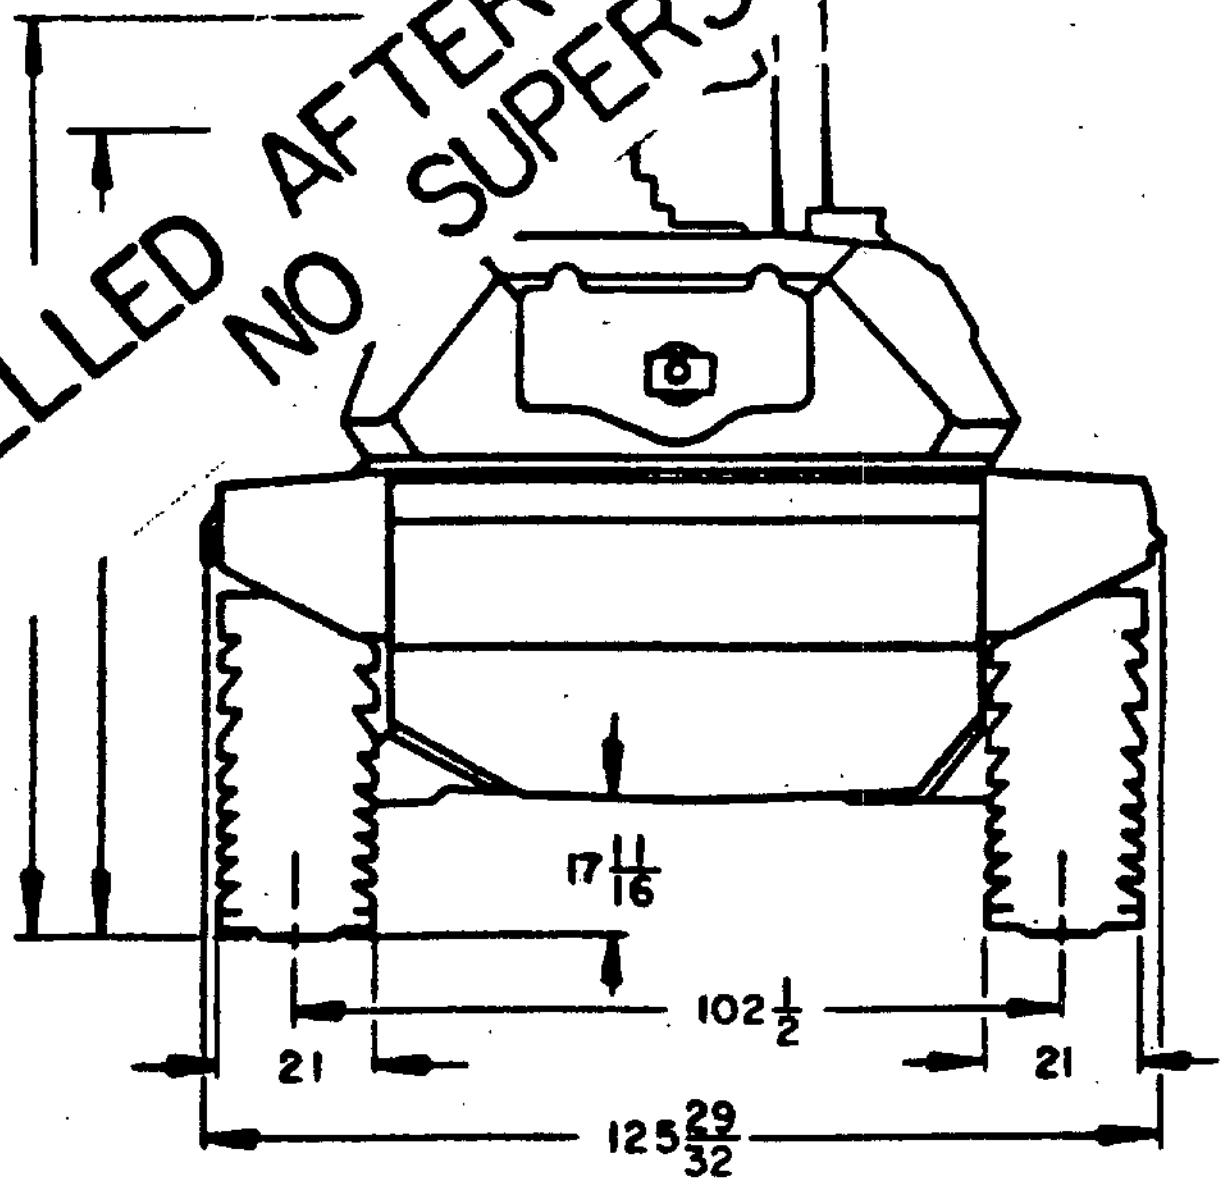

Ⓐ CANCELLED AFTER 28 AUG 1987
NO SUPERSEDING STANDARD.

NOTE: ALL DIMENSIONS SHOWN ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

This standard has been approved by the MOBILITY COMMAND Department of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 25 JULY 1963 REVISED Ⓐ 28 AUG 1987

MS PART NO.	DRAWING NO.		
MS 53057 -1	F 8736132		
P.A. NO. Other Cust	TITLE TANK, COMBAT, FULL TRACKED - 76MM GUN, M41A3	MILITARY STANDARD MS53057 (MO)	
PROCUREMENT SPECIFICATION MIL-T-10401	SUPERSEDES	SHEET 1	OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

Ⓐ CANCELLED AFTER 28 AUG 1987
NO SUPERSEDING STANDARD.

GENERAL

WEIGHT (COMBAT LOADED) APPROX. 51,000 LBS.
CREW 4
WEIGHT (LESS CREW, STOWAGE AND FUEL) 44,691 LBS.
CENTER OF GRAVITY 45.275 IN. ABOVE GROUND 87.517 IN. FROM CENTER LINE OF SPROCKETS
UNIT GROUND PRESSURE 9.7 LBS/SQ. INCH
TURRET RING 73 IN. DIAMETER (INSIDE)

VISION AND SIGHTING EQUIPMENT

PERISCOPE (VISION) DRIVER'S	TYPE M17	QTY. 4
PERISCOPE (VISION) LOADER'S	TYPE M13	QTY. 1
SIGHT, PERISCOPE COMMANDER'S	TYPE M20A1	QTY. 1
SIGHT, PERISCOPE GUNNER'S	TYPE M20A1	QTY. 1
SIGHT, TELESCOPE	TYPE M97	QTY. 1
QUADRANT, ELEVATION	TYPE M9	QTY. 1
QUADRANT, GUNNER'S	TYPE M1	QTY. 1

ARMAMENT

PRIMARY GUN, 76 MM, M32 (T91E3), IN MOUNT M76A1 RECOIL MECH. TYPE CONCENTRIC
TRAVERSE, RIGHT 360° LEFT 360° RATE 6 RPM
POWER, TYPE HYD. ELECTRIC MANUAL TYPE GEAR TRAIN
ELEVATION +19° 45' DEPRESSION -9° 45' RATE 240° PER MIN.
STABILIZER SYSTEM, NONE LOADING, MANUAL

SECONDARY ARAMENT

1. 1 MG. CAL. 50 HB, M2E1 COAXIAL W/76 MM GUN
   TRAVERSE, 360° ELEVATION +19° -9° 45'
   OR
   1 MG. CAL. 30 M1919A4E1 COAXIAL W/76 [illegible]
   TRAVERSE, 360° ELEVATION +19° -9[illegible]
2. 1 MG. CAL. 50 HB, M2 FLEX. TURRET MT., TRAVERSE, 360° ELEVATI[illegible]
   OTHER
   1 SMG. CAL. .45, M3A1, CA[illegible]

AMMUNITION

65 RDS. 76 MM 600 RD[illegible]
2175 RDS. CAL. 50 COA[illegible] .45 SMG
5150 RDS. CAL. 30 C[illegible] .30 CARBINE
OTHER: 8 GRENADE[illegible]

RUNNING GEAR

SUSPENSION, [illegible]
NO. OF WHEELS [illegible] SIDE WHEEL SIZE 25½ IN.
TRACK, TYPE T9[illegible] W/DETACHABLE RUBBER PADS CENTER GUIDE, [illegible]LE PIN
NO. SHOES/TRACK 7[illegible] PITCH 6 IN. WIDTH 21 IN.
TIRES: NO. 20 TYPE SOLID RUBBER SIZE 25 1/2 x 4 1/2 IN.

ELECTRICAL SYSTEM

NOMINAL VOLTAGE 24 VOLTS
GENERATOR, MAIN, AMPERES 150 PART NO. 8724633
GENERATOR, AUX., AMPERES 300 PART NO. 7402334
BATTERY, MS 35000-4 QTY. 4, TYPE 6 TN; 12 V, 100 AMP. HRS.
IGNITION SYSTEM (BATTERY) MAGNETO, SCINTILLA QTY. 2
MAGNETO, MS 51333 COIL, MS 51355-1

POWER PACKAGE

ENGINE

TYPE, 6 CYLINDER, HORIZONTAL OPPOSED, AIR-COOLED, FUEL INJECTION, MS 51314-1
DISPLACEMENT 895 CU. IN. BORE 5.75 IN. STROKE 5.75 IN.
GOVERNED SPEED 2800 RPM COMPRESSION RATIO 5.5:1
FUEL, GASOLINE RATING, 80 OCTANE CAPACITY 140 GAL. (APPROX.)

MAX. GROSS HORSEPOWER	525	@ 2800 RPM
MAX. NET HORSEPOWER	418	@ 2800 RPM
MAX. GROSS TORQUE	970	@ 2300 RPM
MAX. NET TORQUE	865	@ 2300 RPM

MAIN COOLING SYSTEM, AIR ENG. OIL CAP. 44 QTS.
OIL COOLING SYSTEM, ENGINE MOUNTED COOLER AIR COOLED WITH ENGINE DRIVEN

POWER TRAIN

TYPE, CROSS DRIVE T[illegible] [illegible]O. 7527947
HYDRAULIC CONVERT[illegible] [illegible]LTIPHASE STALL MULTIPL[illegible]
OVERALL USEAB[illegible] HIGH 3.9 DIRECT 1[illegible]
STEERING [illegible]NING RADIUS, PIVOT TO I[illegible]
STEER[illegible] [illegible]AR-SERVO
BRA[illegible] OPERATION, MECHANICAL
[illegible]EM, ENGINE MOUNTED COOLER AIR [illegible] ENGINE DRIVEN FAN

[illegible]CTION

[illegible]PUR GEAR RATIO 4.25 TO 1 FT./REV. 6
[illegible]KET PITCH DIA. 23.422 NO. OF TEETH 12

[illegible]UNICATIONS

RADIO SET AN/GRC-3 OR 7 OR 8 LOCATION TURRET BUSTLE
RADIO SET AN/GRC-3 OR 7 AND AN/GRC-3 LOCATION (AN/ARC IN TURRET STOWAGE BOX)
INTERPHONE MODEL, PART OF RADIO SET OR AN/UIC NO. OF OUTLETS 4
EXTERNAL INTERPHONE EXTENSION KIT-MODEL AN/VIA-1

FIRE EXTINGUISHER

PART NO. 7714476	FIXED TWO-10 LB. CO_2
PART NO. 7714780	PORTABLE ONE 5 LB. CO_2

PERFORMANCE

GROSS HORSEPOWER TO WEIGHT RATIO 19.3 HP/TON
MAX. TRACTIVE EFFORT 44,000 LBS. TE/W 85.9%
MAX. SPEED 45 MPH MAX. GRADE 60%
MAX. TRENCH CROSSING WIDTH 72 IN. MAX. VERTICAL WALL 28 IN.
CRUISING RANGE 110 MILES W/KIT 280 MILES
MAX. FORDING DEPTH 48 IN. W/KIT TOP OF TURRET

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING NO. 8736132 COPY OF WHICH MAY BE OBTAINED FROM ARMY TANK AUTOMOTIVE CENTER, DETROIT ARSENAL, CENTER LINE, MICHIGAN, ATTN: STANDARDIZATION BRANCH.

APPROVED 25 JULY 1963 REVISED Ⓐ 28 AUG 1987

This standard has been approved by the MOBILITY COMMAND Department of the ARMY and is mandatory for use by [illegible] activity. All other [illegible] activities are required to employ this standard [illegible] suitable.

P A MO. Other Cust	TITLE TANK, COMBAT, FULL TRACKED — 76 MM GUN, M41A3	MILITARY STANDARD MS 53057 (MO)
PROCUREMENT SPECIFICATION MIL-T-10401	SUPERSEDES	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.