INCH-POUND

A-A-55122
19 January 1993

COMMERCIAL ITEM DESCRIPTION

HOOD, RAIN, WOMAN'S

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-H-83269.

Abstract. This Commercial Item Description covers the requirements for one type of rain hood with visor in one universal size. The hood is intended to be worn by female personnel of the Department of the Air Force.

Salient Characteristics. The rain hood shall be constructed of a laminated nylon cloth, have four pleats, two evenly spaced on each side of center back point, with the outside fold of the pleats facing the center back, and have a visor attached to the front of the rain hood. All edges of the hood and visor shall be bound and the ends of the binding shall be trimmed at the points of the hood (see Figure 1).

Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written Commercial Item Description and the figure, the written Commercial Item Description shall govern.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Material.

Laminated cloth. The finished cloth shall consist of the knitted nylon base cloth, laminated on the rib side with a transparent polyethylene film of not less than 0.0001 inch thick. The adhesion of the film to the knit cloth, in the direction of the wales or the courses, shall be not less than 60 grams when tested in accordance with AATCC Test Method 136, except that the specimens are not required to be laundered or dry-cleaned prior to testing. The breaking strength in the direction of the wales and in the direction of the courses of the laminated cloth shall be not less than 19 pounds in each direction when tested in accordance with ASTM-D 5034. The knit side of the laminated cloth shall be the outside of the rain hood as worn.

Base cloth. The base cloth shall be knit with 15-denier nylon on a 2-bar tricot machine using a jersey stitch. The knitted cloth shall have a minimum of 30 wales and 32 courses per inch when tested in accordance with ASTM-D 3887. The base cloth shall be white and shall weigh 0.6 to 0.7 ounces per square yard, when tested in accordance with ASTM-D 3887. The binding shall be straight cut 1 inch wide from the base cloth.

Thread. The thread for all seaming and stitching, shall be white cotton, Ticket No. 0 or 00, 3 ply with a minimum breaking strength of 2.1 pounds when tested in accordance with ASTM-D 204.

Finished measurement. The finished measurement of the rain hood shall be 14-3/16, $\pm$ 1/4 inches when measured with the rain hood folded in half lengthwise and measure from the center back point to the top visor-joining seam.

Patterns. The government shall furnish the single size pattern. The pattern generally provides for a seam allowance of 1/4 inch for all seams. A Commercial pattern may be used in lieu of the government furnished pattern provided it conforms to the cited design and finished measurement.

Workmanship. After completion, the finished hood shall be thoroughly clean, and all loose thread, lint, and foreign matter removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Lots of hoods shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Visual Examination. The inspection level for visual examination shall be II and the AQL expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10.0 for total (major and minor combined) defects. The hoods shall be examined for the defects listed below:

Classification of visual defects.

Examine	Defects	Classification Major	Classification Minor
Material	Any hole, cut, tear, drop stitch, thin area, mend, smash, multiple float, or burn.	X	
	Any slub more than twice the thickness of normal yarn.		X
	Rowey yarn or tiger stripes or loose knitting causing sleaziness.		X
	Film delamination from knit.	X	
Color	Not specified color or color not uniform.	X	
Cleanliness	Spot, stain, or streak of an obvious permanent nature.	X	
	Removable spot, stain, or streak clearly noticeable.		X
	Thread ends not trimmed or threads not removed		X
Components	Any component missing or not as specified.	X	
	Knit side of laminated cloth of any part not on outside of rain hood as worn.	X	
Seams and stitchings	Any seams twisted, puckered, or stretched, affecting appearance.		X
	Needle chew.	X	
	Tight tension (stitches break when normal strain is applied to lengthwise direction of seam or stitching).		X
	Loose tension resulting in a loosely secured seam.		X
	Any part of rain hood badly pleated at seam line except bottom pleats in back or caught or twisted in any unrelated row of stitching.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Classification of visual defects. - Continued

Examine	Defects	Classification Major	Classification Minor
	Skipped, broken, or missing stitches for distance more than 1/2 inch.	X	
	Thread breaks not secured by stitching back of break 1/2 inch.		X
Pleats	Pleats not folded toward center back on the outside.	X	
	Two pleats unequally spaced from center back by 1/4 inch or more		
Bindings	Raw edge exposed along inner edge of binding.	X	
	Binding not securely caught to edges, causing binding to pull away from edge, or binding not securely caught to seam attaching visor to hood.	X	
	Binding badly twisted.		X
	Ends of binding at points of rain hood not trimmed		X

Dimensional Examination. The finished hoods shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one hood; the inspection level shall be S-3 and the AQL shall be 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5.

Examination	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, method of application.
Material	Missing, damaged, not as required.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping improper taping, inadequate stapling.
Content	Number of items per container is more or less than required. NSN shown on one or more items not as specified on shipping container.
Palletization	Length, width, or height exceeds specified maximum requirements. Pallet type not as specified. Load not bonded as specified.

Packaging, Packing, Marking, and Palletization

Packaging, packing, marking and palletization shall be in accordance with ASTM-D 3951, Standard Practice for Commercial Packaging, as specified for shipments to the Department of Defense, including Section 7. Shipping cartons shall be style RSC-L, variety SW, with DW liners, class Domestic, grade 275.

Note: Each shipping container shall contain only one National Stock Number (NSN) and a total quantity of one hundred and eight rain hoods packaged as specified above.

Unitized loads, placing boxes on pallets, shall be used whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. Pallets shall have a length of 40 inches and a width of 48 inches. Pallet loads, including the pallet, shall not exceed 54 inches in height, 43 inches in length and 52 inches in width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

The containers shall be bonded onto wing type commercial 4-way entry pallets.

Note: All palletized loads shall contain only one NSN, to the maximum extent possible. When there is less than a pallet load per NSN, pallets may have containers not of the same NSN, but the pallet shall be clearly marked "mixed" and each applicable NSN shall be listed together with its total quantity.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 204-82 - Standard Method of Testing Sewing Thread
ASTM-D 3887 - Standard Specification for Knitted Fabrics
ASTM-D 3951 - Standard Practice for Commercial Packaging
ASTM-D 5034 - Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Grab Test)

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC Technical Manual

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists, P O. Box 12215, Research Triangle Park, NC 27709.)

Custodian:
Air Force - 11

Review Activity:
Air Force - 82, 45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8410-0808

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

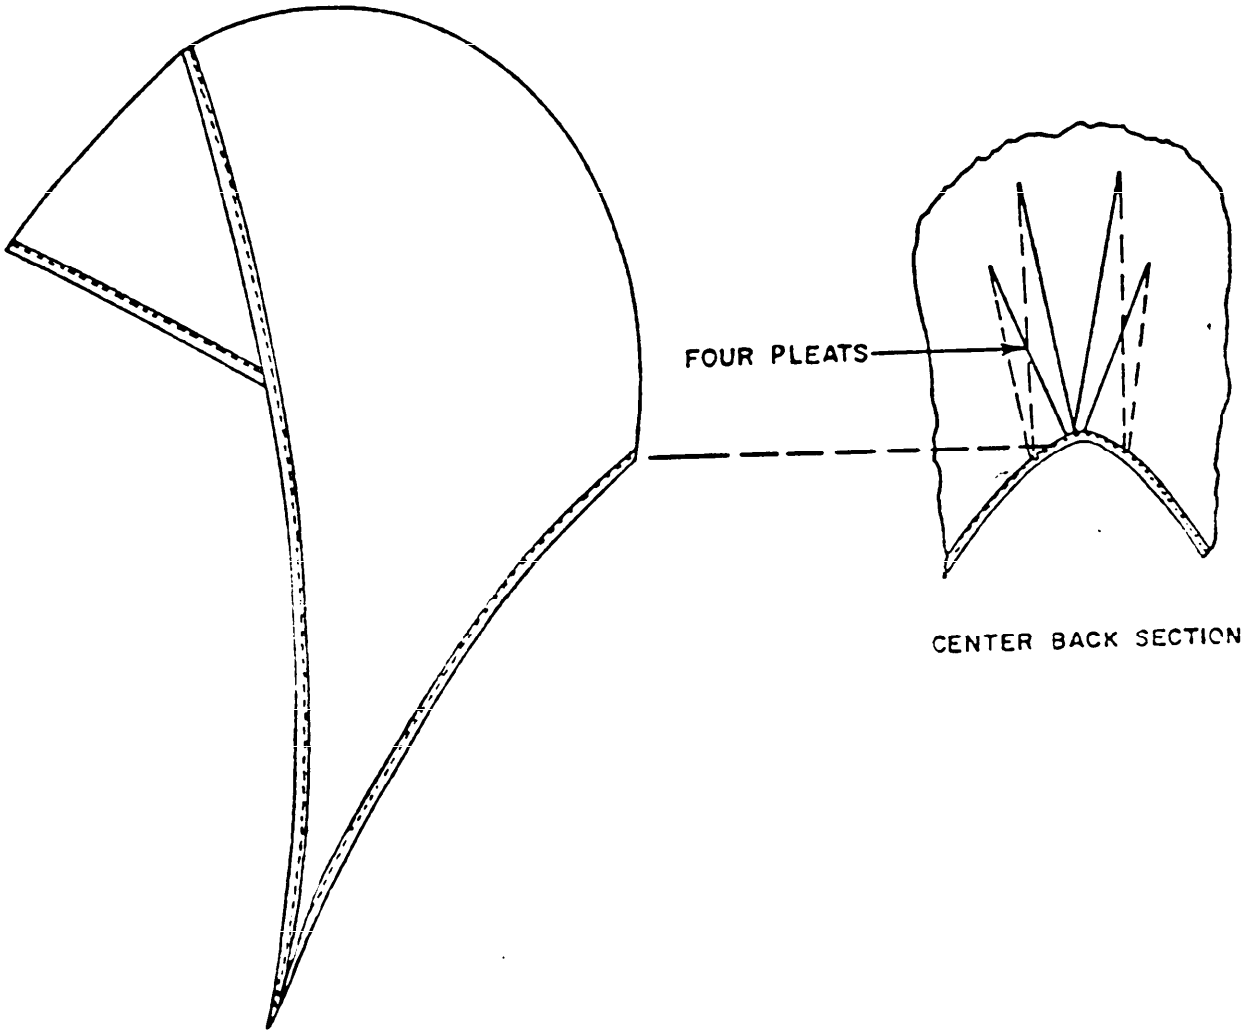


FIGURE 1. - RAIN HOOD, WOMAN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55122	930119

3. DOCUMENT TITLE
HOOD, RAIN, WOMAN'S

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.