MILITARY SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, NICKEL-CADMIUM, CONNECTOR, CURVED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of specification MIL-B-81757.

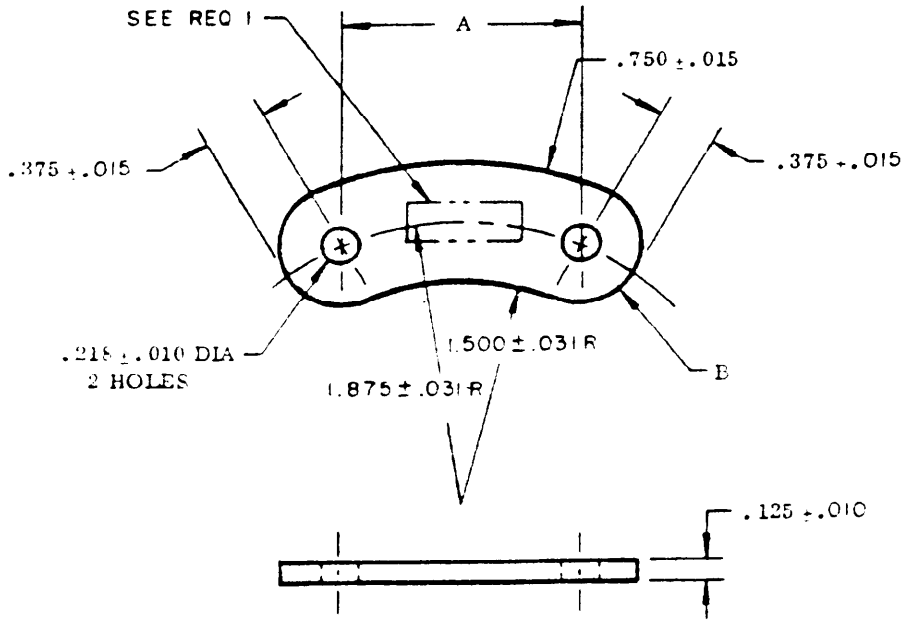


Figure 1. Connector, curved.

TABLE I.

Part No.	Dimensions		Used With Part No.
	A	B	
M81757/5-1	1.213±.015	.375±.031R	M81757/8-2
M81757/5-2	1.485±.015	.500±.031R	M81757/8-2

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part number shall be stamped using .125 inch characters, .005 inch deep minimum before plating.

2. Strap shall be constructed of copper conforming to Federal Specification QQ-C-502.

3. Strap shall be plated in accordance with Federal Specification QQ-N-290, Class 1, Grade E.

NOTES:

1. All dimensions are in inches, unless otherwise specified.

Custodians:
Navy - AS
Air Force - 11
Army - ER

Preparing Activity:
Navy - AS
(Project No. 6140-0554)

Review Activities:
Air Force - 99
Army - AV

User Activity:
Coast Guard - CG

NOTICE: Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-B-81757/5B BATTERY, STORAGE, AIRCRAFT, NICKEL-CADMIUM, CONNECTOR, CURVED

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12502 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Engineering Specifications and Standards
Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—705-023/6355 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.