MILITARY SPECIFICATION

TEST SET, GUIDED WEAPON AN/DSM-77B

This specification has been approved by the
Naval Air Systems Command, Department of the Navy.

1. SCOPE

1.1 Scope - The equipment covered by this specification is intended for preflight use, This specification covers the construction and performance requirements for the Test Set, Guided Weapon AN/DSM-77B, The test set provides a simulated optical target for determining the readiness of an installed Guided Weapon (WALLEYE) and its associated aircraft television display.

1.2 Classification - The equipment covered by this specification shall consist of the following and the equipments constructed in accordance with this specification are classified as production equipment.

Item	Type Designation
Test Set, Guided Weapon	TS-2765A/DSM-77A
Case, Test Set	CY-6566A/DSM-77A
Cable Assembly, Power, Electrical	W-1 of AN/DSM-77A
Cable Assembly, Electrical Extension	W-2 of AN/DSM-77A
Cable Assembly, Break-Away	W-3 of AN/DSM-77A
Cable Assembly, Sixty Cycle Electrical Power	W-4 of AN/DSM-77A

2. APPLICABLE DOCUMENTS

2.1 General - The following documents of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Military

MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-T-21200	Test Equipment for Use with Electronic and Fire Control Systems, General Specification for
MIL-R-22973	Reliability Index Determination for Avionic Equipment Models, General Specification for

STANDARDS

Military

MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-781	Reliability Tests Exponential Distribution

PUBLICATIONS

Military

WR-43	Preparation of Quality Assurance Provisions
ANA Bulletin No. 400	Electronic Equipment; Aircraft and Guided Missiles, Applicable Documents

DRAWINGS

Naval Air Systems Command

DL 64A16D1368	List of Drawings for Test Set, Guided Weapon AN/DSM-77B
SA-A-17931	Optical Alignment Test Fixture
SA-A-19608	Optical Alignment Test Fixture 0-5° Adjustable

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:12Z
Check the source to verify that this is the current version before use.

2.1.1 Availability of Documents -

(a) When requesting specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications and documents required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code 10S, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120, except drawings SA-A-17931 and SA-A-19608 which are available from Naval Avionics Facility Indianapolis, Indiana 46218 only.

3. REQUIREMENTS

3.1 Preproduction Models - Unless otherwise specified in the contract or order, preproduction models of the Test Set, Guided Weapon AN/DSM-77B shall be manufactured using the methods and procedures proposed for the production models. The models shall be tested as specified in Section 4 herein for the purpose of determining that, prior to starting production, the contractors production methods are capable of yielding items that comply with the technical requirements of the contract. Production models shall not be delivered prior to approval of the preproduction models. Prefabrication of production models prior to approval of the preproduction models is at the contractors own risk. The preproduction models will be returned to the contractor for his use in the fabrication and testing of production equipment. The preproduction models shall not be considered as one of the equipments under the contract.

3.2 Parts and Materials -

3.2.1 General Requirements - The parts and materials specified in the drawings and related documents for use in construction of this equipment were selected to ensure the fulfillment of all requirements of this specification. Any deviation by the contractor from the use of these specified parts and materials necessarily places both the burden of proof for the acceptability of the change, and the cost associated therewith, upon the contractor. Approval for deviations must be requested from the procuring activity by the contractor and granted by the procuring activity prior to submission of equipment for preproduction tests. Approval of parts and material deviations shall not be construed by the contractor to constitute a waiver of the performance requirements or any other requirements of this specification.

3.2.1.1 Nonstandard Parts and Material Approval - Approval for the use of nonstandard parts and materials shall be obtained by the contractor as outlined in MIL-T-21200.

3.2.2 Supplemental Requirements - In the event that the contractor proposes to alter the equipment design delineated by this specification and applicable drawings, the following supplemental requirements for the selection of parts and material are applicable.

3.2.2.1 Basic Conformance - Parts and material selected for use in the equipment shall be in accordance with MIL-T-21200, Parts shall be selected from those parts conforming to ANA Bulletin No. 400, unless the parts listed therein will not perform adequately in the intended applications and environments specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

3.2.2.2 Interchangeability - The equipment shall meet the interchangeability requirements as specified in MIL-T-21200. Drawings conforming to DL 64A16D1368 shall be the standard for measuring interchangeability of all applicable units, assemblies, subassemblies, and parts.

3.3 Construction - The equipment shall be manufactured in accordance with the drawings and subsidiary specifications conforming to DL 64A16D1368 and related lists, except insofar as errors of omission or commission on the drawings may be incompatible with the requirements of this and related specifications. In any case, it is a condition of final acceptance that the equipment manufactured meet all the performance requirements of this specification, and such acceptance test documents as may be applicable. Proposed changes, either to correct drawing discrepancies or to effect improvements, shall be specifically approved by the procuring activity prior to their incorporation.

3.3.1 Total Weight - The total weight of the equipment, including cables, shall not exceed 70 pounds.

3.3.2 Form Factor - The over-all dimensions of the Test Set, Guided Weapon AN/DSM-77B case, excluding latches shall not exceed the following limits: Length - 22.594 inches; Width - 13.09 inches; Height - 14.51 inches.

3.3.3 Reliability -

3.3. 3.1 Operational Stability - The equipment shall have a probability of 0.9 of operating with satisfactory performance, continuously or intermittently for a period of at least 150 hours without the necessity for readjustment of any controls which are inaccessible to the operator during normal use.

3.3.3.2 Operating Life - The equipment shall have a minimum total operating life of 10,000 hours with reasonable servicing and replacement of parts. Parts requiring scheduled replacement due to wear during the life of the equipment and, the wearout life of such parts, shall be determined by the contractor and submitted to the procuring agency.

3.3.3.3 Reliability in Specified Mean-Time-Between-Failure - The specified (MTBF) (θ as outlined in MIL-STD-781) of the equipment is 200 hours when tested and accepted as outlined under the requirements of 4.4.5.

3.3.4 Interference Control - The generation of radio interference by the equipment and the vulnerability of the equipment to radio interference shall be within the limits of MIL-I-6181, except that short duration interference may deviate from the limits as outlined below in accordance with MIL-I-6181.

Switch	Maximum Duration	Deviation Permitted
S1	1 Second	20 db
S2	3 seconds	No limitation
S3	3 seconds	No limitation
S4	1 second	20 db

3.3.5 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:12Z
Check the source to verify that this is the current version before use.

Temperature	Room ambient (25 ± 5°C)
Altitude	Normal ground
Vibration	None
Humidity	Room ambient
Input power	115 ± 1.0 V AC, 60 + 10 Hz

3.3.6 Service Conditions - The equipment shall operate satisfactorily under any of the environmental service conditions, or reasonable combination of these conditions, as specified in MIL-T-21200 for Class 2 equipment.

3,3.6.1 Vibration - The test set shall conform with the applicable requirements as specified in MIL-T-21200 when secured in the transit case.

3.3.6.2 Shock - The test set shall conform with the shock requirements of MIL-T-21200. During testing, the test set (not including transit case) shall be mounted by the index pins which are compatible with the index holes provided on the nose of the WALLEYE weapon. The test set legs shall be secured to prevent separation of the test set from the WALLEYE weapon nose mock-up.

3,3.7 Primary Input Power Requirements - The equipment shall meet all applicable input power requirements as specified MIL-T-21200 for Class 2 equipment. The power required shall be of the following types and shall not exceed the specified amounts.

(a) AC Power, Single Phase, 115.0 ± 11.5V, 400 ± 20 Hz or 60 + 10 Hz, 35 VA.

(b) DC Power, Self-Contained Battery DC Power Supply, 7.2 volts nominal.

3.3.7.1 'Protection - The equipment shall be capable of withstanding input power variations as imposed by abnormal electric systems operations as specified in MIL-STD-704.

3.4 Performance - The test set shall meet the performance requirements listed on the drawings of DL 64A16D1368 in addition to the following requirements.

3.4.1 Operation - The test set shall be a portable reference target which projects an optical test pattern into the guidance section of the WALLEYE weapons. The test set shall be capable of the following:

(a) Testing the guidance section for the ability to electronically track a moving 30 to 40 percent contrast target in both the horizontal and vertical direction.

(b) Checking the resolution of the guidance section and aircraft television display as a system.

(c) Operating from self-contained, rechargeable batteries or external 115 volt a-c power, either 60 or 400 Hz,

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:12Z
Check the source to verify that this is the current version before use.

(d) Self-checking the test set battery voltage.

(e) Fastening to the weapon in a positive manner.

(f) Adjusting to check weapons which have up to 2-1/2 degrees “downlook”.

3.4.2 Lens Focus and Collimation - The target image projected by the test set shall appear, to the weapon, to be a target at infinity. The target dots, wedge shaped resolution lines, and shades of gray that make up the image shall be clear and distinct.

3.4.3 Target Pattern Position - The illuminator assembly shall be aligned such that when the target pattern is put into motion by operation of the motor, the path traveled by the center of the target shall be within the tolerances indicated in figure 1.

3,4.4 Self-Test Circuit - During battery operation, in order to indicate the need for battery recharging, lamp DS4 on the control assembly shall go out when the voltage across lamp DS3 drops to 6.6 $\pm$ 0.1 volts d-c.

3.4.5 Motor Speed - During battery operation and a-c operation, the motor shall drive the test set target pattern at a sinusoidal rate of 20 $\pm$ 10 cycles per minute,

3.4.6 Luminance Output - The luminance output of the test set shall be a minimum of 500 foot-lamberts when measured in accordance with 4,4.9.6.

3.5 Detail Requirements - The equipment shall be manufactured to meet the requirements of applicable drawings listed in DL 64A16D1368.

3.6 Workmanship Defects - The contractor is also responsible for assuring that discrepancies existing between hardware manufactured to the drawings and tested to the specification are not the result of workmanship defects.

4. QUALITY ASSURANCE PROVISIONS

4,1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government, The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of Inspections - Inspection of the equipment shall be classified as follows:

(a) Preproduction inspection

(b) Quality conformance inspection

(c) Periodic production inspection

4.2.1 Preproduction Inspection - The preproduction samples shall be subjected to the tests and examinations in the order specified in table 1. Failures of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

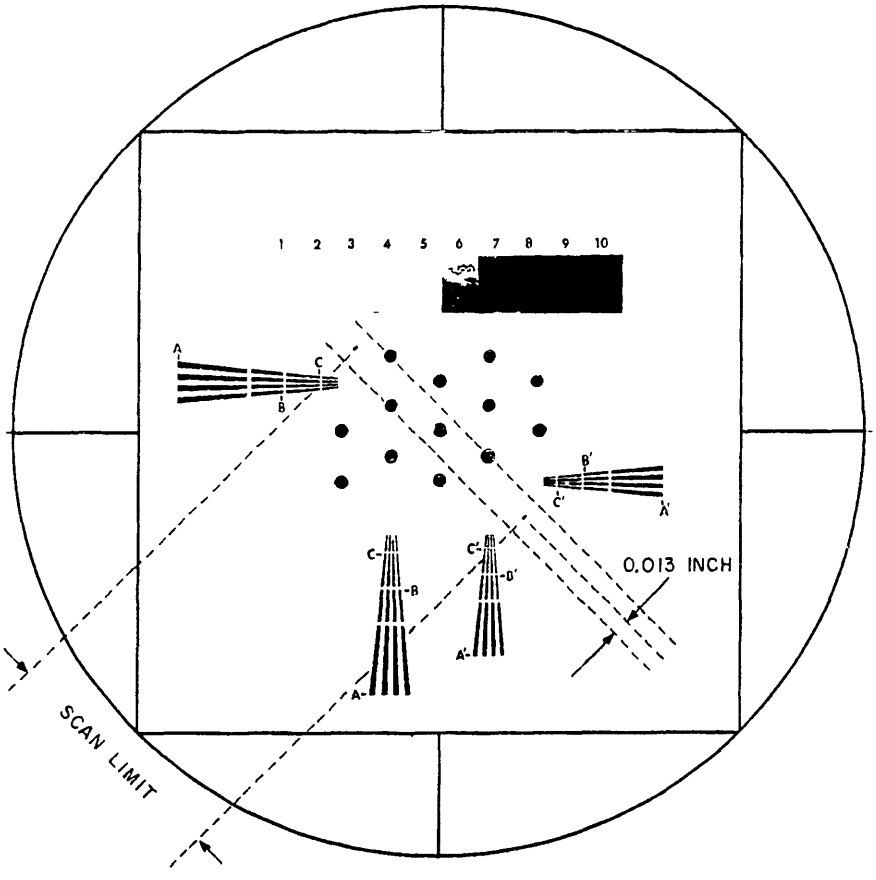


Figure 1. Alignment and Scan Limit

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

preproduction samples to pass any of the required tests or examinations shall be cause for rejection of the samples.

4.2.2 Quality Conformance Inspections - Each test set submitted for acceptance under the contract or ordez shall be submitted to the tests and inspections in the order specified in table 1. Failure of any test set to pass any of the required tests or examinations shall be cause for rejection of that test set.

4.2.3 Periodic Production Inspections - The periodic production sample selected in accordance with 4.2.2 shall be subjected to the tests and examinations in the order specified in table 1.

Table 1. Test Sequence

Item	Test	Method Paragraph	Preproduction	Quality Conformance	Periodic Production
1	Examinations	4.401	x	x	x
2	Weight	4.4.2	x		
3	Manufacturing Run-In	4*4.3	x	x	x
4	Environmental	4.4.4	x		x
5	Reliability Index Determination	4.4.5	x		
6	Reliability Assurance	4,4.6			x
7	Interference Control	4.4.7	x		x
8	Warm-Up Time	4,4.8	x		
9	Alignment	4.4.9	x		

4.3 Sampling -

4.3.1 Preproduction Sample - A preproduction sample of three test sets manufactured in accordance with 3.1 shall be subjected to the preproduction tests detailed in 4.2,1 at an activity designated by the procuring activity. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the equipment by the supplier, prior to the approval of the preproduction sample, shall be at the supplier's risk,

4.3.2 Periodic Production Sampling - Periodic production samples shall be selected from units that have satisfactorily passed the quality conformance inspections of 4.2.2. These samples shall be subjected to the tests of 4.2.3 at an activity designated by the procuring activity. Periodic production sampling shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

Quantity of Test Sets Offered for Acceptance	Quantity to be Selected For Sampling Test
First 10	1
Next 25	1
Next 50	1
Each additional 100 or fraction thereof	1

When there is a defective unit in any group, acceptance of all units on hand shall be withheld and the contractor shall:

(a) Determine the cause of the defect.

(b) Take the necessary actions to correct or eliminate the defect from all units on hand and, if so directed by the procuring activity, from those units previously shipped.

(c) Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

4.4 Test Procedures - The following test procedures shall be followed, in the sequence indicated, in the performance of all tests and examinations required. Any deviation from these procedures shall be specifically approved by the procuring activity.

4.4.1 Examinations - (M101) The test sets shall be examined to determine that all manufacturing, construction, and testing requirements of DL 64A16D1368 have been met l In addition the test set shall be examined for compliance with the following:

(a) The construction requirements of 3.3.

(b) The interchangeability requirements of 3.2.2.2.

(c) Packaging requirements of Section 5.

4.4.2 Weight - Measure the weight of the test equipment for conformance to 3.3.1.

4.4.3 Manufacturing Run-In Test - (M109) Each test set shall be operated in the a-c mode under the conditions specified herein for a period of 6 hours without failure. A failure shall be defined as anything which causes malfunctioning of the equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

Temperature	Ambient room
Humidity	Ambient room
Vibration	Any selected frequency within the range of 20 to 30 Hz (excluding resonant points) and a minimum amplitude of ±3g

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

The test sets shall be vibrated (without vibration isolators) for a period of 10 minutes prior to the beginning of the 6-hour period of operation. Where feasible, the test sets shall be operated during this vibration period for the purpose of detecting flaws and imperfect workmanship. Operation within the specified limits of satisfactory performance is not necessarily required during the vibration period. The direction of vibration should be vertical to the normal mounting plane for 5 minutes and lateral to the plane for 5 minutes. Where it is not feasible to vibrate the test set in two directions the vertical direction shall be used. During the 6-hour period of operation following the 10-minute vibration period, the test sets shall be mechanically cycled periodically through their various phases of operation. Should a failure occur, it should be repaired and the test started over, except that the 10-minute vibration period need not be repeated when it is certain the failure was not a result of the vibration. Should repetitive failures occur, corrective action shall be taken to eliminate this defect from future test sets. A record shall be kept of all failures. The 6-hour period specified above may be composed of two 3-hour periods to conform with standard working hours.

4.4.4 Environmental Tests - (M102) Environmental tests shall be conducted as specified in MIL-T-S422 to the limits as specified in MIL-T-21200 for Class 2 equipment. In addition the test set case and cover shall be subjected to the drop and water-tightness test specified in MIL-T-21200,

4.4.5 Reliability Index Determination - (M101) The test sets shall be submitted to the reliability index determination tests as specified in MIL-R-22973, Test Level II, except the temperature shall be 25 + 5° Centigrade.

4.4.5.1 Length of Tests - The total unit hours of test, not including any burn-in period, shall be 1750 hours, or until 10 failures have occurred.

4.4.5.2 Duty Cycle - The test set shall operate continuously on a 24-hour operating cycle as follows:

Switch Positions				Operating Time (Hours)	Test Set Operation
S1	S2	S3	S4		
ON	OFF	2	OFF-RECHARGE	16	RECHARGE
Not Applicable			LIGHT-MOTION	4	BATTERY MODE
ON	ON	3	OFF-RECHARGE	4	A-C Mode (See Note)

NOTE: The 4-hour time shall include the time required TO measure the performance characteristics specified in 4.4.5.3.

4.4.5.3 Performance Characteristics to be Measured - During the test the following performance characteristics shall be measured at the end of every a-c mode of operation cycle specified in 4.4,5.2.

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:12Z
Check the source to verify that this is the current version before use.

Characteristic	Specification Requiremcnt	Acceptance Requirement (if lower)
Lens Focus	3.4.2	
Target Position	3.4.3	
Self-Test Circuit	3.4.4	
Motor Speed	3.4.5	20 + 10 cycles per-minute
Luminance output	3.4.6	

4.4.5.4 Failure Criteria - In addition to the requirements of MIL-R-22973 a failure shall have occurred whenever the performance characteristics of the test set fall outside of the requirements in Section 3. If subsequent. analysis reveals that. several parts have deteriorated, each shall be counted a failure, unless one caused the other parts to fail.

4.4.6 Reliability Assurance Tests - (M101) Reliability Assurance tests shall be conducted required by MIL-STD-781 with the exceptions stated herein. Equipments selected for reliability assurance tests shall first have passed the remainder of the quality conformance tests.

4.4.6.1 Test Level - Test Level A from table 1 of MIL-STD-781 shall be used.

4.4.6.1.1 Duty Cycle - The equipment sha11 be operated continuously on a 24-hour operating cycle as follows:

Switch Positions				Operating Time (Hours)	Test Set Operation
S1	S2	S3	54		
ON	OFF	2	OFF-RECHARGE	16	BATTERY RECHARGE
Not Applicable			LIGHT-MOTION	4	BATTERY MODE
ON	ON	3	OFF-RECHARGE	4	A-C MODE (See Note)

NOTE : The 4-hour time shall include the time required to measure the performance characteristics specified in 4.4.6.3.

4.4.6.2 Test Plan - Test Plan III of MIL-STD-781 shall be used to determine the accept-reject criteria under the Reliability Qualification Phase. For Sampling phase, test plan V shall be used to determine the accept-reject criteria.

4.4.6.3 Performance Characteristics to be Measured - During the test the following performance characteristics shall be measured at the end of every a-c mode of operation cycle specified in 4.4.6.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

Characteristic	Specification and Acceptance Requirement	Acceptance Requirements (if lower)
Lens Focus	3.4.2	-
Target Position	3.4.3	-
Self-Test Circuit	3.4.4	-
Motor Speed	3.4.5	20 + 10 cycles per-minute
Luminance Output	3,4.6	

4.4.6.4 Failure Criteria - Unless otherwise defined in the contract or order, an equipment is defined to have failed whenever the performance characteristics fall below (or outside of) the required acceptance limits-of 4.4.6.3.

4.4.6.5 Preventive Maintenance - No preventive maintenance is permissible, except the replacement of burned out bulbs, and the recharging of batteries. Operational stability applies as specified in 3.3.3.

4.4.7 Interference Control - (M103) The test sets shall be tested in accordance with MIL-1-6181 within the limits of 3.3.4.1.

4.4.8 Warm-Up Time - (M104) No test set warm-up time is required.

4.4.9 Alignment - (M105) In the following tests, 115 ± 1 volt, 60 ± 10 Hz, single phase power is specified for energizing the test set in the procedures of 4.4.9.1, 4.4.9.2, 4.4.9.3, and 4.4.9.6. There shall be no deviation in the required test results specified in the procedures of 4,4.9.1, 4.4.9.2, and 4.4.9.6 when the test set is operated from 115-volt, 400 Hz, single phase power, or from battery power (six fully charged batteries). There shall be no deviation in the required test results when the test set is operated from 115-volt, 400 Hz, single phase power. The procedures for testing the alignment of the test set shall be as follows:

4.4.9.1 Lens Focus - With the telescope and reference target mounted on the applicable fixture, the telescope eyepiece shall be adjusted until the crosshairs are vividly clear. The telescope INFINITY knob shall be adjusted until the telescope is focused on the reference target crosshairs. The telescope shall then be rotated about its axis until the telescope and reference target crosshairs coincide. The target appearance shall meet the requirements of 3.4.2.

4.4.9.2 Target Positioning - With 115 ± 1 volt, 60 ± 10 Hz, single phase applied to the test set, the path of the center of the target, as observed in the telescope, shall meet the tolerances indicated in figure 1.

4.4.9.3 Battery Charging Circuit - With the batteries removed from the test set, the-battery charging circuit activated, and an 18 ohm ± 1 percent resistive load between TP1 and TP2 on the platform assembly, the test-set meter Ml shall indicate 375 + 25 ma.

4.4.9.4 Self-Test Circuit - With the batteries removed from the test set, and switch S4 placed in the LIGHT position, connect a variable d-c power supply between

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.

TP1(+) and TP2(-) on the platform assembly. Slowly decrease the input voltage from 7.0 volts d-c until lamp DS4 goes out. Lamp DS4 shall go out when the voltage across lamp DS3 is 6.6 + 0.1 volts d-c.

4.4.9.5 Motor Speed - With the batteries removed from the test set and a d-c voltage applied between T-P1(+) and TP2(-), so that the voltage measured across lamp DS3 is 6.42 0.1 volts d-c, the illuminator assembly shall travel 16 to 18 complete cycles in 60.0 seconds.

4.4.9.6 Luminance Output - Remove the batteries from the test set and apply a d-c voltage between TP1(+) and TP2(-) so that the voltage measured across lamp DS3 is 6.6 + 0.1 volts d-c. Mount the test set on Test Fixture SA-A-1793J or SA-A-19608. Allow) 15 minutes for measuring equipment to warm-up. Calibrate the spot brightness meter with SL-40 lens against the brightness source and mount the spot brightness meter on the test fixture with the center line of the spot brightness meter 0.525 + 0.010 inche above center line of the test set lens. Adjust the focus ring of the spot brightness meter for optimum indication on the meter. The spot brightness meter reading shall be a minimum of 500 foot-lamberts.

4.5 Classification of Characteristics - The characteristics verified by the tests and examinations herein are classified as Critical, Major, or Minor in accordance with WR-43. Tests and examinations that verify critical characteristics are identified by the symbol (C) and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of the test or examination. Tests and examinations which are not annotated with a classification code are classified minor.

4.6 Test Equipment and Provisions -

4.6.1 Test Equipment - Unless otherwise specified in the contract or purchase order, provision test equipment, including any necessary design, shall be the responsibility of the supplier. The special equipment necessary for testing the Test Set,Guided Weapon AN/DSM-77B is as follows:

(a) Optical Alignment Test Fixture SA-A-17931 or SA-A-19608.

(b) Photo Research Corporation Spectra Brightness Spot Meter, Model SD 1/2°, Code 190S-SB (or equivalent) with SL-40 supplementary lens and AR-50 lens holder.

(c) Photo Research Corporation Spectra Power Supply, 115-volt, 60 cps, for SB Spot Meters (or equivalent).

(d) Photo Research Corporation Spectra Regulated Brightness Source, 100 foot lamberts, 100-130 volts, 60 Hz (or equivalent).

4.6.2 Test Equipment Accuracies - Unless otherwise specified herein, the test equipment shall have accuracies equal to or better than the following:

(a) Voltage measurements - within 0.5 percent

(b) Time measurements - within 0.1 second/minute

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:12Z
Check the source to verify that this is the current version before use.

4.6.3 Test Environment - Unless otherwise specified herein, tests shall be conducted under the following conditions:

Temperature	Room ambient (25 ± 5°C)
Altitude	Normal ground
Vibration	None
Humidity	Room ambient up to 90 percent relative humidity

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, and for the level of shipment specified in the contract or order in accordance with MIL-E-17555, method II.

6. NOTES

6.2 Intended Use - The Test Set, Guided Weapon AN/DSM-77B is used to perform pre-flight GO-NO/GO tests on the WALLEYE weapon and the aircraft television system. These tests shall be performed after the weapon has been attached to the aircraft and the aircraft supplied with external power.

6.2 Ordering Data - Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Requirement for a preproduction sample (see 3.1).

6.3 Test Values - Normal and limiting values of performance data shall be determined at input voltages of 115 ± 11.5 volts a-c, 400 + 20 Hz, and 60 + 10 Hz. These data are to be used in testing the equipment at installation points for compliance with minimum acceptable standards of performance.

6.4 Precedence of Documents - Only in the event that requirements of the contract, this specification, or applicable specifications, and drawings are in conflict, the following order of precedence shall apply:

(a) The Contract

(b) This Specification

(c) Drawings listed on List of Drawings 64A16D1368

(d) Referenced Specifications

Custodian:
Navy -

Preparing Activity:
Navy -

Project No. 4935-N041

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971 -433-695/4641

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-T-81809(AS) TEST SET, GUIDED WEAPON AN/DSM-77B

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8378

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T06:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:12Z
Check the source to verify that this is the current version before use.