GGG-B-383b
August 14, 1967
SUPERSEDING
Fed. Spec. GGG-B-383a
July 30, 1954

FEDERAL SPECIFICATION

BITS, WOOD-BORING; AND CHISELS, MORTISING, HOLLOW

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hardened steel wood-boring bits and hollow mortising chisels.

1.1.1 Federal specification coverage. This specification does not cover all types and classes of wood-boring bits and hollow mortising chisels, but only those that are most generally used by the Federal Government.

1.2 Types and classes. The wood-boring bits and hollow mortising chisels shall be of the following types and classes, as specified (see 6.2):

Type I. - Bits.
- Class A. - Auger, double spur.
- Class B. - Bell-hangers'.
- Class C. - Car.
- Class D. - Expansive, plain.
- Class E. - Expansive, screw or gear adjusting.
- Class F. - Forstner, hand.
- Class G. - Forstner, machine.
- Class G-s. - Multispur Machine.
- Class H. - Gimlet, double cut.
- Class I. - Machine, with machine shank.
- Class J. - Machine, with machine shank, without flat.
- Class K. - Plug, hand.
- Class L. - Plug, machine.
- Class M. - Ship auger, with machine shank, with flat.
- Class N. - Ship auger, with straight square shank.
- Class O. - Ship auger, with ring.
- Class P. - Auger, single spur.
- Class Q. - Bits, center, flat head machine shank.

Type II. - Chisels, mortising, hollow.

Type III. - Auger bit sets.
- Class A. - In canvas, fire-resistant plastic, or imitation-leather rolls.
- Class B. - In wood, plastic, or metal boxes.

FSC 3230
FSC 5133

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Type IV. - Bits, center (flat head) in sets. Machine bits in canvas, fire-resistant plastic, or imitation-leather rolls.

2. APPLICABLE DOCUMENTS.

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Ft. Worth, Denver, San Francisco, Los Angeles, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424 - Hand Tools; Packaging of.

Military Standards:

MIL-STD - 105-Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD - 129- Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions hould be obtained from the procuring activity or as directed by the contracting office.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and are not restrictive and are not intended to preclude the purchase of bits and chisels otherwise conforming to this specification.

3.2 Material. The tool steel used in the manufacture of the bits and chisels shall be of such composition and quality as will provide the highest productive performance.

3.3 Cutting edges. All cutting edges of drills, bits, and chisels shall be machined, sharpened, hardened and tempered as indicated herein, to provide, clean, easy boring.

3.3.1 Shank. All bit and chisel shanks shall conform to shape, sizes, and dimensions specified herein. All tapers on square shank bits shall be symmetrical and shall conform to the dimensions specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.4 Hardness. Except as otherwise specified herein, all bits and chisels shall show a Rockwell hardness of 40 to 53 on the C scale, type IV bits shall show a Rockwell hardness of 47 to 62 when tested, as specified in 4.4.1.

3.5 Size accuracy.

3.5.1 Bits, other than classes D and E. The diameter of the holes bored by bits other than classes D and E shall not vary more than 1/64-inch from the bit size specified hereinafter when tested, as specified in section 4.

3.5.2 Classes D and E bits. The difference in distances measured between the screw point and spur before and after testing, as specified in section 4, shall not exceed plus or minus 1/32 inch for plain expansive bits and 1/64-inch for screw or gear adusting expansive bits.

3.6 Load test requirements. Bits over 3/8 inch in diameter shall show no permanent deflection when tested, as specified in section 4.

3.7 Longitudinal relief. The diameter of all straight bits shall be larger at the cutting head than at the shank end, known as back taper. The back taper shall be adequate to assure satisfactory boring performance when tested, as specified in section 4.

3.8 Bow. Bits shall be free from any discernible bow when tested, as specified in section 4.

3.9 Hand of operation. Unless otherwise specified (see 6.2), bits shall be for right-hand operation.

3.10 Finish. Chisel surfaces and the groove or flight and body of bits shall have a polished finish, free from scratches, when examined under bright illumination without magnification.

3.11 Marking. Bits and chisels shall be stamped or otherwise permanently marked in a plain and legible manner with size and the manufacturer's name or a trademark of such known character that the source of manufacture may be readily determined.

3.12 Type I bits.

3.12.1 Class A, bits, auger.

3.12.1.1 Construction. Unless a specific twist style is specified (see 6.2), class A bits shall be solid center single twist (figure 1), double twist (figure 2), or single twist (figure 3), at the option of the contractor. Solid center single twist and double twist bits shall have a shank, screw point, one or two spurs, and one or two extension lips so beveled as to form cutting edges. Single bits shall have a shank, screw point, extension or side lip, and a spur. Bits shall be either forged from a single piece of steel or securely welded at shank end.




FIGURE 1. Type I, class A, auger bits and type I, class C, car bits.



FIGURE 2. Type I, class A, auger bits and type I, class C, car bits.




FIGURE 3. Type I, class A, auger bits and type I, class C, car bits.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.1.2 Screw point. Unless a specific screw point is specified (see 6.2), the screw point shall be either single or double thread and either fine or medium thread (see 6.1).

3.12.1.3 Cutting edges. The cutting edges shall be located at proper distances below the spurs to insure the best performance of the bit head.

3.12.1.4 Shank. Class A auger bits shall have a square tapered bit stock shank and comply with the shank dimensions of table I.

3.12.1.5 Sizes and dimensions. Class A auger bits shall conform to the dimensional, requirements of table I for the sizes specified (see 6.2).

TABLE I. Type I, class A, auger bits

Size (bit diameter)	Length		Spur height	Diameter of shank round (min.)	Dimensions of square shank		
	Overall	Twist (min.)			Large end	Small end	Length
Inches	Inches	Inches	Inch	Inch	Inch	Inch	Inches
1/4	7-1/2	3-3/8	5/64	13/64	5/16	3/16	1-3/16
5/16	7-3/4	3-1/2	7/64	7/32	5/16	3/16	1-3/16
3/8	3-1/2	3-1/2	1/8	15/64	11/32	3/16	1-1/4
7/16	7-7/8	3-1/2	1/8	17/64	11/32	3/16	1-1/4
1/2	8	3-1/2	9/64	17/64	11/32	3/16	1-1/4
9/16	8-1/8	3-1/2	5/32	9/32	3/8	7/32	1-1/4
5/8	8-1/4	3-1/2	5/32	19/64	3/8	7/32	1-9/32
11/16	8-3/8	4	3/16	19/64	3/8	7/32	1-9/32
3/4	8-1/2	4	3/16	5/16	3/8	7/32	1-5/16
13/16	8-5/8	4-1/4	13/64	5/16	13/32	7/32	1-3/8
7/8	8-3/4	4-1/4	3/16	5/16	13/32	7/32	1-3/8
15/16	8-7/8	4-1/4	3/16	11/32	13/32	7/32	1-3/8
1	9	4-1/2	7/32	11/32	13/32	7/32	1-3/8
1- 1/16	9-1/8	4-3/4	17/64	3/8	7/16	1/4	1-3/8
1- 1/8	9-1/4	4-3/4	9/32	3/8	7/16	1/4	1-3/8
1- 3/16	9-1/4	4-7/8	9/32	3/8	7/16	1/4	1-3/8
1- 1/4	9-1/4	4-7/8	9/32	27/64	7/16	1/4	1-3/8
1- 5/16	9-3/8	4-7/8	5/16	27/64	7/16	1/4	1-3/8
1- 3/8	9-3/8	5	5/16	27/64	7/16	1/4	1-3/8
1- 7/16	9-3/8	5	5/16	27/64	7/16	1/4	1-3/8
1- 1/2	9-3/8	5	5/16	27/64	7/16	1/4	1-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Note. Tolerances:
Bit diameter: Plus 0.015, minus 0.000 inch.
Length overall: Plus or minus 10 percent of the respective lengths specified.
Height of spur: Plus or minus 1/32 inch.
Square dimension of large and small ends: Plus or minus 1/32 inch.
Length of square: Plus or minus 3/16 inch.

3.12.1.6 Spur measurement. Spur heights for type I bits shall conform to the measurements of table I when measured from the base, which is on the angle back of the cutting edge, straight up along the center line to the highest point of the crest of the spur (see figure 4).

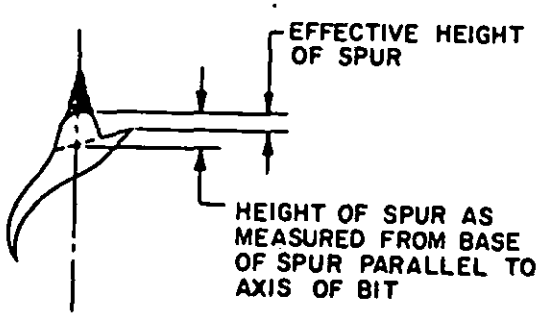


FIGURE 4. Type I, spur measurement.

3.12.1.7 Twist measurement. Twist or flute lengths shall conform to the requirements of table I when measured from the cutting edge of the bit to the extreme back end of the twist or flute, or where the twist terminates on the shank diameter.

3.12.2 Class B, bits, boll-hangers'.

3.12.2.1 Construction. Class B bits shall have a double twist, the length of which shall be not less than 3-1/2 inches and the end or head pointed and ground to an included angle of 82 degrees ± 5 degrees. Bits shall be either forged from a single piece of steel or securely welded at shank end. Hole in twist for pulling wire shall be at manufactur's option.

3.12.2.2 Sizes and dimensions. Boll-hangers' bits shall be similar to figure 5. They shall be furnished in sizes from 3/16 to 3/4 inch, inclusive, by sixteenths of an inch, and in overall lengths of 12, 18, or 24 inches, as specified (see 6.2). Dimensions shall be within the applicable tolerances specified in the footnote of table I.



FIGURE 5. Type 1, class B, boll-hangers' bits.

3.12.3 Class C, bits, car. Class C bits shall conform to type 1, class A, except that those above 3/8-inch diameter shall withstand the test specified in section 4. Class C bits shall be furnished in sizes from 1/4 to 1-1/4 inches, inclusive, in increments of 1/16 inch, with a minimum overall length of 15-3/4 inches and a length of twist of 12 inches minimum for all sizes. Bits shall be similar to figures 1, 2, or 3 (except the twisted portion is relatively longer than shown).

3.12.4 Class D, bits, expansive, plain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.4.1 Construction. Class D bits shall consist of a body formed with the shank, a clamping device, clamping screw, and two interchangeable and adjustable cutters suitable for boring holes of any diameter within the capacity range of the bit.

3.12.4.1.1 Shank. Class D bits shall have a square tapered bit-stock shank and comply with the shank dimensions in table II.

3.12.4.2 Body. The body of the expansive bit shall have a threaded screw point, a single cutting edge, and be either with our without a spur. The throat of the bit shall be open to prevent chips from choking in the throat. An index mark shall be stamped on the body or locking plate of the expansive bit as a regulating point.

3.12.4.3 Clamping device. The cutters or blades shall be held securely by means of a wedging action of a clamping device resulting from tightening the clamping screw. The device shall have sufficient rigidity so as to hold the cutter or blade firmly in place, without creeping during the process of boring. This design shall be such as to permit rapid and accurate adjustment of the cutters or blades so as to lock in the position required.

3.12.4.4 Cutters or blades. Cutters or blades shall fit the body of the bit and shall be provided with a single spur for engaging the work and a ground lip. The cutting edge shall be located below the spur. The cutters or blades shall be permanently marked with equally spaced legible graduations to permit rapid and accurate adjustment. The graduations shall be in increments of 1/32 inch.

3.12.4.5 Sizes and dimensions. Class D, plain expansive bits shall be similar to figure 6 and conform to dimensions shown in table II for sizes specified (see 6.2).




FIGURE 6. Type I, class D, plain expansive bits.

TABLE II. Type I, class D, plain expansive bits

Size (expansive) range (min.)	Overall Length		Cutter spur height	Diameter of shank round (min.)	Dimensions of square shank		
	(Min.)	(Max.)			Large end	Small end	Length
Inches	Inches	Inches	Inch	Inch	Inch	Inch	Inches
1/2 to 1-1/2	7	9	11/64	5/16	3/8	7/32	1-1/4
7/8 to 3	8-1/2	10-1/2	3/16	3/8	7/16	1/4	1-3/8

Note. Tolerances:
Height of spur: Plus or minus 1/64 inch.
Square shank dimensions of large and small ends: Plus or minus 1/32 inch.
Length of square shank: Plus or minus 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the currentversion before use.

3.12.5 Class E, bits, expansive, screw or gear adjusting.

3.12.5.1 Construction. Bits shall have a body formed integral with the shank, a clamping device, adusting gear or screw, clamping screw; and by forging or by welding at least two cutters suitable for boring holes of any diameter within the capacity range of the bit.

3.12.5.2 Body. The body of the expansive bit shall have a threaded-screw point, a single cutting edge, and be either with or without a spur.

3.12.5.3 Clamping device. The cutters or blades shall be held securely to the body of the expansive bit by means of a screw or gear which shall mesh with the teeth of the cutter or blade. This device shall have sufficient rigidity so as to hold the cutter or blade firmly in place without creeping during the process of boring. The design shall be such as to permit rapid and accurate adjustment of the cutters or blades.

3.12.5.4 Cutters or blades. The cutters or blades shall fit accurately into the body of the bit and shall be provided with a single spur for engaging in the work and a ground lip. The cutting edge shall be in advance of the spur. The cutters or blades shall have cut teeth or threads forming a rack into which the adjusting device shall mesh.

3.12.5.5 The expansive bit or cutter shall be permanently marked with equally spaced legible graduations indicating the diameter of the adjustment. The graduations shall be in increments of 1/32 inch.

3.12.5.6 Sizes and dimensions. Class E screw or gear adjusting expansive bits shall be similar to figure 7 and conform to dimensions shown in table III for sizes specified (see 6.2).




FIGURE 7. Type I, class E, screw or gear adjusting expansive bits.

TABLE III. Type I, class E, bits, expansive, screw or gear adjusting

Size (expansive range (min.)	Overall Length		Cutter spur height	Diameter of shank round (min.)			
	(Min.)	(Max.)			Large end	Small end	Length
Inches	Inches	Inches	Inch	Inch	Inch	Inch	Inches
5/8 to 1-3/4	7-1/2	9	11/64	5/16	3/8	7/32	1-1/4
7/8 to 3	8-1/2	10-1/2	3/16	3/8	7/16	1/4	1-3/8

Note. Tolerances:
Height of spur: Plus or minus 1/32 inch.
Square shank dimensions of large and small ends: Plus or minus 1/32 inch.
Length of square shank: Plus or minus 1/4 inch.

3.12.6 Class F, bits, forstner, hand.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.6.1 Construction. Class F bits shall be guided by a circular rim in lieu of a screw point. Slots in the rim shall be located in advance of the cutting edge and shall be of ample size to allow free egress of chips without heating bit excessively. Cavity within head shall be smooth and free from all obstruction to free egress of chips. Round shanks of bits 1/4 and 5/16 inch in diameter shall have a spiral flute for a distance of approximately 2-1/4 inches long to provide sufficient lip clearance.

3.12.6.2 Cutting lips. Bits 1/4 to 7/16 inch in diameter shall have a single cutting lip, and sizes 1/2 inch and larger shall have two cutting lips.

3.12.6.3 Shank. Class F bits shall have square tapered bit stock shanks 1-7/16 inches long by 7/16 inch square at the large end with a taper of 4-1/2 degrees on a side.

3.12.6.4 Sizes and dimensions. Class F bits shall be similar to figure 8 and comply with the dimensions shown in table IV for sizes specified (see 6.2).




FIGURE 8. Type I, class F, hand forstner bits.

TABLE IV. Type I, class F, bits, forstner, hand

Diameter of cutting head	Length overall	Diameter of shank round (minimum)
Inches	Inches	Inches
1/4	6-1/4	7/32
5/16	6-1/4	7/32
3/8	6-1/4	1/4
7/16	6-1/4	1/4
1/2	6-1/4	9/32
9/16	6-3/4	9/32
5/8	6-3/4	9/32
11/16	6-3/4	9/32
3/4	6-3/4	9/32
13/16	7-1/4	5/16
7/8	7-1/4	5/16

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Type I, class F, bits, forstner, hand (Cont'd.)

Diameter of cutting head	Length overall	Diameter of shank round (minimum)
Inches	Inches	Inch
15/16	7-1/4	5/16
1	7-3/4	5/16
1-1/16	7-3/4	11/32
1-1/8	7-3/4	11/32
1-3/16	7-3/4	11/32
1-1/4	7-3/4	3/8
1-5/16	8-1/4	3/8
1-3/8	8-1/4	3/8
1-7/16	8-1/4	1/2
1-1/2	8-1/4	1/2
1-5/8	8-1/4	1/2
1-3/4	8-3/4	1/2
1-7/8	8-3/4	1/2
2	8-3/4	1/2

Note: Tolerances:
Diameter: Plus 0.015 inch, minus 0.000.
Length overall: Plus or minus 3/8 inch.
Square shank dimensions of large and small ends: Plus or minus 1/32 inch.
Length of square shank: Plus or minus 1/4 inch.

3.12.7 Class G, bits, forstner, machine. Class G bits shall conform to type I, class F bits, as follows:

3.12.7.1 Shank. Bits shall have round, straight shanks 1/2 inch in diameter by a minimum of 2 inches long. Unless otherwise specified (see 6.2), the shank shall be flattened on one side to a width of 3/8 inch and a length of 1-1/2 inches.

3.12.7.2 Overall length. The overall length for diameters 1/4 to 1-3/8 inches, inclusive, shall be 5 ± 1/4 inches, and for diameters 1-7/16 to 2 inches, inclusive, the overall length shall be 6-3/4 ± 1/4 inches.

3.12.7.3 Shape. Machine forstner bits shall be similar to figure 9.




FIGURE 9. Type I, class G, machine forstner bits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.8 Class G-a, multispur bits.

3.12.8.1 Construction. Class G-a,bits shall have a multispur head with a pyramid-type square point, one cutting edge extending from the point to the outside diameter of the head cavity, a suitable number of teeth or spurs cut in the periphery so as to form cutting edges, one opening of suitable size in the head for the free egress of chips, and a plain round shank.

3.12.8.1.1 Shank. Class G-a, bits shall have round straight shanks 1/2 inch in diameter.

3.12.8.2 Sizes and dimensions. Class G-a, bits shall be similar to figure 11 and conform to the dimensions shown in table V for sizes specified (see 6.2).

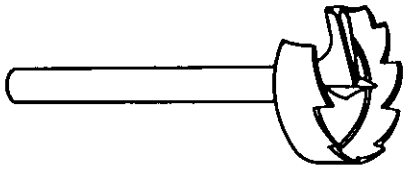


FIGURE 10. Type I, class G-a, multispur machine bits.

TABLE V. TYPE I, class G-a, multispur machine bits

Diameter of cutting head	Length overall
Inches	Inches
5/8	5-1/2
11/16	5-1/2
3/4	5-1/2
13/16	5-1/2
7/8	5-1/2
15/16	5-1/2
1	5-1/2
1-1/16	5-1/2
1-1/8	5-5/8
1-3/16	5-5/8
1-1/4	5-5/8
1-5/16	5-5/8
1-3/8	5-11/16
1-7/16	5-11/16
1-1/2	5-11/16
1-5/8	5-11/16
1-11/16	5-11/16

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE V. Type I, class G-a, multispur machine bits (Cont'd.)

Diameter of cutting head	Length overall
Inches	Inches
1-3/4	5-11/16
1-13/16	5-11/16
1-7/8	5-11/16
1-15/16	5-11/16
2	5-3/4
2-1/8	5-3/4
2-1/4	5-3/4
2-3/8	5-3/4
2-1/2	5-3/4
2-5/8	5-3/4
2-3/4	5-3/4
2-7/8	5-3/4
3	5-3/4
3-1/8	6-3/8
3-1/4	6-3/8
3-1/2	6-3/8
3-3/4	6-3/8
4	6-3/8

Note. Tolerances:
Head diameter: Plus 0.015 inch, minus 0.000.
Overall length: Plus or minus 1/2 inch.
Shank diameter: Plus 0.000, minus 0.005 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.9 Class H, bits, gimlet, bit double-cut.

3.12.9.1 Construction. The cutting edges of class H bits shall be sharpened and shall terminate in a point.

3.12.9.1.1 Shank. Class H bits shall have square tapered bit-stock shanks approximately 1-7/16 inches long by 7/16 inch square at the large end, with a taper of 4-1/2 degrees on a side.

3.12.9.2 Sizes and dimensions. Class H bits shall be similar to figure 11 and conform to the dimensions shown in table VI for sizes specified (see 6.2).




FIGURE 11. Type I, class H, double-cut gimlet.

TABLE IV. Type I, class H bits, gimlet, double-cut

Nominal size 1/	Length	
	Overall	Twist (minimum)
Inch	Inches	Inches
1/8	4-9/16	1-1/16
5/32	4-13/16	1-1/4
3/16	5-1/8	1-7/16
7/32	5-3/8	1-9/16
1/4	5-5/8	1-11/16
9/32	5-3/4	1-7/8
5/16	5-7/8	2
11/32	5	2-1/8
3/8	6-1/4	2-1/4

1/ Largest diameter of twist.

Note. Tolerances:
Nominal size: Plus 0.015 inch, minus 0.000.
Length overall: Plus or minus 3/8 inch.
Length of square shank: Plus or minus 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.10 Class I, bits, machine, with machine shank.

3.12.10.1 Construction. Unless a specific twist is specified in the contract or order (see 6.2), class I bits shall be machined drill twist (figure 12), solid center (figure 13), or wood-bit twist (figure 14), at the option of the contractor. The bits shall have a pyramid-type square point and two spurs. Machine drill twist bits and wood-bit twist bits shall be double twist and shall have two cutting edges; solid center bits (figure 12) shall be single twist and the head shall be machined so as to produce two cutting edges, the supporting twist of the additional cutting edge shall terminate directly back of the head.

3.12.10.1.1 Shank. Class I bits shall have round straight shanks 1/2 inch in diameter 2 inches long, without, with one, or with three flats, as specified (see 6.2).



FIGURE 12. Type I, class I, machine bits, with machine shank, machine-drill twist.



FIGURE 13. Type I, class I, machine bits, with machine shank, machine-drill twist.



FIGURE 14. Type I, class I, machine bits, with machine shank, wood bit twist.

3.12.10.2 Sizes and dimensions. Class I bits shall conform to the dimensions shown in table VII for sizes specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE VII. Type I, class I, machine bits, machine shank, without, with one or with three flats.

Size (bit diameter) (Inches)	Length												Spur height Inch
	Twist (Inches)						Overall (Inches)						
1/4	4	6	8				6-1/4	8-1/4	10-1/4				5/64
5/15	4	6	8	10			6-1/4	8-1/4	10-1/4	12-1/4			1/8
3/8	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		1/8
7/16	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		9/64
1/2	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		9/64
9/16	4	6	8	10	12	14	6-1/4	8-1/4	10-1/4	12-1/4	14-1/4	16-1/4	11/64
5/8	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		11/64
11/16	4	6	8	10	12	14	6-1/4	8-1/4	10-1/4	12-1/4	14-1/4	16-1/4	3/16
3/4	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		3/16
13/16	4	6	8	10	12	14	6-1/4	8-1/4	10-1/4	12-1/4	14-1/4	16-1/4	13-64
7/8	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		1/4
15/16	4	6	8	10	12	14	6-1/4	8-1/4	10-1/4	12-1/4	14-1/4	16-1/4	1/4
1	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		1/4
1-1/16	4	6	8	10	12	14	6-1/4	8-1/4	10-1/4	12-1/4	14-1/4	16-1/4	17/64
1-1/8	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		9/32
1-3/16	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		9/32
1-1/4	4	6	8	10	12		6-1/4	8-1/4	10-1/4	12-1/4	14-1/4		9/32

Note. Tolerances:
Bit diameter: Plus 0.010 inch, minus 0.000.
Length overall: Plus or minus 1/4 inch.
Height of spur: Plus or minus 1/32 inch.
Shank diameter: Plus 0.000, minus 0.005 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.11 Class J, bits, machine, with machine shank, without flat. Class J bits shall conform to the requirements for Class I, except that the shank shall not be flattened and shall be of a size diameter equal to the nominal diameter of the bit, and shall be in accordance with table VIII.

3.12.11.1 Sizes and dimensions. Round-shank machine bits shall comply with table VIII and be similar to figures 12, 13, or 14. Sizes shall be as specified (see 6.2).

TABLE VIII. Type I, class J, bits, machine, with machine shank, without flat

Size (bit diameter)	Length		Spur height
	Overall	Twist (minimum)	
Inch	Inches	Inches	Inch
1/8	3	1-13/16	3/64
5/32	3-1/4	2-3/32	3/64
3/16	3-1/2	2-5/16	1/16
7/32	3-3/4	2-17/32	5/64
1/4	4	2-3/4	5/64

Note. Tolerances:
Bit diameter: Plus 0.010 inch, minus 0.000.
Length overall: Plus or minus 1/4 inch.
Height of spur: Plus or minus 1/32 inch.

3.12.12 Class K, bits, plug, hand.

3.12.12.1 Construction. Class K, bits shall have a single-threaded screw point, one or two spurs, and one or two extension lips so beveled as to form cutting edges, and square-tapered bit-stock shanks.

3.12.12.2 Spurs and cutting edges. The cutting edges shall be located not less than 3/16 inch below the spur. Spur height shall be as indicated in table IX.

3.12.12.3 Sizes and dimensions. Class K, hand-lug bits shall be similar to figure 15 and conform to the dimensions shown in table IX for sizes specified (see 6.2).




FIGURE 15. Type I, class K, hand-plug bits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE IX. Type I, class K bits, plug, hand

Size (bit diameter)	Length		Spur height	Diameter of shank rounds (min.)	Dimensions of square shanks		
	Overall	Twist (min.)			Large end	Small end	Length
Inches	Inches	Inches	Inch	Inch	Inch	Inch	Inches
1-1/8	6	2	9/32	3/8	3/8	7/32	1-1/4
1-1/4	6	2	9/32	7/16	3/8	7/32	1-1/4

Note. Tolerances:
Bit diameter: Plus 0.005 inch, minus 0.000.
Length overall: Plus or minus 1/2 inch.
Height of spur: Plus or minus 1/64 inch.
Square shank dimensions of large and small ends: Plus or minus 1/32 inch.
Length of square shank: Plus or minus 1/4 inch.

3.12.13 Class L, bits, plug, machine. Class L, machine-plug bits shall be similar to type I, class K, with the following exceptions. Cutting head shall be similar to figure 10 for type I, class G-s.

3.12.13.1 Shank. Bits shall have round straight shanks 1/2 inch in diameter by 2 inches long. Unless otherwise specified (see 6.2), the shank shall be flattened on one side to a to a width of 3/8 inch and to a length of 1-1/2 inches.

3.12.13.2 Pilot. The bit shall have a cylindrical pilot, solid or inserted and secured by a set screw axially located, in lieu of a screw point.

3.12.13.3 Sizes and dimensions. Class L, machine plug bits shall be similar to figure 16 and conform to dimensions shown in table X for sizes specified (see 6.2).




FIGURE 16. Type I, class L, machine-plug bits.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE X. Type I, class L, bits, plug, machine

Size (bit diameter)	Length		Dimensions of pilot		Spur height	Diameter of shank round (min.)
	Overall	Twist (min.)	Diameter	Length		
Inches	Inches	Inches	Inch	Inch	Inch	Inch
1-1/8	6	2	1/2	1/2	9/32	3/8
1-1/8	6	2	9/16	1/2	9/32	3/8
1-1/4	6	2	5/8	1/2	9/32	7/16

Note. Tolerances:
Bit diameter: Plus 0.010 inch, minus 0.000.
Pilot diameter: Plus 0.000, minus 0.008.
Length overall: Plus or minus 1/8 inch.
Height of spur: Plus or minus 1/64 inch.
Guide length: Plus or minus 1/4 inch.

3.12.14 Class M, bits, ship-auger, with machine-shank, with flat or hexagon shank for use with 1/2 inch socket, three jaw chuck and hand braces.

3.12.14.1 Construction. Class M bits shall be of the single-twist type. Unless specifically required (see 6.2), at the option of the procuring agency, these bits may be furnished with or without a solid center. Bits without solid centers shall have a cutting edge and side lip located at right angles to the cutting edge. Bits shall have screw points unless otherwise specified.

3.12.14.2 Shank. Bits shall have either round straight shanks 1/2 inch in diameter by 2 inches long or hexagon shank 1/2 inch across the flats. Unless otherwise specified (see 6.2), the round shank shall be flattened on one side to a width of 3/8 inch and to a length of 1-1/2 inches.

3.12.14.3 Sizes and dimensions. Class M, ship-auger bits with no point or with screw point, shall be similar to figure 17 and conform to the dimensions shown in table XI for sizes specified (see 6.2).



FIGURE 17. Type I, class M, machine-shank ship-auger bits.

TABLE XI. Type I, class M, bits, ship-auger, with machine-shank, with flat

Size (bit diameter)	Length		Diameter of shank round (minimum)
	Overall	Twist (minimum)	
Inch	Inches	Inches	Inch
1/4	10-1/4	6	7/32
5/16	12-1/4	8	7/32
3/8	12-1/4	8	1/4
7/16	12-1/4	8	17/64

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XI. Type I, class M, bits, ship-auger, with machine-shank, with flat (Cont'd.)

Size (bit diameter)	Length		Diameter of shank round (minimum)
	Overall	Twist (minimum)	
Inch	Inches	Inches	Inch
1/2	12-1/4	8	9/32
9/16	14-1/4	10	19/64
5/8	14-1/4	10	13/32
11/16	14-1/4	10	13/32
3/4	14-1/4	10	13/32
13/16	14-1/4	10	13/32
7/8	14-1/4	10	13/32
15/16	14-1/4	10	13/32
1	14-1/4	10	13/32

Note. Tolerances:
Bit diameter at head: Plus 0.015 inch, minus 0.000.
Length overall: Plus or minus 1/2 inch.

3.12.15 Class N, bits, ship-auger, with straight square shank. Class N bits shall be similar to type I, class M, except that the shape of the shank shall be as follows:

3.12.15.1 Shank. Bits shall have either straight square shanks of the dimensions specified in table XII or hexagon shanks of the dimensions specified in 3.12.12.2 and shall be similar to figure 17. Shanks shall be suitable for use with auger handles, single or double crank handles or welding to extension stems.

3.12.15.2 Sizes and dimensions. Class N, ship-auger bits with no point or with screw point shall be *similar to figure 17 and conform to the dimensions shown in table XII for the* sizes specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XII. Type I, class K, bits, chip auger, with straight square shank or hexagon shank

Size (bit diameter)	Length		Type of Shank	
	Overall	Twist (minimum)	Square Shank (Size)	Hexagon Shank (Size)
Inches	Inches	Inches	Inch	Inch
9/16	16-1/4	12	7/16	7/16
5/8	16-1/4	12	7/16	7/16
11/16	16-1/4	12	7/16	7/16
3/4	16-1/4	12	7/16	7/16
13/16	16-1/4	12	7/16	7/16
7/8	18	12	7/16	7/16
15/16	18	12	7/16	7/16
1	18	12	7/16	7/16
1-1/16	18	12	5/8	7/16
1-1/8	18	12	5/8	7/16
1-1/4	18	12	5/8	7/16
1-3/8	18	12	5/8	7/16
1-1/2	18	12	5/8	7/16
1-3/4	18	12	5/8	7/16
2	18	12	5/8	7/16

Note. Tolerances:
Bit diameter: Plus 0.015 inch, minus 0.000.
Length overall: Plus or minus 1 inch.
Square shank size: Plus or minus 1/32 inch.
Hexagon shank diameter: Plus 0.000, minus 0.005 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.16 Class 0, bits, ship-auger, with ring, and with screw point.

3.12.16.1 Construction. Class 0, bits shall be solid-center single-twist, single-twist, or double-twist, at the option of the contractor. Bits of the solid-center design shall have two cutting edges and two spurs located at right angles to the cutting edges. Bits of the single-twist design shall have one cutting edge and one side lip at right angles to the cutting edge. Bits of the double-twist design shall have a flat-cut head and two spurs located at right angles to the cutting edge. Bits shall have medium-pitch screw points unless otherwise specified (see 6.2). Bits shall have a round-shank butt welded onto a suitable ring, and, when specified (see 6.2), in the contract or order, a handle. Size of square shall be at option of the contractor.

3.12.16.2 Shank and ring. The shank shall be fitted with a ring or eye suitable for reception of a wood handle (see 3.12.16.3), and of such strength as to withstand the test specified in section 4.

3.12.16.3 Handle. The handles shall be of hardwood, two sizes; 1 (+ 1/8, -0) inch, and 1-1/4 (+ 1/8, -0) inches diameter by not less than 12 + 1 inches long. Handles for augers to 1 inch in diameter shall have their centers turned with a slight taper so that they can be wedged tightly into the 1-inch diameter hole in the ring, and handles for augers greater than 1 inch in diameter shall have their centers turned with a slight taper so that they can be wedged tightly into the 1-1/4-inch diameter hole in the ring.

3.12.16.4 Sizes and dimensions. Class 0, bits, with no point or with screw point, shall be similar to figure 18 and conform to the dimensional requirements of table XIII for the sizes specified (see 6.2).




FIGURE 18. Type I, class 0, ring ship-auger bits.

TABLE XIII. Type I, class 0, bits, ship auger, with ring

Size (bit diameter)	Length		Diameter of shank round (minimum)
	Approximately overall	Twist (minimum)	
Inches	Inches	Inches	Inch
1/2	14-1/2	10	5/16
9/16	17-1/2	12	11/32
5/8	17-1/2	12	11/32
11/16	17-1/2	12	3/8
3/4	17-1/2	12	3/8
13/16	17-1/2	12	3/8
7/8	17-1/2	12	3/8
15/16	17-1/2	12	3/8

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XIII. Type I, class C. bits, shin-auger, with ring (Cont'd.)

Size (bit diameter)	Length		Diameter of shank round (minimum)
	Approximately overall	Twist (minimum)	
Inches	Inches	Inches	Inch
1	17-1/2	12	3/8
1-1/16	20	15	15/32
1-1/8	20	15	15/32
1-3/16	20	15	15/32
1-1/4	20	15	15/32
1-5/16	20	15	19/32
1-3/8	20	15	19/32
1-7/16	20	15	19/32
1-1/2	20	15	19/32
1-9/16	20	15	19/32
1-5/8	20	15	19/32
1-11/16	20	15	19/32
1-3/4	20	15	19/32
1-13/16	20	15	19/32
1-7/8	20	15	19/32
1-15/16	20	15	19/32
2	20	15	19/32

Note. Tolerances:
Bit diameter: Plus 0.015 inch, minus 0.000.
Length overall: Plus or minus 1/2 inch, of standard length.

3.12.17 Class P, bits, auger, single spur.

3.12.17.1 Construction. Class P bits shall conform to table I for type I, class A bits and be similar to figure 1 or 2 except class P bits shall have one spur and one cutting lip located on opposite sides of the bit.

3.12.18 Class Q, bits, center, flat head, machine shank.

3.12.18.1 Construction. Class Q bits shall be a flat head type, with center point and power bit shank. Class Q bits shall have relieved cutting lips and center points and shall be constructed of high speed steel or high carbon steel. The cutting head shall be hardened to Rockwell C 47-62. The overall length shall be 6-1/4 inches + 1/4 inch and shall be furnished in the following sizes: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16 and 1-inch. Class Q bits shall be provided with 1/4-inch round, hex, or round with a minimum of three flats; class bits shall be similar to figure 19.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the currentversion before use.




FIGURE 19. Class Q, bits, center, flat head , machine shank.

3.13 Type II, chisels, mortising, hollow.

3.13.1 Construction. Hollow chisels shall consist of a hollow mortising chisel with a bit and shall be suitable for use on a machine in mortising.

3.13.1.1 Chisel. The hollow chisel shall have a straight square blade, a shank for holding the chisel in the machine, and a shoulder between the blade and the shank. The end opposite the shoulder shall have sharp chisel edges and about midway between the cutting edges of the chisel and the shoulder there shall be provided one or more openings for chip clearance. The chisel shall have a neatly finished circular hole for the reception of the bit, and in addition, the wall of the hold shall be provided with four neatly finished chip-breaking grooves located diagonally opposite the outside corners of the blade.

3.13.1.2 Bits. With the exception of the 1/4 and 5/16 inch sizes, bits shall be of the double-twist design having a straight round shank not less than 19/64-inch diameter, and with or without a brad point (see 6.2).

3.13.1.3 Sizes and dimensions. Type II, hollow mortising chisels shall be similar to figure 20 and conform to the dimensional requirements shown in table XIV for the sizes specified (see 6.2).



FIGURE 20. Type II, hollow mortising chisels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XIV. Type II, chisels, mortising, hollow

Hollow chisel						Bit for hollow chisel	
Size of square	Blade length	Overall length	Shank 1/		Mortise depth capacity (min.)	Length of twist (min.)	Shank diameter and Overall length
			Diameter	Length			
Inch	Inches	Inches	Inches	Inches	Inches	Inches	Inches
1/4 2/	4	5-1/2	5/8	1-1/2	1-7/8	3-1/4	3/16 X 9
5/16 2/	4	5-1/2	5/8	1-1/2	1-7/8	3-1/4	1/4 X 9
3/8	4	5-1/2	5/8	1-1/2	3-1/4	6	19/64 X 9
1/2	4	5-1/2	5/8	1-1/2	3-1/4	6	19/64 X 9
5/8	4	5-1/2	3/4	1-1/2	3-1/4	6	1/2 X 9
3/4	4	5-1/2	1-1/8	1-1/2	3	6	1/2 X 9

1/For shanks with special dimensions, the make and style number or model number of the mortiser should be stated in the contract or order.

2/ Sizes 1/4 inch and 5/16 inch blades - Reinforced type.

Note. Tolerances:
Size of square: Plus or minus 0.010 inch.
Overall length of chisel and bit: Plus or minus 1/4 inch.
Length of chisel blade: Plus or minus 1/8 inch.
Length of chisel shank: Plus or minus 1/16 inch.
Diameter of chisel shank: Minus 0.0004 inch.
Diameter of chisel bit shank plus 0.000, minus 0.0001 inch.

3.14 Type III, auger bit sets.

3.14.1 Class A, auger bit sets, in canvas, fire-resistant plastic or imitation-leather rolls. Class A auger bit sets shall consist of one auger bit, type I, class A, or class B of each of the following sizes: 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, and 1 inch. Each set shall be furnished in a flexible roll or case of heavy canvas, fire-resistant plastic, or imitation-leather, with a separate pocket for each bit. The roll or case shall be of good quality and workmanship, and provided with a tie tape or buckle so arranged that the set may be easily rolled up and fastened in a secure manner. All bits in any one set shall be similar to figure 1, 2, or 5.

3.14.2 Class B, auger bit sets, in wood, plastic or metal boxes. Class B auger bit sets shall consist of one auger bit, type I, class A, of each of the following sizes: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, and 1 inch. Each set shall be furnished in a substantial wood, plastic, or metal box having a separate hole, groove, or clip for each bit, conveniently arranged for easy access. The boxes shall be well constructed, neatly finished, and except plastic boxes coated with shellac or varnish or other substances which preclude corrosion and the absorption of moisture. All bits in any one set shall be similar to figure 1 or 2.

3.14 Type IV, center bit, flat head, high speed, bit sets.

3.15.1 Each type IV set shall consist of one each, class Q, of the following sizes: 3/8, 1/2, 5/8, 3/4, 7/8, and 1 inch and shall be similar to figure 19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.15.1.1 Roll or case. Each set of auger bits shall be contained in a heavy canvas, fire-resistant plastic, or imitation-leather flexible roll or case with a separate pocket for each bit. The roll or case shall be of good quality and workmanship, provided with a tie tape or buckle so arranged that the set may be easily rolled up and fastened in a secure manner.

3.16 Workmanship. Workmanship of the auger bits and mortising chisels shall be of the quality prevailing among manufacturers normally producing auger bits and chisels of the types and classes listed herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements,as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for quality conform inspection.

4.2.1 Lot. All bits or mortising chisels of the same type, class, and size or bit sets of same class presented at one time shall be considered a lot for purposes of quality conformance inspection.

4.2.2 Quality conformance inspection. A random sample of bits or chisels shall be selected from each lot in accordance with MIL-STD-105 at inspection level II.

4.2.2.1 Examination. Each of the sample bits or chisels selected in accordance with 4.2.2. shall be visually and dimensionally examined to verify compliance with this specification. The acceptable quality level (AQL) shall be 2.5 percent defective. Any bit or chisel in the sample containing one or more defects shall not be offered for delivery. If the number of defective bits or chisels in any sample exceeds the acceptance number for that sample, the lot represented be the sample shall be rejected.

4.2.2.2 Bow. Each sample bit (except type IV flat head) shall be tested for bow. Roll bit on hard flat surface between light and eye. If any bow or runout is discernible between surface and bit, the sample bit does not comply with this specification and shall be rejected.

4.3 Quality conformance tests. Each sample bit or chisel selected in accordance with 4.2.2 shall be subjected to the tests of 4.4.1 through 4.4.5. The acceptable quality level (AQL) shall be 2.5 percent defective. Any bit or chisels containing one or more defects shall not be offered for delivery. If the number of defective bits or chisels in any sample exceeds the acceptance number for the sample, the lot represented by the sample shall be rejected.

4.4 Tests.

4.4.1 Hardness. Sample bits or chisels shall be tested to determine compliance with the hardness requirements specified in 3.4. The hardness shall be determined on a Rockwell tester or equivalent employing a diamond penetrator and a 150-kilogram major load used on opposite flats, ground on the cutter head (approximately 3/15-inch flats).

4.4.2 Accuracy of size.

4.4.2.1 Bits other than classes D and E expansive bits. A hole shall be bored through not less than 4 inches of oak, ash, or maple hardwood and the diameter measured at both ends to determine conformance with requirements listed herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

4.4.2.2. Classes D and E expansive bits. A hole shall be bored through not less than 4 inches of oak, ash, or maple hardwood with each cutter, at both the maximum and minimum extension to verify conformance with requirements listed herein.

4.4.3 Load tests. The sample bit does not comply with this specification if after applying the applicable load test requirements of 4.4.3.1 a permanent deflection results.

4.4.3.1 Auger I classes A, I, J and gimlet bits. The sample bits of type I, classes A, H, I, and J shall be clamped to a depth of 2 inches (head end) in a vise or suitable cantilever type of support and the load specified in table XV gradually applied at a point not more than 1 inch from the opposite end in a direction perpendicular to its longitudinal axis. The sample bits of type I, classes A, H, I and J shall be clamped to a depth of 2 inches (head end) in a vise or suitable cantilever type of support and the load specified in table XV gradually applied at a point not more than 1 inch from the opposite end in a direction perpendicular to its longitudinal axis. The load for type I, classes B, C and O shall be gradually applied at a point 6 ± 1/4 inches from the face of the support device.

TABLE IV. Load tests

Size (bit diameter)	Load
Inches	Pounds
7/16 to 9/16	40
5/8 to 3/4	50
13/16 to 15/16	75
1 to 1-1/8	100
1-3/16 to 1-5/16	125
1-3/8 to 1-1/2	150

4.4.4 Ship auger ring test. The shank of the bit shall be clamped firmly in a vise or suitable cantilever type of support and a handle 12 inches long inserted midway into the ring and in a horizontal position. A load of 150 pounds shall be gradually applied at a point 1 ± 1/8 inch from the end of the handle. The sample bit does not comply with this specification if after applying the above test the ring is distorted or loosened from the shank.

4.5 Inspection of preservation, packaging, packing, and marking for shipment and storage. Preservation, packaging, packing, and marking for shipment and storage shall be examined to determine conformance with the documents referenced in section 5, or as specified in the contract or purchase order.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Preservation, packaging, and packing shall be in accordance with the requirements of MIL-H-15424. Levels of preservation and packaging and level of packing shall be specified (see 6.2).

5.2 Marking.

5.2.1 Military agencies. Marking for shipment shall be in accordance with MIL-STD-129.

5.2.2 Civil agencies. Marking for shipment shall be in accordance with the standard marking of Fed. Std. No. 123.

6. NOTES

6.1 Intended use. The bits and mortising chisels described in this specification are intended for use as wood-working tools for drilling holes or mortising operations. Auger bits may be obtained with the following screw points: fine, for cabinet work; medium, for general purpose boring and ordinary work; and coarse, for rapid operation, particularly in rough work. Table XVII indicates the screw points ordinarily available.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XVI. Available screw points

Bit diameter (inch)	Approx. number of threads per inch	Type of thread	Approx. number of threads on point	Bit diameter (inch)	Approx. number of threads per inch	Type of thread	Approx. number of threads on point
Fine thread							
3/16	32	Double	4	5/8	24	Double	7
1/4	30, 32	Double	6	11/16	24	Double	8
5/16	28	Double	6	3/4	24	Double	8
3/8	24	Double	6	13/16	24	Double	9
7/16	24	Double	6	7/8	24	Double	10
1/2	24	Double	6	15/16	24	Double	10
9/16	24	Double	7	1	24	Double	10
Medium thread							
3/16	32	Double	4	9/16	14, 15, 16	Single	5
1/4	28,30, 32	Double	6	5/8	14, 15, 16	Single	5
1/4	18	Single	6	11/16	14, 15, 16	Single	5
5/16	24,26, 28	Double	6	3/4	14, 15, 16	Single	6
5/16	18	Single	6	13/16	14, 15, 16	Single	6
3/8	28	Double	6	7/8	16	Single	6
3/8	12	Single	6	15/16	16	Single	6
7/16	28	Double	6	1	16	Single	6
7/16	14, 16	Single	6				
1/2	20	Double	6				
1/2	14	Single	6				
Coarse thread							
3/16	20	Single	3	5/8	10 to 14	Single	3
1/4	18	Single	3	11/16	10 to 14	Single	3
5/16	16	Single	3	3/4	10 to 14	Single	3
3/8	14	Single	3	13/16	10 to 14	Single	4
7/16	12	Single	3	7/8	10 to 14	Single	4
1/2	12, 13, 14	Single	3	15/16	10 to 14	Single	4
9/16	12, 13, 14	Single	3	1	10 to 14	Single	4

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.

(b) Type, class, and size of bit or chisel required. (See 1.2, 3.12.1.5, 3.12.2.2, 3.12.4.5, 3.12.5.6, 3.12.6.4, 3.12.8.2, 3.12.9.2, 3.12.10.2, 3.12.11.1, 3.12.12.3, 3.12.13.3, 3.12.14.3, 3.12.15.2, 3.12.16.4 and 3.13.1.3.

(c) If other than right-hand bit is required. (See 3.9.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

(d) For type I.

(1) If other than flattened shank is required on classes G, I, L, and M bits. (See 3.12.7.1, 3.12.10.1.1, 3.12.13.1 and 3.12.14.2.).

(2) When handle is required for class O. (See 3.12.16.1).

(3) In addition to the above, purchasing officers may exercise the options contained in 3.12.1.1, 3.12.1.2, 3.12.5.2, 3.12.10.1, 3.12.14.1, 3.12.16.1 and 3.12.16.4.

(e) For type II.

(1) The name of the manufacturer and style number of machine on which the chisels are to be used, and the dimensions of the chisel, if and when sizes differing from table XIV are required.

(2) Whether chisel bits are required with or without brad point. (See 3.13.1.2.).

(f) Applicable levels of preservation and packaging and level of packing required (see 5.1).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 69

Review activities:

Army - GL
Navy - SH
Air Force - 69

User activities:

Army - CE, ME
Navy - MC, YD

Civil Agency Interest:

GSA-FSS

Preparing activity:

Navy - SH

83)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.