GGG-B-425
May 1, 1975

FEDERAL SPECIFICATION

BLADE, RECIPROCATING SAW

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers blades for use in portable electric reciprocating saws.

1.1.1 Federal specification coverage. This specification does not include all varieties of reciprocating saw blades that are commercially available, but is intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Blades shall be of the following types and styles as specified (see 6.2):

Type I - 1/4-inch shank.
  Style A - Wood cutting.
  Style B - Metal cutting.
  Style C - Knife edge.

Type II - 1/2-inch shank.
  Style A - Wood cutting.
  Style B - Metal cutting.
  Style C - Knife edge.

1.2.2 Size. Blades shall be of the size shown in tables I and II and as specified (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3.2 Design and construction. The saw blades shall be suitable for use on most commercially available reciprocating saws that are designed to accommodate a "universal" style of shank. The teeth shall be uniform in shape and size, and shall be ground or otherwise sharpened so that cutting will occur on the reverse stroke. The blades shall be straight and flat with a maximum bow of 0.02 inch and a maximum twist of 0.01 inch.

3.2.1 Type I blades. Type I blades shall be suitable for use in reciprocating saws where the blade is mounted at right angle to the motor axis. The blades shall be similar to figure 1 and conform to the requirements shown in table I, for the style and size specified see 6.2.

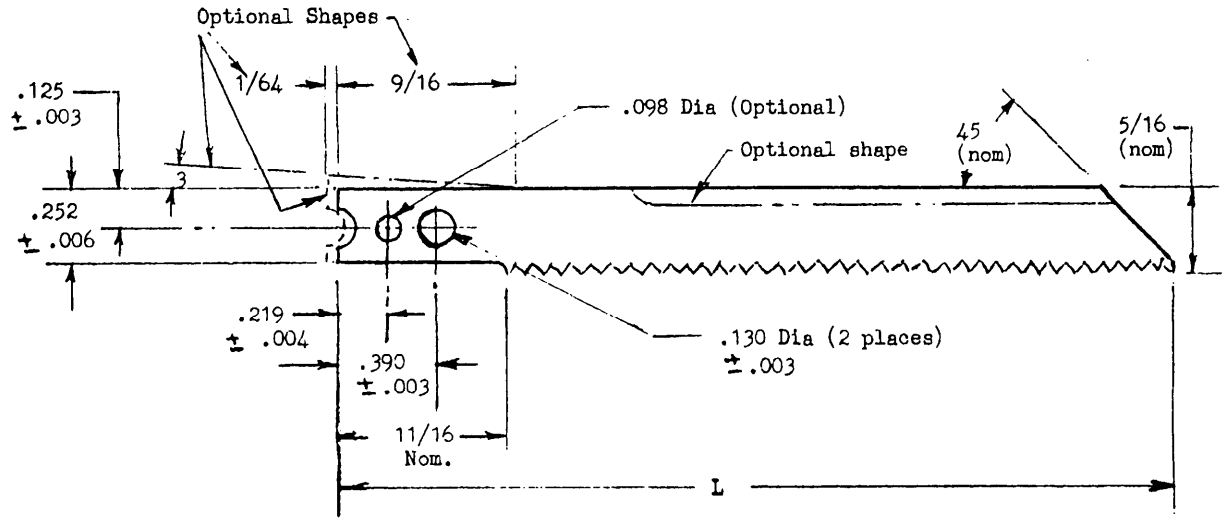


FIGURE 1. Type I, 1/4-inch shank blades.

TABLE I. Type I saw blades

Style	Size	No. of teeth per inch	L Length - inches (minimum)	Blade thickness inch - minimum
A	1	6 to 7	2-7/8	0.040
	2	10 to 12	2-7/8	.040
B	1	14 to 18	2-7/8	.030
	2	24	2-3/4	.030
	3	32	2-1/2	.030
C		None	2-7/8	.030

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.2.2 Type II blades. The type II blades shall be suitable for use in reciprocating saws where the blade is mounted in line with the motor axis. The blades shall be similar to figure 2 and conform to the requirements shown in table II, for the style, size, and number of teeth specified see 6.2.

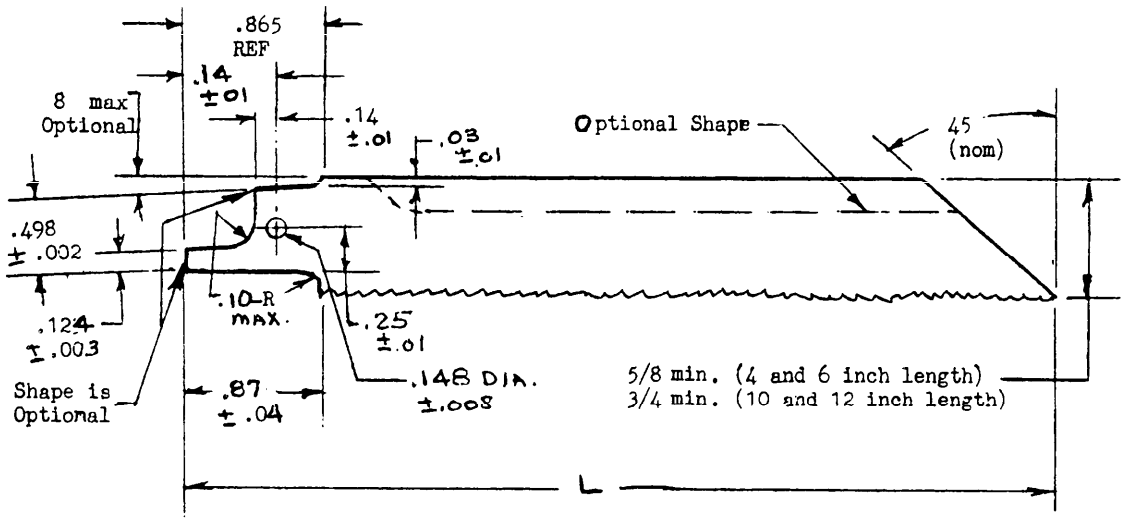


FIGURE 2. Type II, 1/2 inch shank blades.

TABLE II. Type II saw blades

Style	Size	Length (inches) L ±1/8	No. of teeth per inch (See 6.2c)	Blade thickness inch (minimum)
A	1	4	6 to 7 or 10 to 12	0.040
	2	6	6 to 7 or 10 to 12	.040
	3	10	6 to 7 or 10 to 12	.045
	4	12	6 to 7 or 10 to 12	.045
B	1	4	14 or 24 or 32	.030
	2	6	14 or 24 or 32	.035
C		4	None	.040

3.2.3 Style A blades. All type I and type II style A blades shall be suitable for use in cutting nail-free wood, shall be made of carbon or alloy steel, and hardened to Rockwell C 41 to 47. The teeth shall have a raker or alternate set, a back clearance of 50° to 70°, and a maximum negative rake of 10°, see figures 3 and 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

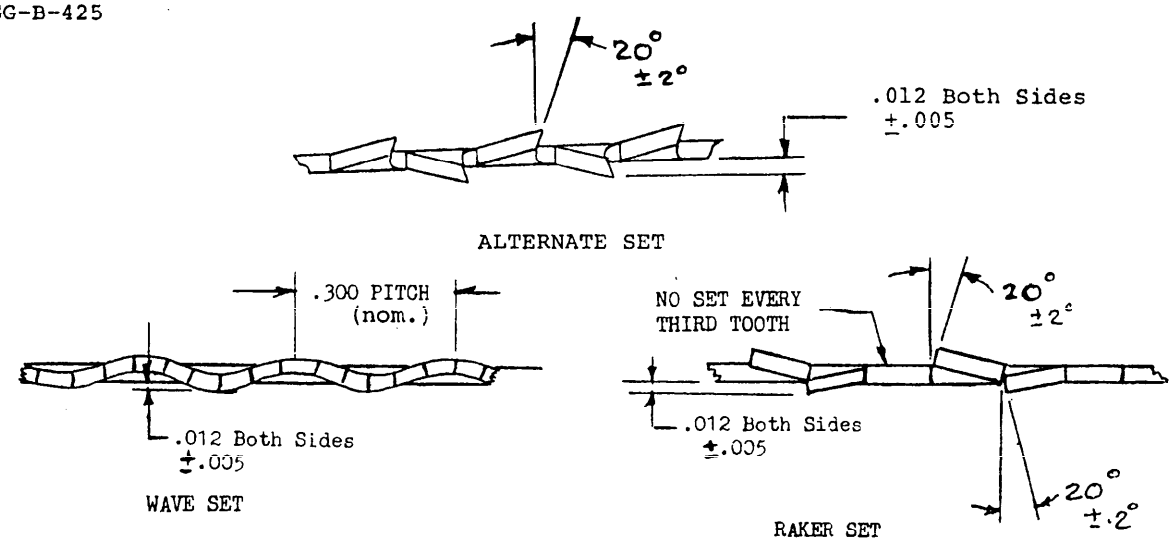


FIGURE 3. Tooth set.

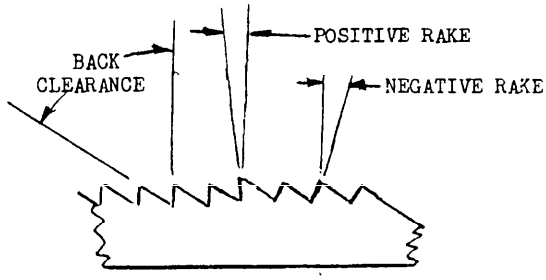


FIGURE 4. Back clearance and rake angles.

3.2.4 Style B blades. All type I and type II style B blades shall be suitable for use in cutting metals, plastics, and fiberglass; shall be made of high-speed steel and hardened to Rockwell C 60 to 66. The teeth shall have a wave set, a back clearance of 50° to 70°, and a rake of 0° ±5°, see figures 3 and 4.

3.2.5 Style C blades. All type I and type II style C blades shall be suitable for use in cutting cardboard, leather, hard rubber, and felt materials; shall conform to the applicable requirements of figure 1 or 2, for the type specified see 6.2, except that the cutting edge shall have a sharp knife edge in lieu of the teeth; shall be made of steel; and hardened to Rockwell C 52 to 66.

3.3 Coating. All blades shall have a protective coating of oil, paint, or lacquer in accordance with the manufacturer's commercial practice.

3.4 Workmanship. The blades shall be free of any defects that may affect serviceability, performance, or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspections as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Lot. A lot for inspection purposes shall consist of all blades of one type, style, and size offered at one time for acceptance.

4.3 Sampling. Sampling for acceptance inspection shall be conducted in accordance with Inspection Level S-2 of MIL-STD-105 with an Acceptable Quality Level (AQL) of 2.5 percent defective.

4.4 Examination. Each sample blade shall be examined for conformance to design and construction, dimensions, number of teeth, and coating.

4.4.1 Examination of preparation for delivery. An examination shall be made to determine compliance with preservation, packaging, packing, and marking in accordance with PPP-P-40.

4.5 Hardness test. Each sample blade shall be tested for hardness using a reliable commercial hardness tester. Test readings shall be made at three different locations on the blade; one on the shank, one on the opposite end, and one at center of blade near the tooth section. All three readings shall be within the value specified for the applicable blade.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The blades shall be packaged, packed, and marked in accordance with PPP-P-40. Packaging shall be level A, B, or C as specified (see 6.2), packing shall be level A, B, or C as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

6. NOTES

6.1 These blades are intended for use in portable, electric reciprocating saws with a maximum speed of 2600 strokes per minute with a maximum length of stroke of 3/4 inch.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and size blade required (see 1.2.1).
(c) Specify number of teeth if type II blade is required (see 3.2.2).
(d) Level of packaging and packing and type of marking required (see 5.1).

MILITARY INTERESTS:

DOD has waived coordination on revisions and amendments to this Federal Specification until further notice.

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.