GGG-B-440b
September 25, 1964

SUPERSEDING
Fed. Spec. GGG-B-440a
June 20, 1958

FEDERAL SPECIFICATION

BLADE, CIRCULAR SAW, WOODCUTTING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers circular saw blades for bench-mounted and floor-mounted, woodcutting circular saws, power-driven saws, and portable circular saws.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types and classes.* Circular saw blades shall be of the following types and classes, as specified (see 6.2):

Type I—Crosscut.
  Class 1—Flat ground.
  Class 2—Hollow ground.

Type II—Rip.
  Class 1—Flat ground.

Type III—Combination.
  Class 1—Flat ground.
  Class 2—Hollow ground.

Type IV—Dado heads.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specifications:

PPP-B-585—Boxes, Wood, Wirebound.
PPP-B-591—Boxes, Fiberboard, Wood-Cleated.
PPP-B-601—Boxes, Wood, Cleated-Plywood.
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636—Box, Fiberboard.
PPP-C-843—Cushioning Material, Cellulosic.
PPP-T-60—Tape; Pressure Sensitive Adhesive, Waterproof—For Packaging and Sealing.
PPP-T-76—Tape, Pressure-Sensitive Adhesive, Paper, (For Carton Sealing).

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE I.—*Chemical composition*

Carbon	Manganese (maximum)	Nickel (minimum)	Silicon	Chromium (maximum)	Phosphorus (maximum)	Sulphur (maximum)	Molybdenum[1] (maximum)
Percent	*Percent*	*Percent*	*Percent*	*Percent*	*Percent*	*Percent*	*Percent*
0.70—0.80	0.70	0.60	0.20—0.35	0.25	0.025	0.025	0.20

[1] Optional.

City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116—Preservation, Methods of.
MIL-B-121—Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-P-3420—Packaging Materials, Volatile Corrosion Inhibitor, Treated, Opaque.
MIL-I-6868—Inspection Process, Magnetic Particle.
MIL-L-10547—Liners, Case and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Material.** Circular saw blades shall be made of steel having essentially the chemical and mechanical properties shown in tables I and II and shall be free from cracks, segregations, seams, hammer marks, high spots or other imperfections that may affect their serviceability.

TABLE II.—*Mechanical properties (nominal) at Rockwell C45*

Tensile strength	215,000 p.s.i.
Yield strength	195,000 p.s.i.
Elongation at 2 inches (percent)	6
Reduction area (percent)	25

3.1.1 The values designated in tables I and II are nominal and not restrictive. Comparable blade material may be used provided the impact strength, cutting wear resistance, and thermal stability properties equal or exceed those afforded by the specified steel.

3.2 **Uniformity of thickness.** The nominal thickness of the blades is shown in tables III through VII, inclusive, (for the tolerance, see 3.6). The nominal thickness of the flat ground blades shall be designated by a single dimension covering every part of the blade. Uniformity of thickness for both flat ground and hollow ground blades, along any circumference generated by a radius, shall be uniform within plus or minus 0.001 inch. For flat ground only, the thickness in any radial direction shall be uniform within plus or minus 0.0015 inch. Hollow ground blades, which are thinner in back of the rim for clearance, are designated by three dimensions, at the rim, the thinnest circle, and the collar, in that sequence.

3.3 **Hardness.** All blades, except hollow ground, shall be hardened and tempered to a Rockwell C hardness of not less than 42 nor more than 48. Hollow ground blades shall have a Rockwell C hardness of not less than 46 nor more than 52.

3.4 **Tooth profile.** The profile of teeth shall conform to the styles shown on figure 1 and as specified herein for the individual types and classes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.



STYLE-A




STYLE-U



STYLE-V




STYLE-L

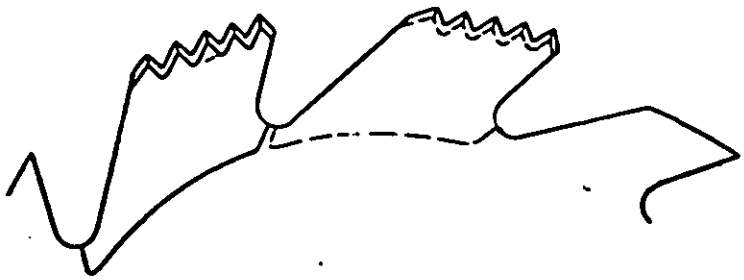

STYLE-Y



STYLE-M



STYLE-BB



STYLE-P



STYLE-S



STYLE-SPECIAL

Figure 1.
Saw blade teeth profiles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.5 **Arbor holes.** Unless otherwise specified (see 6.2), the arbor holes shall be round. The arbor hole diameter for all blades shall be as specified (see 6.2). If specified, blades up to and including 12 inches in diameter with round arbor holes shall be furnished with adapter bushings as follows:

6- through 8-inch blades—5/8-inch arbor hole bushed to 1/2 inch.
9- through 10-inch blades—3/4-inch arbor hole bushed to 5/8 inch.
12-inch blades—1-inch arbor hole bushed to 3/4 inch.

3.6 **Tolerances.** The following tolerances will be permitted:

Arbor holes:
Plus 0.003 inch and no minus tolerance.

Nominal rim diameters:
6- to 10-inch diameter blades, plus 0.063 inch, minus 0.
10- to 24-inch diameter blades, plus 0.125 inch, minus 0.
Over 24-inch diameter blades, plus 0.187 inch, minus 0.

Nominal blade thickness:
Flat and hollow ground blades, 10-inch diameter and under, plus or minus 10 percent; over 10-inch diameter, plus or minus 6 percent.

Number of teeth:
Plus or minus 10 percent.

Lateral runout:
Lateral or transverse runout as measured just inside the tooth gullet line shall not exceed 0.0004-inch per inch of blade diameter—static measurement total indicating reading (T.I.R.).

Peripheral runout:
Peripheral runout as measured at the tips of the cutting teeth shall not exceed 0.0006 inch per inch of blade diameter—static measurement T.I.R.

3.7 **Identification marking.** Each blade shall be permanently marked with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined. The marking shall be applied in a manner that will preclude damage to the blades.

3.8 **Finish.** The sides of all blades shall be uniformly ground to a bright, smooth finish of 63 microinches or less. When specified (see 6.2), chrome plated blades shall be furnished.

3.9 **Tensioning.** Blades of 7 inches or over in diameter shall be tensioned for a rim speed of 10,000 surface feet per minute (s.f.m.). When specified (see 6.2), blades may be tensioned for other angular velocities.

3.10 **Type I, crosscut.**

3.10.1 *Class* 1, *flat ground.* The blades shall have style L teeth, as shown on figure 1, shall be spring set and bevel filed, and shall be adapted for crosscutting. The blades shall conform to the dimensions and number of teeth shown in table III, as specified (see 6.2). When specified (see 6.2), blades 36 inches and larger in diameter shall have style M teeth as shown on figure 1.

TABLE III.—*Type I, class* 1, *flat ground, crosscut blades*

Diameter	Thickness	Number of teeth
Inches	*Inch*	
6	0.058	100
7	.058	100
8	.058	100
10	.065	100, 150
12	.083	70, 100, 150
12	.109	70, 100
14	.083	60, 80, 100, 150
14	.095	80, 100
16	.083	60, 80, 100, 150, 200
16	.095	60, 80, 100, 150
16	.109	60, 80, 100
18	.095	60, 80, 100
18	.109	60, 80, 100
18	.134	80
20	.095	80
20	.109	60, 70
20	.134	70
22	.109	70
22	.134	60
24	.120	70
24	.134	70
26	.134	70
28	.134	70
30	.134	70
30	.148	70
42	.165	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.10.2 *Class 2, hollow ground.* The blades shall have style P teeth, as shown on figure 1, shall be bevel filed, and shall be adapted for crosscutting. The blades shall be hollow ground and conform to the dimensions and number of teeth shown in table IV, as specified (see 6.2).

TABLE IV.—*Type I, class 2, hollow ground, crosscut blades*

Diameter	Thickness (see 3.2)			Number of teeth
	Rim	Thinnest circle	Collar	
Inches	*Inch*	*Inch*	*Inch*	
8	0.95	0.058	0.095	100
10	.109	.065	.109	100
12	.120	.072	.120	120, 150
14	.134	.083	.134	140
16	.134	.083	.134	130
18	.148	.095	.148	150
18	.165	.109	.165	100, 150
20	.180	.120	.180	100, 150
22	.180	.120	.180	100, 140
24	.203	.134	.203	120
24	.203	.120	.203	120

3.11 Type II, rip.

3.11.1 *Class 1, flat ground.* The blades shall have style A teeth, as shown on figure 1, shall be filed and spring set, and shall be adapted for ripping. The blades shall conform to the dimensions and number of teeth as shown in table V, as specified (see 6.2).

TABLE V.—*Type II, class 1, flat ground, rip blades*

Diameter	Thickness	Number of teeth
Inches	*Inch*	
6	0.058	40
7	.058	40
8	.058	36
10	.065	36
10	.083	30, 36
10	.095	30
10	.109	24, 30
12	.083	24, 30, 36
12	.109	24, 30, 36
14	.083	36
14	.109	36
16	.083	36
16	.109	36
18	.095	30, 36
18	.109	30, 36
20	.095	36
20	.109	36

3.12 Type III, combination.

3.12.1 *Class 1, flat ground.* The blades shall have teeth conforming to style S, U, or V, or style Special, as shown on figure 1, and as specified (see 6.2). The teeth shall be filed and set in accordance with the regular trade practice and adapted for crosscutting, ripping and mitering. The blades shall conform to the dimensions and number of teeth or teeth sections as shown in table VI, as specified (see 6.2).

TABLE VI.—*Type III, class 1, flat ground, combination blades*

Diameter	Thickness	Number of teeth or sections	Style of teeth
Inches	*Inch*	*Number of sections*	
6	0.058	10, 12	S
7	.058	10, 14	S
8	.058	12, 14	S
9	.065	12, 14, 16	S
10	.065	16	S
12	.083	18	S
14	.095	18, 20	S
16	.095	20, 22	S
8	.058	16	U
9	.065	16	U
10	.065	18	U
12	.083	20	U
14	.083	22	U
16	.095	24, 26	U
20	.109	28	U
		Number of teeth	
6	.058	20	V
7	.058	20—24	V
8	.058	20—24	V
9	.065	20—30	V
10	.065	44	V
12	.083	44	V
14	.083	44	V
14	.095	44	V
16	.095	44	V
18	.109	44	V
		Number of sections	
6	.058	8, 12	Special
7	.058	8, 12	Special
8	.065	8, 12	Special
9	.065	8, 12	Special
10	.083	8, 12	Special
12	.083	8, 12	Special
14	.083	8, 12	Special
16	.109	8, 12	Special

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.2 *Class 2, hollow ground.* The blades shall have style S teeth as shown on figure 1. The teeth shall be filed in accordance with the regular trade practice. The blades shall be hollow ground and conform to the dimensions and number of teeth sections as shown in table VII, as specified (see 6.2).

TABLE VII.—*Type III, class 2, hollow ground, combination blades*

Diameter	Thickness (see 3.2)			Number of sections
	Rim	Thinnest circle	Collar	
Inches	*Inch*	*Inch*	*Inch*	
6	0.065	0.042	0.065	10, 12
7	.083	.058	.083	10, 14
8	.083	.058	.083	12, 14
9	.083	.058	.083	12, 14, 16
10	.095	.065	.095	16
12	.109	.072	.109	18
14	.120	.083	.120	18, 20
16	.120	.083	.120	20, 22
18	.134	.095	.134	22, 24
20	.134	.095	.134	24, 26
24	.148	.109	.148	[illegible]

3.13 **Type IV, dado heads.** Dado heads shall consist of two hollow-ground outside blades with one or more filler blades of any of the thicknesses shown in table VIII, as specified (see 6.2). The outside blades shall be hollow ground and of uniform thickness at rim and collar. The outside blades shall have style Y teeth, and the filler blades shall have style BB teeth, as shown on figure 1. The two sets of cutting teeth shall be beveled alternately to the right and left. The blades shall conform to the dimensions as shown in table VIII, as specified (see 6.2). The diameter of the blades shall be within a tolerance of plus 0.005 inch, minus 0.003 inch.

TABLE VIII.—*Type IV, dado heads*

Diameter of outside blades and fillers	Thickness of outside blades	Thickness of filler blades
Inches	*Inch*	*Inch*
5	1/8	1/16, 1/8, 1/4
6	1/8	1/16, 1/8, 1/4
7	1/8	1/16, 1/8, 1/4
8	1/8	1/16, 1/8, 1/4
9	1/8	1/16, 1/8, 1/4
10	1/8	1/16, 1/8, 1/4
11	1/8	1/16, 1/8, 1/4
12	1/8	1/16, 1/8, 1/4
14	1/8	1/16, 1/8, 1/4
16	1/8	1/16, 1/8, 1/4
18	1/8	1/16, 1/8, 1/4

3.14 **Workmanship.** The workmanship, including finish and appearance, shall be first-class and equal in every respect to the best commercial practice.

3.15 **Illustrations.** The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of saw blades which are otherwise in accordance with the requirements of the specification.

4. SAMPLING INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling for quality conformance inspection.**

4.2.1 *Lot.* All blades of the same type, class, diameter, and style of teeth offered for delivery at one time shall be considered a lot.

4.2.2 *Sampling for visual and dimensional examination.* A random sample of blades shall be selected from each inspection lot of material with lot acceptance based on the single sampling inspection requirements in accordance with MIL-STD-105 and table IX.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE IX.—*Sampling for visual and dimensional examination AQL (approx.) — 1.5 percent defective*

Number of blades in inspection lot	Sample size, number of blades to be selected for examination (reference MIL-STD-105)
40 and under	Inspection level III
41 to 300	Inspection level II
301 and over	Inspection level I

NOTE: Tightened or reduced inspection in accordance with section 7 of MIL-STD-105 may be instituted.

4.2.3 *Sampling for hardness test.* A random sample of blades shall be selected from each inspection lot in accordance with the table for small sample inspection in MIL-STD-105 at inspection level S-4 and shall be subjected to the hardness test specified in 4.4.

4.3 Visual and dimensional examination. Each of the sample blades selected in accordance with 4.2.2 shall be visually and dimensionally examined to verify compliance with this specification. Examination shall be conducted as specified in table X. Any blade in the sample containing one or more visual and dimensional defects shall not be offered for delivery. If the number of defective blades in any sample exceeds the acceptance number for the sample, this shall be cause for rejection of the lot represented by the sample.

TABLE X.—*Classification of defects in accordance with MIL-STD-105*

Categories	Defects
Critical:	None defined.
Major:	
101	Type, class, diameter, arbor hole size, thickness, and number of teeth of saw blade not as specified.
102	Blade not uniformly ground; evidence of cracks, segregations, seams, hammer marks, or high spots; blade warped.
103	Blade thickness not uniform within the specified tolerance (flat ground blades only).
104	Blade thickness at rim, thinnest circle, or collar not uniform within the specified tolerance (hollow ground blades only).
105	Arbor hole diameter not within the specified tolerance.
106	Teeth not the required style.
107	Teeth not spring set and bevel filed as required; evidence of nicks, fins, or burrs.
Minor:	
201	Blade thickness not within the specified tolerance (flat ground blades only).
202	Blade thickness at rim, thinnest circle, or collar not within the specified tolerance (hollow ground blades only).
203	Rim diameter not within the specified tolerance.
204	Number of teeth not within the specified tolerance.
205	Marking, manufacturer's name or trademark missing, illegible, or not permanent.

4.3.1 *Cracks and imperfections.* Each of the sample blades shall be examined to determine full compliance with 3.1. Any indication of flaws, cracks, or imperfections shall be grounds for rejection. Examination shall be performed by a process subject to the approval of the bureau or activity concerned. Unless otherwise specified (see 6.2), examination shall be performed in accordance with MIL-I-6858.

4.4 Hardness test. Each of the sample blades selected in accordance with 4.2.3 shall be subjected to a Rockwell hardness test to determine compliance with 3.3. If any blade in the sample fails this test, this shall be cause for rejection of the lot represented by the sample.

4.4.1 *Possible test failures.* Possible test failures are defined as follows:

(a) *Hardness.*
  (1) Hardness of blade not within the specified values on the Rockwell C scale.

4.5 Examination of preparation for delivery. The preservation, packaging, packing, and marking shall be examined to determine compliance with the requirements of section 5 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

(For civil agencies, Fed. Std. No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Preservation and packaging. Preservation and packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A.* Except for chrome-plated blades, cleaning preservation, and packaging of all blades shall be in accordance with MIL-P-116, as applicable. Blades with chrome plating completely covering all surfaces, and applied after sharpening of teeth, need not be coated with grease. Lacquered blades shall not be cleaned.

5.1.1.1 *Blades weighing less than 10 pounds.* Unless otherwise specified in the contract or order (see 6.2), blades weighing less than 10 pounds shall be completely coated with type P-1 preservative and individually wrapped with greaseproof barrier-material conforming to type II, grade A, class 1 of MIL-B-121, and secured in place with pressure-sensitive tape conforming to type II, class 1 of PPP-T-60. The wrapped blades shall be individually packaged or, when specified (see 6.2), packaged together in quantities not to exceed 6 blades in snug-fitting fiberboard boxes conforming to PPP-B-636. Cellulosic cushioning material conforming to type III, class C of PPP-C-843 shall be provided to prevent damage to the saw blade teeth and to the boxes. Boxes conforming to PPP-B-636 shall be closed and sealed in conformance with the appendix to the box specification, and, in addition, all joints and seams, including those occurring in the manufacture of the boxes, shall be covered with minimum 2-inch-wide pressure sensitive tape conforming to PPP-T-76, extended over all corners and edges at least 3 inches. Boxes conforming to PPP-B-636 shall be closed and sealed in accordance with the appendix thereto.

5.1.1.1.1 *Alternate methods.*

5.1.1.1.1.1 When specified (see 6.2), the cleaned blades shall be dipped in a thin film of preservative oil and covered on both sides with a sheet of vapor-phase inhibitor paper in accordance with MIL-P-3420. Blades shall be separated with a layer of corrugated fiberboard to provide cushioning and protection and shall be unit protected by a suitable submethod IA in accordance with MIL-P-116.

5.1.1.1.1.2 When specified (see 6.2), blades after cleaning shall be unit protected by method IB-1 in accordance with MIL-P-116.

5.1.1.2 *Blades weighing 10 pounds and over.* Blades weighing 10 pounds and over shall be completely coated with type P-1 preservative and individually wrapped with greaseproof barrier-material conforming to type II, grade A, class 1 of MIL-B-121, secured in place with pressure-sensitive tape conforming to type III, class 1 of PPP-T-60. The wrapped blade shall be secured by bolting through the arbor hole to a single piece of 1/4-inch-thick plywood extending beyond the perimeter of the wrapped blade 1/4 inch. Each blade shall be packaged in snug-fitting fiberboard box conforming to PPP-B-636, compliance symbol as applicable. Cellulosic cushioning material conforming to type III, class C of PPP-C-843 shall be provided within the boxes. The boxes shall be closed and sealed in conformance with the appendix to the box specification, and, in addition, all joints and seams, including those occurring in the manufacture of the boxes, shall be covered with minimum 2-inch-wide pressure-sensitive tape conforming to PPP-T-76, extended over all corners and edges at least 3 inches.

5.1.2 *Level B.* The blades shall be preserved and packaged as specified in 5.1.1 except the boxes shall be class (domestic), style OPF conforming to PPP-B-636 and waterproof sealing with tape shall not be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5.1.3 *Level C.* Preservation and packaging of the blades shall be in accordance with the manufacturer's commercial practice. Packaged quantities shall be as specified (see 6.2).

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Blades, preserved and packaged in accordance with level A or C, as specified (see 6.2), shall be packed in overseas type, cleated plywood or nailed wood boxes conforming to PPP-B-601 (class 2), or PPP-B-621. Wood-type shipping containers, other than those containing unit IA packages or unit containers conforming to PPP-B-636, shall be provided with a sealed waterproof case liner conforming to MIL-L-10547. The gross weight of wood and wood-type shipping containers shall not exceed 200 pounds.

5.2.2 *Level B.* Blades, preserved and packaged in accordance with level A or C as specified (see 6.2), shall be packed in domestic type wood-cleated fiberboard, wood-cleated plywood, nailed wood, wirebound wood boxes or overseas type corrugated or solid fiberboard boxes conforming to PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-585, or PPP-B-636 (class 2), respectively. The gross weight of wood boxes and wood-cleated fiberboard boxes shall not exceed approximately 200 pounds; the gross weight of fiberboard boxes shall not exceed the weight limitations of the applicable specification.

5.2.3 *Level C.* Blades, preserved and packaged in accordance with level A or C, as specified (see 6.2), shall be packed in a manner to insure carrier acceptance and safe delivery at destination.

5.3 Marking.

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order (see 6.2), marking for shipment shall be in accordance with MIL-STD-129.

5.3.2 *Civil agencies.* In addition to any special marking specified in the contract or order (see 6.2), marking for shipment shall be in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. This specification covers circular saw blades for portable bench-mounted and floor-mounted woodcutting machines, and motor-driven portable tools.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and class required (see 1.2).

(*c*) Diameter of arbor hole required (see 3.5). If other than round, furnish detailed requirements.

(*d*) Angular velocity for tensioning, if other than 10,000 s.f.m. (see 3.9).

(*e*) Diameter, thickness, and number of teeth or teeth sections required (see applicable table).

(*f*) Style of teeth required for type I, class 1, 30 inches and larger in diameter; and type III, class 1 (see 3.10.1 and 3.12.1).

(*g*) When blades of the types and classes included herein are required in sizes or number of teeth not listed in the applicable tables, exceptions should be specified.

(*h*) The number of each thickness of filler blade required in dado head (see 3.13).

(*i*) Whether examination for cracks and imperfections shall be performed other than in accordance with MIL-I-6868 (see 4.3.1).

(*j*) Whether preservation and packaging should be level A, B, or C, and whether packing should be level A, B, or C, (see 5.1 and 5.2).

(*k*) Quantity per package (see 5.1.1.1 and 5.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

(*l*) When vapor-phase inhibitor shall be used (see 5.1.1.1.1.1).

(*m*) When blades shall be unit protected in accordance with method IB-1 of MIL-P-116 (see 5.1.1.1.1.2).

(*n*) Chrome plated blades, if required (see 3.8).

(*o*) Special marking, if required (see 5.3).

6.3 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:

Circular saw blades.
Carload minimum weight 30,000 pounds.

Motor:

Circular saw blades.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY CUSTODIANS:

Army—MO

Navy—Ships

Air Force—WRA

Preparing activity:

Navy—Ships

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.