GGG-C-414a
April 27, 1965
SUPERSEDING
Int. Fed. Spec. GGG-C-00414 (GSA-FSS)
July 8, 1964

FEDERAL SPECIFICATION

CLAMP, WIRE SPLICING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of wire splicing clamps used for clamping and twisting wires and clamping connectors.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE SPECFICATIONS AND STANDARDS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging Of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustration. The illustration shown herein is descriptive and not restrictive and is included for the convenience of requisitioning and purchasing officers and manufacturers, and is not intended to preclude the purchase of wire splicing clamps which are otherwise in accordance with this specification.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.2 **Material.** Splicing clamps shall be of steel, to comply with the requirements specified and shall be of uniform quality, free of injurious defects.

3.3 **Design.** The splicing clamps shall be of the hinge type. Each half of the clamp shall be of one piece consisting of a reversible type jaw, handle and joint section. The halves of the clamp shall be permanently joined together with links and through rivets which act as pivots. A locking device shall be included which, when engaged, shall hold the handles in a closed position in such a manner as to cause the jaws to firmly and securely grip and hold the wires and connectors, and bring the flat surfaces of the jaws together (see 4.4.2).

3.4 **Detail requirements.** The splicing clamps shall be capable of clamping and twisting Nos. 4, 6, 8, 10, and 12 AWG and Nos. 6, 8, 10, 12 and 14 BWG wires using one side of the jaws. The other side of the jaws shall be capable of clamping and twisting Nos. 6, 8, 10, 12, 14, and 17 AWG and Nos. 8, 10, 12, 14, 16 and 19 BWG double tube sleeves and 0.437 x 0.624 guy strand wire. The clamps shall be similar to figure 1, and conform to its dimensions (see 4.4.2).

3.5 **Hardness.** The grooves of the jaws shall have a hardness of 44-50 on the Rockwell "C" scale when tested in accordance with 4.4.1.

3.6 **Handles.** Handles of the clamps shall be shaped to afford a comfortable grip and shall be free from rough edges and sharp corners.

3.7 **Finish.** All surfaces of the clamp shall be free from burrs, cracks, scale, and other detrimental defects.

3.8 **Identification.** The clamps shall be marked in a permanent and legible manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.9 **Workmanship.** Workmanship shall be in accordance with high grade industrial practice.

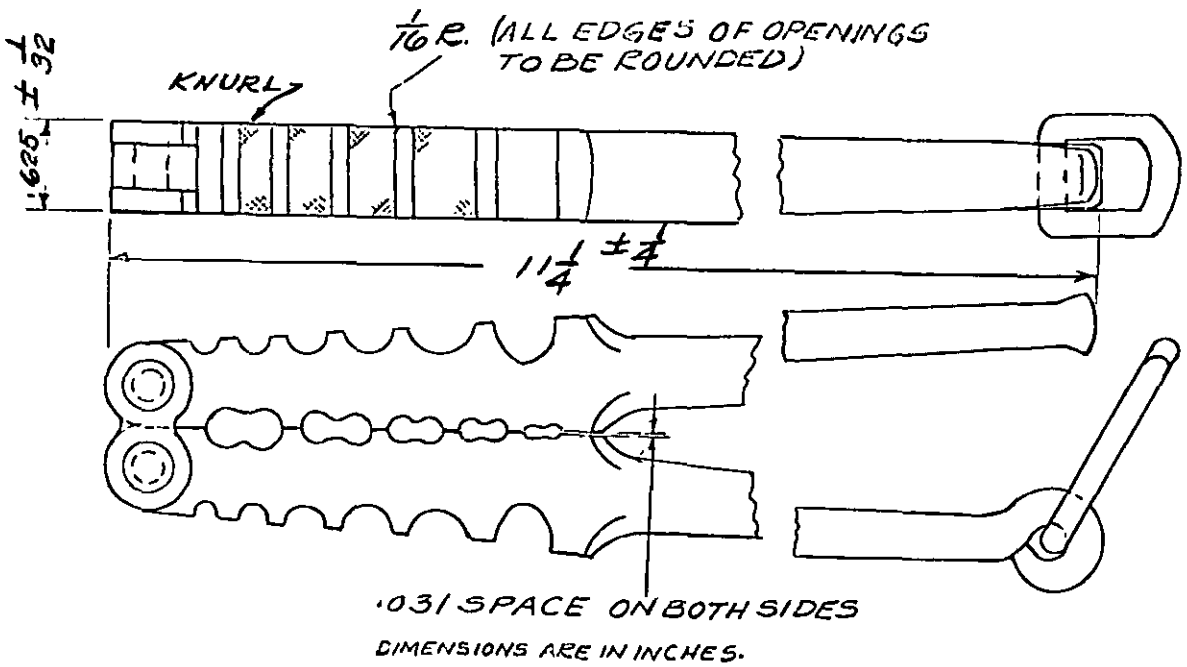


FIGURE 1. Wire splicing clamp

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 ea.	S-4	1.5	Defects per hundred units	4.3.2
Testing	1 ea.	S-3	1.0	Percent defective	4.4
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, construction, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 and 4.4.2.

4.4.1 *Hardness test.* Clamps shall be tested for Rockwell C hardness in accordance with method 243 of Fed. Test Method Std. No. 151.

4.4.2 *Operational test.* Clamps shall be tested to determine compliance with 3.3 and 3.4.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE II. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the clamps shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing A, B, or C, as specified (see 6.1).

5.1.1 As part of the requirements of section 5 of this specification, the columnar information below is considered as part of table I of MIL-H-15424.

5.2 Marking.

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Level of packing and packaging required (see 5.1).

(*c*) Any special marking required (see 5.2).

6.2 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

DOD coordination has been waived.

Preparing Activity:

GSA-FSS

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7
Clamp: Wire splicing	P-2, P-8	I	1	6	8	48

☆ U.S. GOVERNMENT PRINTING OFFICE: 1965—783356/460

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.