GGG-C-415a
June 8, 1965

SUPERSEDING
Int. Fed. Spec. GGG-C-00415 (GSA-FSS)
January 8, 1964

FEDERAL SPECIFICATION

CLAW, TACK

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for one type of tack claw used for pulling tacks, staples, and similar fasteners.

1.1.1 *Federal specification coverage.* Federal specifications do not cover all types and sizes of the commodities indicated by the titles of the specifications, but include only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Type and size.* This specification covers one type and size of tack claw, as hereinafter specified.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

GGG-S-121—Screwdriver and Screw Starter, Hand.
PPP-B-566—Boxes, Folding, Paperboard.
PPP-B-585—Boxes, Wood, Wirebound.
PPP-B-591—Boxes, Fiberboard, Wood-Cleated.
PPP-B-601—Boxes, Wood, Cleated-Plywood.
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636—Box, Fiberboard.
PPP-B-640—Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-665—Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676—Boxes, Set-Up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Hand-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

books and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116—Preservation, Methods of.
MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Steel.* The blade and its shank shall be made of steel. The chemical composition and the heat treatment employed shall be such as to produce tack claws conforming to this specification.

3.1.2 *Wood.* The handles shall be of clear straight-grained, seasoned hardwood except basswood, cottonwood, and poplar.

3.2 Handles. Handles shall be smooth, afford a comfortable handgrip, and shall have a durable coating of lacquer or other equally suitable substance which will preclude the wood from absorbing moisture.

3.3 Ferrules. A substantial metal ferrule shall be fitted to the blade end of the handle. The ferrule shall be pinned, knurled or otherwise mechanically locked in such a manner that it will not become loose or detached in service.

3.4 Blade. The blade shall have a tack pulling claw on one end and a shank on the opposite end. The claw end of the blade shall be hardened and tempered to a Rockwell C scale hardness of not less than 48 nor more than 55. The shank end of the blade shall be provided with ears, lugs or similar means to comply with 3.5. The sides of the claw adjacent to the notch, shall be beveled so as to permit the claw to slip under the tack head. The end of the claw shall terminate in a chisel-shaped configuration.

3.5 Assembly. The tool shall be so assembled that the blade will not turn or loosen in the handle when subjected to a torsional moment of 40 inch-pounds and the tool shall not break or permanently bend when subjected to a bending moment of 350 inch-pounds (see 4.6 and 4.7).

3.6 Plating or polishing. The exposed metal surfaces of the shank shall be either nickel plated in accordance with good commercial practice, or polished.

3.7 Identification marking. Each tack claw shall be stamped or otherwise permanently marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.8 Illustration. Except for dimensional requirements specified, the illustration herein is descriptive and not restrictive and is not intended to preclude the purchase of tack claws otherwise conforming to the requirements of this specification.

3.9 Type and size. The tack claw shall be of the type and size shown in figure 1.

3.10 Workmanship. Workmanship shall be first class in every respect.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection require-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

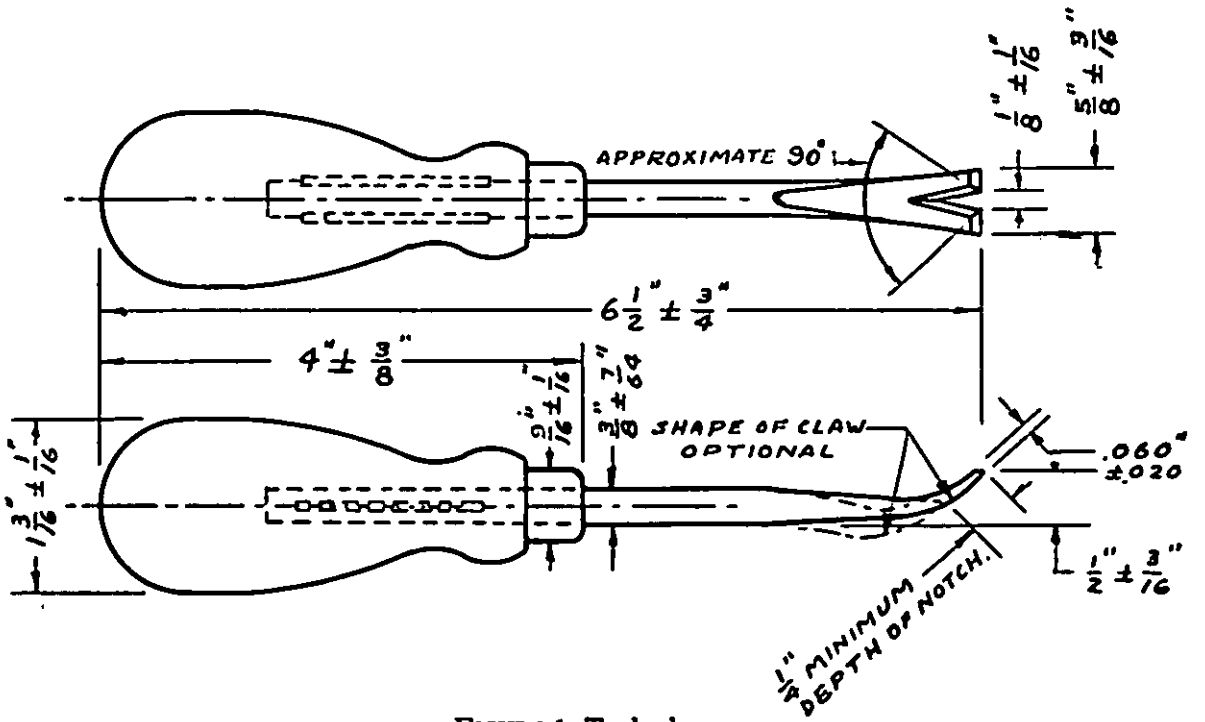


FIGURE 1. Tack claw

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1	II	4.0	Defects per 100 units	4.3.1
Dimensional examination	1	S-4	1.5	Defects per 100 units	4.3.2
Testing	1	S-4	1.0	Percent defective	4.5
Preparation for delivery	One container	S-2	4.0	Defects per 100 units	4.6

ments as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any non-conformance in material, finish, coating, workmanship, and marking. Defects are listed in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE II. *Defects list*

Material	Not as specified (see 3.1)
Finish	Not as specified (see 3.2 and 3.6)
Coating	Not as specified (see 3.2 and 3.6)
Workmanship ..	Not as specified (see 3.10)
Marking	Not as specified (see 3.7)

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements (see fig. 1).

4.4 **Testing.** Each sample unit shall be tested in accordance with 4.5, 4.6, and 4.7.

4.5 **Hardness test.** Hardness tests shall be conducted in accordance with method 243.1 of Fed. Test Method Std. No. 151 to determine compliance with 3.4.

4.6 **Torsional moment test.** The torsional moment test to determine compliance with 3.5 shall be conducted in accordance with the torsional moment test in GGG-S-121 for screwdrivers, except that the working end of the claw tack shall be inserted into a slot of such width and depth as to contact the top and bottom surface of the claw.

4.7 **Bending moment test.** The bending moment test, for claw tacks, to determine compliance with 3.5 shall be conducted in accordance with the bending moment test in GGG-S-121 for screwdrivers.

4.8 **Inspection of preparation for delivery requirements.** An inspection shall be made to determine that the packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE III. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible. improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 **Packaging.** Packaging shall be level A, B, or C as specified (see 6.1).

5.1.1 *Level A.* The claws shall be packaged in quantities of 6 or 12, as specified, (see 6.1) in accordance with method IC-2 of MIL-P-116.

5.1.2 *Level B.* The claws shall be packaged in quantities of 6 or 12 as specified (see 6.1) in a close-fitting box conforming to PPP-B-566, PPP-B-665 or PPP-B-676.

5.1.3 *Level C.* The claws shall be packaged in accordance with the supplier's commercial practice.

5.2 **Packing.** Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 *Level A.* The unit packages of claws shall be packed in close-fitting boxes conforming to PPP-B-585, class 3; PPP-B-591, class II; PPP-B-601, type III; PPP-B-621, class 2; PPP-B-636, class weather-resistant; or PPP-B-640, class 2, grade A. The boxes shall be closed and strapped in accordance with the applicable specification or appendix thereto. The gross weight of the triple

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

wall fiberboard box and the wood boxes shall not exceed approximately 200 pounds. The gross weight of the PPP-B-636 fiberboard box shall not exceed the weight limitations of the box specification.

5.2.2 *Level B.* The unit packages of claws shall be packed in quantities, as specified, (see 6.1) in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification. The gross weight shall not exceed the weight limitations of the box specification.

5.2.3 *Level C.* The claws shall be packed to insure carrier acceptance and safe delivery at destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military activities.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Level of packaging and packing required (see 5.1 and 5.2).

(*c*) For levels A and B, state the quantity per package, and packing (see 5.1.1, 5.1.2, and 5.2.2).

(*d*) Marking requirements (see 5.3.1 and 5.3.2).

6.2 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, other than power. *Truckload minimum* weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

DOD coordination has been waived.

Preparing activity

GSA-FSS

☆ U.S. GOVERNMENT PRINTING OFFICE: 1969—783387/818

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.