INTERIM FEDERAL SPECIFICATION

FISHING TOOL, PNEUMATIC TIRE VALVE

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. - This specification covers a pneumatic tire valve fishing tool consisting of a chain having a cross handle at one end and a swivel fitting at the other end. The fitting is attached to the tire valve and the handle and chain are used to bring the fitting and valve through the rim hole, and hold the valve stem in position while the tire is being inflated.

1.1.1 Federal specification coverage. - Federal specifications do not cover all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification. - This specification covers but one type and size of pneumatic tire valve tool as hereinafter specified.

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1 Specifications and standards. - The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specification:
RR-C-271 - Chains and Attachments, Welded, Weldless, and Roller Chain.

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE.

Military Specification:
MIL-H-15424 - Hand Tools Packaging of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Marking. - Each valve fishing tool shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.2 Illustration. - The illustration shown herein is for the purpose of identification and is not intended to preclude the purchase of valve fishing tools which are otherwise in accordance with the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.3 Finish. - All ferrous metal parts shall be plated with one of the following: cadmium, bright zinc, nickel, or nickel and chromium.

3.4 Design and construction. - The pneumatic tire valve fishing tool (figure 1) shall consist of a chain or cable with a cross handle on one end and a swivel fitting on the opposite end. The tool shall be designed to screw onto the tire valve stem and by pulling the handle, the chain and fitting shall bring the valve stem through the rim hole and hold the valve stem in position while the tire is being inflated.

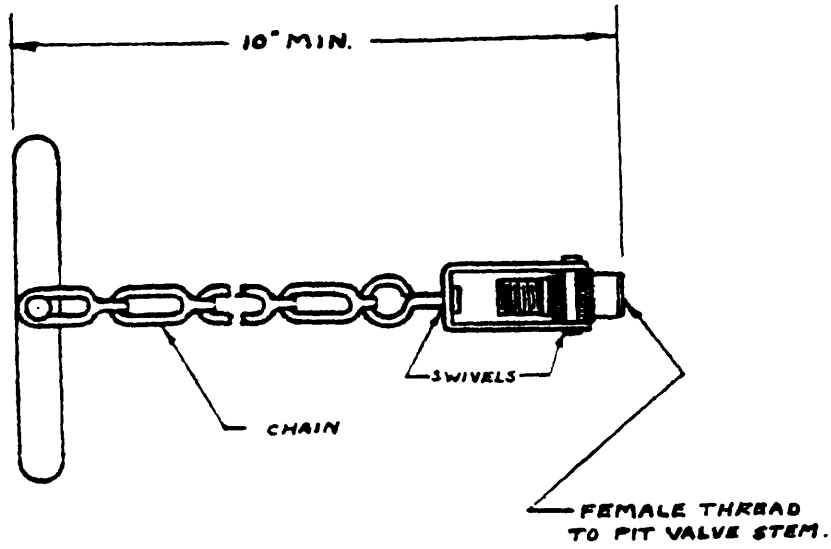


Figure 1. - Fishing tool, pneumatic tire valve.

3.4.1 Chain or cable. - The chain shall be in accordance with type II, class 6 (trade No. 1) of Federal Specification RR-C-271, or a metal chain or flexible metal cable of equal or greater strength will be acceptable.

3.4.2 Cross handle. - The cross handle shall be of metal at least 0.090 inch thick, by at least 5/16-inch in width, and at least 2-1/2 inches in length. All corners shall be rounded or deburred to provide a smooth handgrip.

3.4.3 Swivel fitting. - The swivel fitting shall be made of metal. The swivel fitting shall consist essentially of the following: One u-shaped yoke with a swiveling eye (connected to the chain), and a fitting made of brass or other metal of suitable strength and soft enough not to damage the valve stem threads. One end of the fitting shall have internal threads of such diameter and form as to fit the external threads on standard type valve stems. The opposite end of the fitting shall have external threads identical with the cap threads on the exterior of standard type valve stems. The male and female thread fitting shall be secured in a manner to permit swiveling 360 degrees within the yoke. Provision shall be made for the activation of the tire valve when the air chuck is applied.

3.5 Size and test requirements. - The entire assembly below the cross handle shall be of such size as to pass through a .518-inch hole in a 1/8-inch steel plate. The entire assembly shall withstand a pull of 50 pounds (see 4.4.1).

3.6 Workmanship. - Workmanship shall be first class in every respect.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and service acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for acceptance inspection.

4.2.1 Inspection lot. - All tools of the same type, and size offered for delivery at one time shall be considered a lot for purposes of sampling and tests.

4.2.2 Sampling for visual and dimensional examination. - A random sample of tools shall be selected from each inspection lot of material offered for examination of visual and dimensional characteristics with lot acceptance based on the sampling inspection requirements in accordance with Military Standard MIL-STD-105. The inspection level shall be level II, with AQL of 1.5 percent defective.

4.2.3 Sampling for tests. - A random sample of tools shall be selected from each inspection lot in accordance with Military Standard MIL-STD-105 at inspection level S4 and shall be subjected to the test specified in 4.4.1. The Acceptable Quality Level shall be equal to 4.0 percent defective.

4.3 Examination. - Each of the sample tools selected in accordance with 4.2.2 shall be examined to verify compliance with this specification. Examinations shall be conducted as specified in table I. Any tool in the sample that fails to pass the examination of 4.3 or the test of 4.4.1 shall be rejected, and if the number of defective tools in any sample exceeds the acceptance number the lot shall be rejected.

Table I. - Classification of defects.

Categories	Defects
Critical:	None defined
Major	
101	Type and size not as specified (see 1.2).
102	Design and construction not as specified (see 3.4).
103	Chain not as specified (see 3.4.1).
104	Cross handle not as specified (see 3.4.2).
105	Swivel fitting not as specified (see 3.4.3).
Minor	
201	Marking not as specified (see 3.1).
202	Finish not as specified (see 3.3).
203	Workmanship not first class (see 3.6)

4.4 Test procedures.

4.4.1 Physical tests. - Procure a steel plate 1/8-inch in thickness, with a .618-inch diameter hole. Slip the swivel fitting and chain through the hole up to the cross handle. If the swivel fitting and chain do not pass through the .618-inch hole, the tool shall be considered defective. Screw the female thread of the swivel fitting onto the male thread on the valve stem of a commercial pneumatic tire (or onto a metal test piece having the same male thread), then using a spring balance apply a load of 50 pounds for 15 seconds in a manner to test the complete assembly. If any joint or portion of the tool breaks or becomes permanently deformed, the tool shall be considered defective.

4.5 Inspection of preparation for delivery. - Unless otherwise specified, inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-H-15424, for craftsman's tweezers.

5. PREPARATION FOR DELIVERY

(Civil agencies. - Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Preservation and packaging. - Packaging of valve fishing tools is not covered by MIL-H-15424, however, packaging shall be the same as specified for craftsman's tweezers.

5.1.1 Level A. - Level A cleaning, preservation and packaging shall be in accordance with level A of Military Specification MIL-H-15424 for craftsman's tweezers.

5.1.2 Level C. - Level C cleaning, preservation and packaging shall be in accordance with the contractor's commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5.2 Packing.

5.2.1 Level A. - Level A packing shall be in accordance with level A of Military Specification MIL-H-15424, for craftsman's tweezers.

5.2.2 Level B. - Level B packing shall be in accordance with level B of Military Specification MIL-H-15424, for craftsman's tweezers.

5.2.3 Level C. - Valve fishing tools cleaned, preserved and packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with the rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. - In addition to any special marking specified in the contract or order, each unit and intermediate package and shipping container shall be marked in accordance with Federal Standard No. 123.

5.3.2 Military agencies. - Interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of preservation, packaging and packing required (see section 5).
(c) Special marking, if required (see 5.3).

6.2 Illustration. - The illustration shown herein is for the purpose of identification and is not intended to preclude the purchase of valve fishing tools which are otherwise in accordance with the requirements of this specification.

Notice. - SEE LAST PAGE.

GSA WASH DC 44-8095

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

ADDENDUM

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-4279

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

GE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

GENERAL SERVICES ADMINISTRATION
FEDERAL SUPPLY SERVICE
PROGRAM DEVELOPMENT BRANCH
ROOM 4921, REGIONAL OFFICE
7TH STREET (S.W.)
WASHINGTON, D.C.

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.