[INCH-POUND]
GGG-S-326E
August 14, 1996
SUPERSEDING
GGG-S-326D
November 1, 1963

FEDERAL SPECIFICATION

SHOVELS, SCOOPS, SPADES, SNOW PUSHERS, AND TELEGRAPH SPOONS

The General Services Administration has authorized the use of this Federal Specification by all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand shovels, scoops, spades, snow pushers, and telegraph spoons for general use in handling loose and bulky materials such as dirt, sand, gravel, grain, snow, and so forth, as applicable.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. The shovels, scoops, spades, snow pushers, and telegraph spoons shall be of the following types, classes, and styles, as specified (see 6.2):

Type I - Scoop, break-down

Type II - Scoop, eastern pattern

Type III - Scoop, sand and gravel

Type IV - Shovel, round point
- Class A - D-handle
  - Style 1 - Open back
  - Style 2 - Closed back
  - Style 3 - Solid shank
  - Style 4 - Plain back
- Class B - Long handle
  - Style 1 - Open back
  - Style 2 - Closed back
  - Style 3 - Solid shank
  - Style 4 - Plain back

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center (6FETE-CO), Washington, DC 20406.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Type V - Shovel, square point
Class A - D-handle
Style 1 - Open back
Style 2 - Closed back
Style 3 - Solid shank
Style 4 - Plain back
Class B - Long handle
Style 1 - Open back
Style 2 - Closed back
Style 3 - Solid shank
Style 4 - Plain back

Type VI - Shovel, molders'
Style 1 - Open back
Style 2 - Closed back
Style 3 - Solid shank
Style 4 - Plain back

Type VII - Shovel, snow or barn (general purpose)
Class A - D-handle
Class B - Long handle

Type VIII - Shovel, telegraph
Class A - Straight handle
Class B - Bent handle

Type IX - Spade, ditch or post
Style 1 - Closed back
Style 2 - Solid shank
Style 3 - Plain back

Type X - Spade, drain
Style 1 - Closed back
Style 2 - Solid shank
Style 3 - Plain back

Type XI - Spade, garden
Class A - D-handle
Style 1 - Open back
Style 2 - Closed back
Style 3 - Solid shank
Style 4 - Plain back
Class B - Long handle
Style 1 - Open back
Style 2 - Closed back
Style 3 - Solid shank
Style 4 - Plain back

Type XII - Spoon, telegraph, eastern pattern

Type XIV - Shovel, snow, D-handle
Class A - Light weight
Class B - Medium weight

Type XV - Pusher, snow, long handle
Class A - Light weight
Class B - Medium weight

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

NN-H-81	-	Handles, Ash, for Tools
NN-H-93	-	Handles; Hickory, Striking Tool
PPP-P-40	-	Preservation and Packing of Hand Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery

Federal Standards:

FED-STD-48	-	Tolerances for Steel and Iron Wrought Products

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under *General Information* in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standards Institute (ANSI)/American Society of Quality Control (ASQC):

ANSI/ASQC Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.)

American Society for Testing and Materials (ASTM):

ASTM E 18	-	Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials

(Applications for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of shovels otherwise conforming to this specification.

3.2 Construction.

3.2.1 Open back. The open back shall be constructed in such a manner that the socket for the handle is integral with the blade. The center portion of the blade at the shoulder end shall be arched to form a frog with an open or hollow recess in the back. The shoulder shall curve away from the socket and smoothly blend with the curvatures of the blade. For securing the assembled handle, the socket shall have either one or two through holes to accommodate rivet(s) not smaller in diameter than No. 6 size.

3.2.1.1 Sockets. The sockets for types IV, V, and XI open back shall be 9 inches long (± 1/4 inch) and shall be closed for a length of 7 inches (± 1/4 inch) measured from the top of the socket. The socket shall be deemed to be closed when the seam opening of the socket does not exceed 3/16 inch. The taper of the socket shall be such as to provide a good fit for replacement handles specified in 3.5.3.

3.2.2 Closed back. The closed back shall conform to the requirements specified in 3.2.1 except that the back of the blade shall be supplemented by a steel plate welded over the open or hollow recess. The steel plate shall be welded in such a manner as to produce a smooth surface on the back of the blade. For securing the assembled handle, the socket shall have either one or two through holes to accommodate rivet(s) not smaller in diameter than No. 6 size.

3.2.3 Solid shank. The solid shank shall be forged rolled and formed from one piece of steel in order that the blade, shank, and socket will be integral. The shank and the center or thickest portion of the blade at the shoulder end shall be formed to provide a frog. The socket shall have a straight inside taper of sufficient depth to properly receive the handle.


3.2.4 Plain back. The plain back shall have two straps either of separate pieces of steel seam-welded to the blade, or the front strap being an integral part of the blade and the back strap preformed and welded to the back of the blade. The front and back straps shall be opened forming a uniform frog into which the socket end of the handle is inserted. The straps shall have no less than two holes to accommodate No. 4 rivets for securing the handle when assembled.

3.3 Method of measuring. The dimensions as specified in Tables II through XVII shall be measured as illustrated in Figure 1.

3.4 Blades. The blades and other metal parts shall be high-grade steel, of uniform quality, and free from hard spots. The blades of all tools except types XIV and XV shall be properly heat treated to provide tools capable of long life under ordinary service conditions and withstanding the tests specified in section 4. The dimensions of the blade shall conform to the applicable tables hereinafter specified. All exposed metal edges shall be smooth except the cutting edge of the blade which shall be sharpened or beveled in accordance with good commercial practice. The cutting edge of round-point shovels shall be considered as the bottom curved half of the blade.

3.4.1 Blade thickness. The blade thickness shall be measured at no less than three different points on the blade. The small circles as illustrated in Figure 1 shall indicate approximately where the thickness of the blade is to be measured. The measurement of the thickness and crown shall be within the tolerances established in paragraphs 11A3, 14A1, and 14A2 of FED-STD-48. The steel gage numbers referenced throughout this specification are of the manufacturers' standard gage for steel.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:39Z
Check the source to verify that this is the currentversion before use.

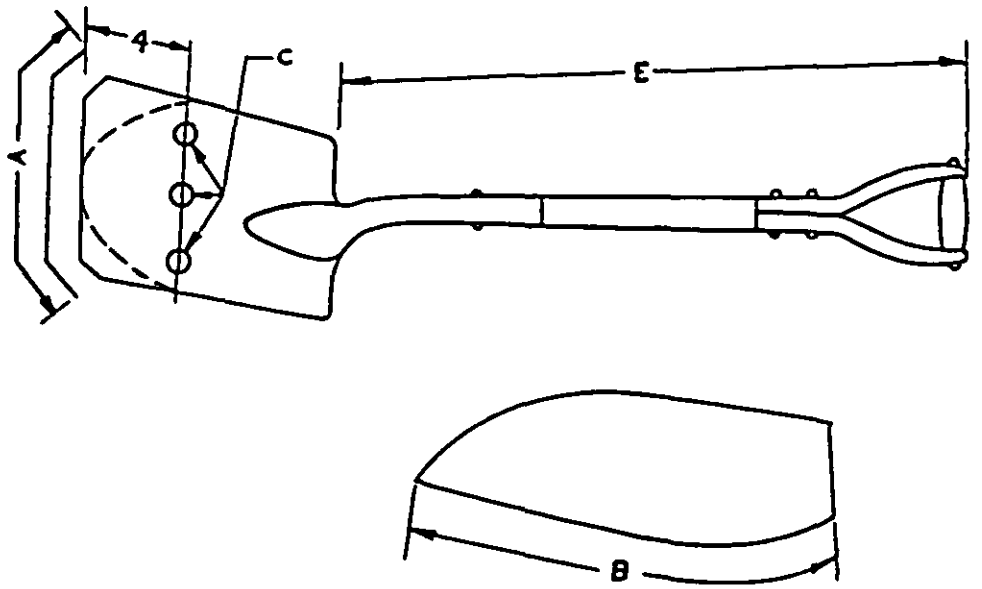

A Blade width is the largest measurement obtained following the curvature of the blade.
B Blade length.
C Blade thickness.
D Strap or socket length.
E Handle length from shoulder of blade to end of handle.
F Handle lift.

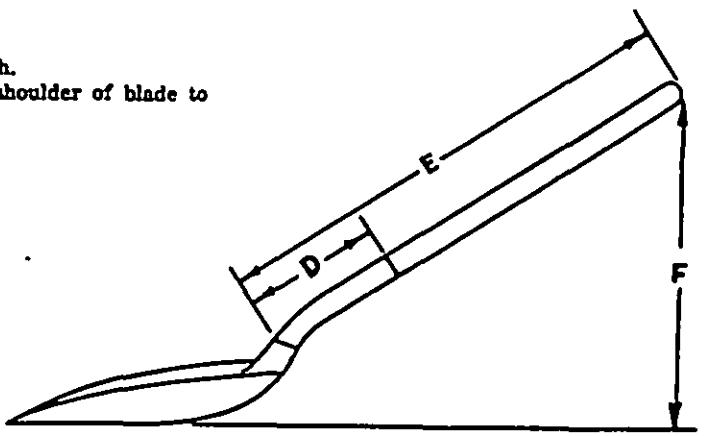


Figure 1. Method of measuring.

3.4.2 Blade hardness. The full length of all blades, except for types XIV and XV, shall possess a hardness of 38 to 47 on the Rockwell C scale as specified in ASTM E18. In addition, 4 inches of the blade socket measured from the blade shoulder shall also be hardened the same as the blades except that sockets for plain back tools and types XIV and XV snow tools need not be hardened.

3.4.3 Metal finish of blade. The blade and other metal parts shall be substantially free from burrs, cracks, or other detrimental defects. Except for types XIV and XV, the edges of rivet heads shall be flush with the surface. All radii and contours shall be blended and smoothly finished in accordance with good commercial practice.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.5 Handles. The handles shall be of seasoned SA or SB (except the maximum permissible cross grain shall meet the SA requirement) grade ash conforming to the requirements of NN-H-81 except that, at the option of the manufacturer, hickory in accordance with NN-H-93 may be used in lieu of ash for type VIII telegraph shovels and type XII telegraph spoons.

3.5.1 D-handles. The D-handle shall be tubular steel or plastic at the manufacturer's option and shall meet the applicable requirements specified herein.

3.5.1.1 D-handles, steel, tubular. The D-handles shall be a steel tubular dee with a wood grip or spool. The wood handgrip shall be riveted to the sides of the dee and secured either by staking or clip locks to prevent the handgrip from becoming loose or turning. The steel tubular dee shall be secured to the wood handle with not less than two rivets or one screw 5/8 inch long driven halfway through the wood handle, or four barbed nails. One rivet or screw will suffice where the wood prongs of the handle extend into the steel tubes of the dee. The D-handle shall be in conformance with 3.5, and shall conform to the dimensions of Figure 2.

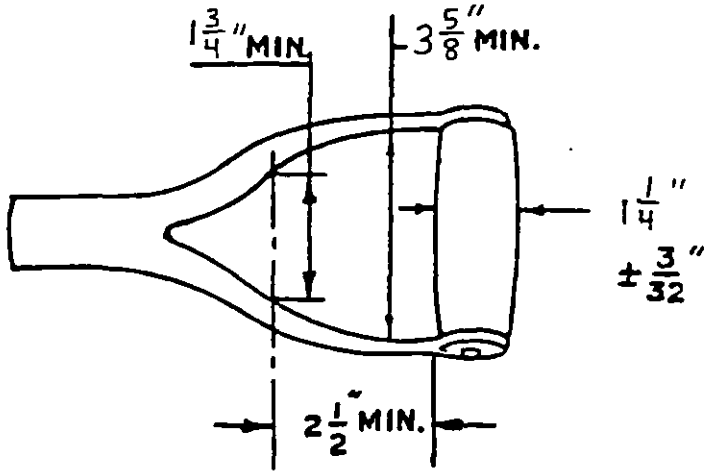


Figure 2. Dimensions for D-handles.

3.5.1.2 D-handles, plastic. For use on type XIV snow shovels only. The D-handle shall be of molded construction. The handle shall be 3-5/8 inches minimum at the wide part of the fork in the D-handle. The minimum width of the hand grip shall be 1-9/32 inches, ± 1/16 inch. The socket shall have two nailing bosses located on either the sides or on the front and back for adequate holding power between grip and stem and to provide adequate torsional loading capability. The plastic material shall have good resistance to chemical attack, low notch sensitivity and good impact strengths, and shall not fail when subjected to tests outlined in 4.4.2.3.1 and 4.4.2.3.2. The plastic D grip shall conform to the minimum dimensions established in Figure 2.

3.5.2 Long handles. All long handles except those for telegraph shovels, telegraph spoons, and snow pushers shall conform to the dimensions of Table I.

TABLE I. Dimensions for long handles (except telegraph shovels, telegraph spoons, and snow pushers)

Diameter adjacent to straps or sockets		Smallest diameter adjacent to top of knob end		Diameter of knob end	
Minimum (Inches)	Maximum (Inches)	Minimum (Inch)	Maximum (Inches)	Minimum (Inches)	Maximum (Inches)
1-7/16	1-9/16 (± 1/32 inch to diameter of knob end of handle)	1	1-1/8	1-3/8	1-9/16

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.5.3 Replacement handles. Replacement handles for type IV, classes A and B, style 1; type V, classes A and B, style 1; and type XI, classes A and B, style 1, open-back shovels and garden spades shall be in accordance with 3.5. The chuck end of the handle shall have a straight tapered section provided with a shoulder in order that the outside diameter of the blade socket will be approximately flush with the handle when assembled. The tapered end of the handle shall be slotted to allow the taper portion to take the shape of the socket. The slot shall be at right angles to the grain, not offset more than 1/16 inch from the axial center line of the handle. Two oval-head rivets being of sufficient lengths for securing the handle to the socket shall be furnished with each replacement handle. The rivets shall be fastened to the handles in a manner to preclude their being lost during shipment. Dimensions of the taper section of replacement handles shall conform to Figure 3.

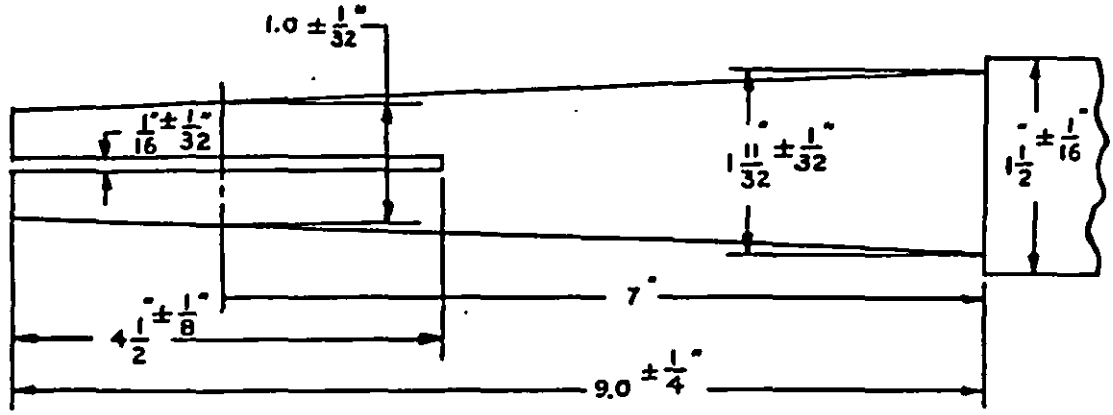


Figure 3. Dimensions for taper section of replacement handles.

3.5.4 Handle coating. All portions of the handles shall be smoothly finished and shall be adequately covered with two durable coats of transparent lacquer or varnish or one coat after surface treatment utilizing heat such as flame treating or charring. The coating shall be applied in a manner to permit visual inspection of the wood and to prevent absorption of water. The wood grip of steel tubular D-handles may be coated with pigmented lacquer. Handles having one coat of water base Latex Emulsion shall be acceptable.

3.6 Marking. Each item shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture. The marking shall be engraved, etched, or stamped in such a manner that it will be permanent to the extent that it will remain clear and legible throughout the life of the item.

3.7 Type I scoop, break-down. Type I, break-down scoops shall be of an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1.

3.7.1 Blade. The blade shall be diamond point and shall conform to 3.4. The shoulder edges shall be turned approximately 90° to form a step.

3.7.2 Type I scoops. Type I scoops shall conform to Table II and shall be similar to Figure 4.

TABLE II. Dimensions for type I scoop, break-down

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
5	11-1/2	12	15-1/2	16-1/2	0.0673	7	26	28	17	21	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

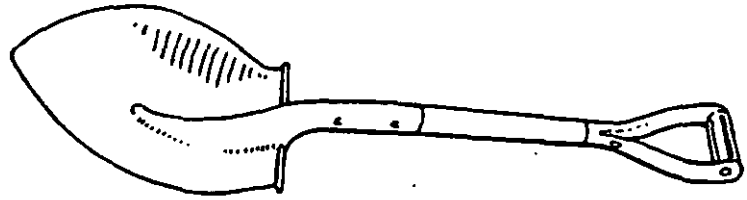


Figure 4. Type I scoop, break-down.

3.8 Type II scoop, eastern pattern. Type II scoops shall be an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1. Type II scoops shall conform to Table III and shall be similar to Figure 5.

TABLE III. Dimensions for type II scoop, eastern pattern

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	12	12-1/2	14-3/4	15-3/4	0.0598	7	26	28	17	21	16
4	12-1/4	13	15-3/4	17-1/4	0.0598	7	26	28	17	21	16
6	13	13-1/2	17-1/4	18-1/4	0.0598	7	26	28	17	21	16

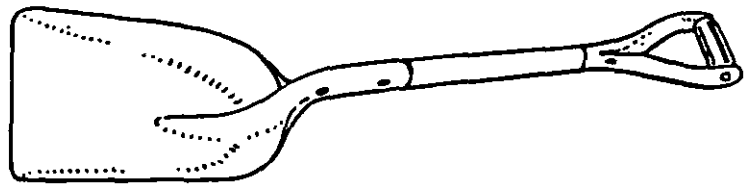


Figure 5. Type II scoop, eastern pattern.

3.8.1 Blade. The blade shall be square point and shall conform to 3.4.

3.9 Type III scoop, sand and gravel. Type III sand and gravel scoops shall be an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1.

3.9.1 Blade. The blade shall be round point in accordance with 3.4. The shoulder edges of the blade shall be turned to approximately 90° to form a step.

3.9.2 Type III scoop. The type III scoop, sand and gravel, shall conform to Table IV and shall be similar to Figure 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE IV. Dimensions for type III scoop, sand and gravel

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	12-1/4	12-3/4	14-3/4	15-3/4	0.0598	7	26	28	17	21	16

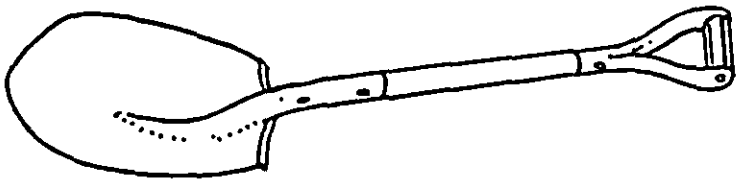


Figure 6. Type III scoop, sand and gravel.

3.10 Type IV shovel, round point.

3.10.1 Blades. The blades for type IV shovels shall conform to the requirements of 3.4

3.10.2 Class A, D-handles. Class A shovels shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of Table V.

TABLE V. Type IV, class A shovel, round point, D-handle, styles 1, 2, 3, and 4

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	9-1/2	10-1/4	11-1/2	12-1/2	0.0747	8-3/4	26	28	17	21	14

3.10.2.1 Style 1, open back. Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to Figure 7. The shoulder edges of the blade shall be rolled to form a noncutting step.

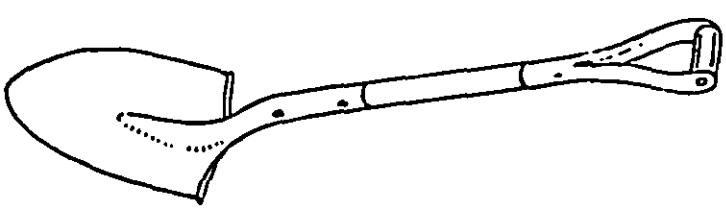


Figure 7. Type IV, class A, style 1, round point, D-handle, open back.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.10.2.1.1 Replacement handles. Replacement handles for the style 1 shovel shall conform to the requirements of 3.5.1 and 3.5.3.

3.10.2.2 Style 2, closed back. Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 8. The shoulder edge of the blade shall be rolled to form a noncutting step.

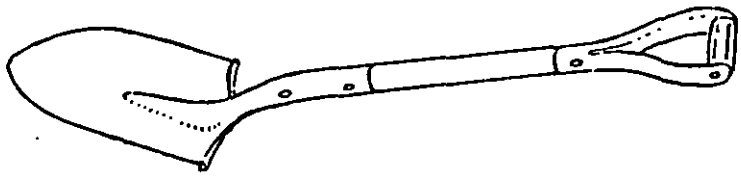


Figure 8. Type IV, class A, style 2, round point, D-handle, closed back.

3.10.2.3 Style 3, solid shank. Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 9.

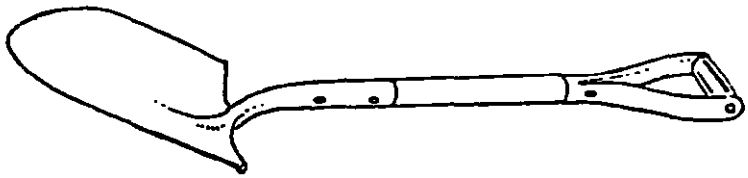


Figure 9. Type IV, class A, style 3, round point, D-handle, solid shank.

3.10.2.4 Style 4, plain back. Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 10.

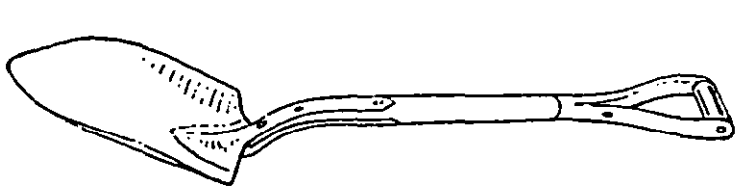


Figure 10. Type IV, class A, style 4, round point, D-handle, plain back.

3.10.3 Class B, long handles. Class B shovels shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of Table VI.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the currentversion before use.

TABLE VI. Type IV, class B, shovel, round point, long handle, styles 1, 2, 3, and 4

Size No.	Blade					Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
0	7-3/4	8-1/4	9-1/2	10-1/2	0.0747	8	36-1/2	40-1/2	27	31	14
2	9-1/2	10-1/4	11-1/2	12-1/2	0.0747	8-3/4	46	52	29	33	14
4	10-1/4	11-1/8	12-3/8	14	0.0747	8-3/4	46	52	27	33	14

3.10.3.1 Style 1, open back. Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to Figure 11. The shoulder edges of the blade shall be rolled to form a noncutting step.




Figure 11. Type IV, class B, style 1, round point, long handle, open back.

3.10.3.1.1 Replacement handles. Replacement handles for class B, style 1 shovels shall conform to the requirements of 3.5.2 and 3.5.3.

3.10.3.2 Style 2, closed back. Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 12. The shoulder edge of the blade shall be rolled to form a noncutting step.




Figure 12. Type IV, class B, style 2, round point, long handle, closed back.

3.10.3.3 Style 3, solid shank. Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 13.




Figure 13. Type IV, class B, style 3, round point, long handle, solid shank

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the currentversion before use.

3.10.3.4 Style 4, plain back. Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 14.




Figure 14. Type IV, class B, style 4, round point, long handle, plain back.

3.11 Type V shovel, square point.

3.11.1 Blades. The blades for type V shovels shall conform to the requirements of 3.4.

3.11.2 Class A, D-handle. Class A shovels shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of Table VII.

TABLE VII. Type V, class A, shovel; square point, D-handle, styles 1, 2, 3, and 4

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	9-1/2	10-1/4	11-1/2	12-1/2	0.0747	8-3/4	26	28	17	21	14
4	10-1/2	11-1/4	12-3/8	13-3/4	0.0747	8-3/4	26	28	17	21	14

3.11.2.1 Style 1, open back. Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to Figure 15. The shoulder edges of the blade shall be rolled to form a noncutting step.

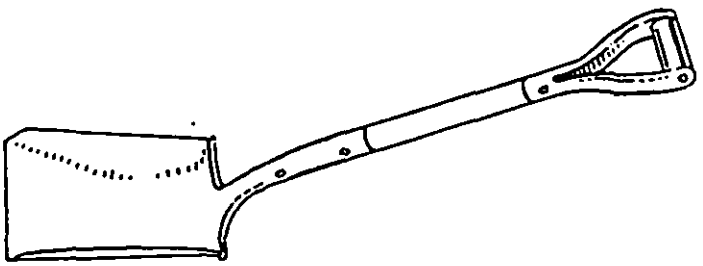


Figure 15. Type V, class A, style 1, square point, D-handle, open back.

3.11.2.1.1 Replacement handles. Replacement handles for style 1 shovels shall conform to the requirements of 3.5.1 and 3.5.3.

3.11.2.2 Style 2, closed back. Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 16. The shoulder edges of the blade shall be rolled to form a noncutting step.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

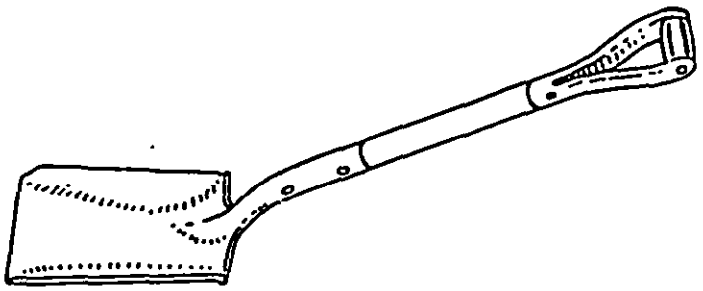


Figure 16. Type V, class A, style 2, square point, D-handle, closed back.

3.11.2.3 Style 3, solid shank. Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 17.

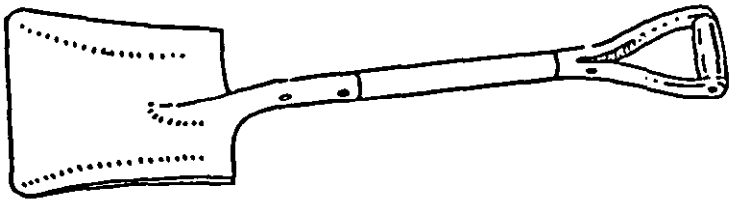


Figure 17. Type V, class A, style 3, square point, D-handle, solid shank.

3.11.2.4 Style 4, plain back. Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 18.

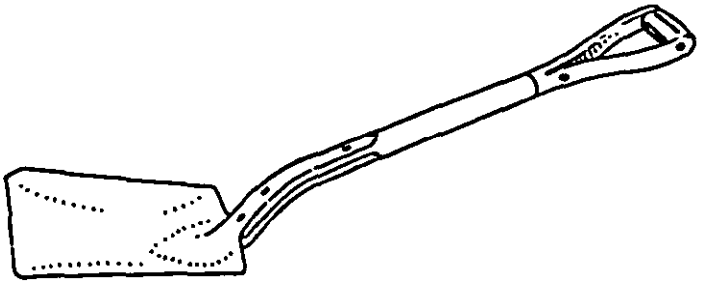


Figure 18. Type V, class A, style 4, square point, D-handle, plain back.

3.11.3 Class B, long handles. Class B shovels shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of Table VIII.

TABLE VIII. Type V, class B, shovel, square point, long handle, styles 1, 2, 3, and 4

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket or strap D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inches)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	9-1/2	10-1/4	11-1/2	12-1/2	0.0747	8-3/4	46	52	28	33	14

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.11.3.1 Style 1, open back. Style 1 open back shall be in accordance with the requirements of 3.2.1 and shall be similar to Figure 19. The shoulder edges of the blade shall be rolled to form a noncutting step.




Figure 19. Type V, class B, style 1, square point, long handle, open back.

3.11.3.1.1 Replacement handles. Replacement handles for style 1 shovels shall conform to the requirements of 3.5.2 and 3.5.3.

3.11.3.2 Style 2, closed back. Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 20. The shoulder edges of the blade shall be rolled to form a noncutting step.




Figure 20. Type V, class B, style 2, square point, long handle, closed back.

3.11.3.3 Style 3, solid shank. Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 21.




Figure 21. Type V, class B, style 3, square point, long handle, solid shank.

3.11.3.4 Style 4, plain back. Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 22.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.




Figure 22. Type V, class B, style 4, square point, long handle, plain back.

3.12 Type VI shovel, molders'.

3.12.1 Blade. The blades shall conform to the requirements of 3.4.

3.12.2 Handle. The handles shall be in accordance with 3.5.1.

3.12.3 Type VI, molders'. Type VI molders' shovels shall conform to the dimensions of Table IX.

TABLE IX. Type VI, molders' shovels, styles 1, 2, 3, and 4

Size No.	Blade					Length of socket or strap D Min (Inches)	Handle				Gage of steel
	Width A		Length B		Thickness C Nominal (Inch)		Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)			Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	9-1/2	10-1/4	11-3/8	12-1/2	0.0673	8	26	28	17	21	15

3.12.4 Style 1, open back. Style 1 shovels shall be in accordance wit the requirements of 3.2.1 and shall be similar to Figure 23.

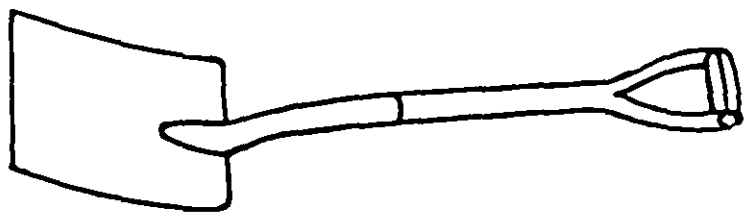


Figure 23. Type VI, style 1, shovel, molders', open back.

3.12.5 Style 2, closed back. Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 24.

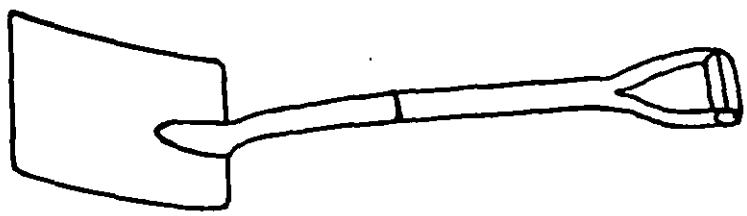


Figure 24. Type VI, style 2, shovel, molders', closed back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.12.6 Style 3, solid shank. Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 25.

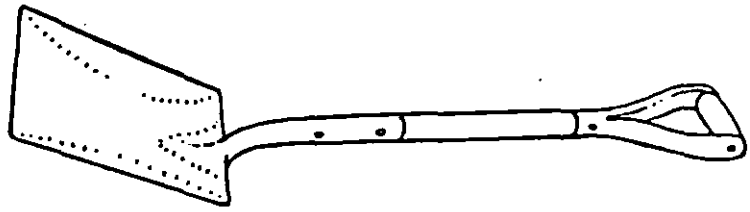


Figure 25. Type VI, style 3, shovel, molders', solid shank.

3.12.7 Style 4, plain back. Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 26.

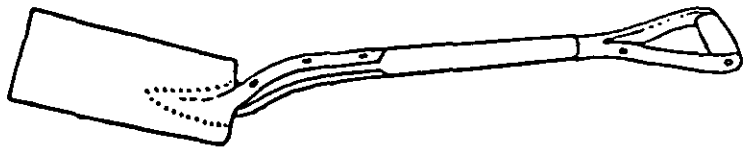


Figure 26. Type VI, style 4, shovel, molders', plain back.

3.13 Type VII shovel, snow or barn (general purpose). Type VII shovels shall be of an open back in accordance with 3.2.1.

3.13.1 Blade. The blades shall conform to the requirements of 3.4.

3.13.2 Class A, D-handle. Class A shovels shall be in accordance with the requirements of 3.5.1, conform to the dimension of Table X, and shall be similar to Figure 27.

TABLE X. Type VII, class A shovel, snow or barn (general purpose), D-handle

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	11-3/4	12-1/4	13-1/2	15	0.0598	5	26	28	17	21	16

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

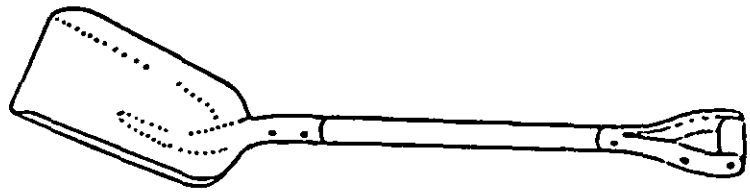


Figure 27. Type VII, class A, shovel, snow or barn (general purpose), D-handle.

3.13.3 Class B, long handle. Class B shovels shall conform to the requirements of 3.5.2, conform to the dimensions shown in Table XI, and shall be similar to Figure 28.

TABLE XI. Type VII, class B, shovel, snow or barn (general purpose), long handle

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	11-3/4	12-1/4	13-1/2	15	0.0598	5	46	52	27	31	16




Figure 28. Type VII, class B, shovel, snow or barn (general purpose), long handle.

3.14 Type VIII shovel, telegraph.

3.14.1 Blades. The blades for type VIII telegraph shovels shall be plain back and shall conform to the requirements of 3.2.4 and 3.4.

3.14.2 Handles. The handles for type VIII shovels shall conform to the requirements of 3.5. The top side of the handles shall indicate in a plain and permanent manner the gage depth or footage marks. The gage depth or footage mark divisions shall advance from the cutting edge point of the blade and be clearly and permanently numbered to indicate the depth in feet. Marking for the 8-foot handles shall start at 4 feet from the cutting edge point of the blade and advance in increments of 1 foot up to and including the 7-foot mark. The markings for the 10-foot handles shall start at 5 feet from the cutting edge point of the blade and advance in increments of 1 foot up to and including the 9-foot mark. The diameter of the handles adjacent to the straps shall be not less than 1-3/4 inches. The diameter of the handle at the knob end shall be not less than 1-3/8 nor more than 1-1/2 inches.

3.14.3 Type VIII shovels. Type VIII shovels shall conform to the dimensions of Table XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XII. Type VIII shovel, telegraph

Size No.	Blade					Length of strap D	Handle length E		Gage of steel
	Width A		Length B		Thickness C				
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	
2	9-5/8	10-1/4	11-3/8	12-1/2	0.0897	22	93	99	13
2	9-5/8	10-1/4	11-3/8	12-1/2	0.0897	22	117	123	13

3.14.4 Class A, straight handle. Class A shovels shall be similar to Figure 29.



Figure 29. Type VIII, class A, shovel, telegraph, straight handle.

3.14.5 Class B, bent handle. Class B, bent handle shovels shall be similar to Figure 30.

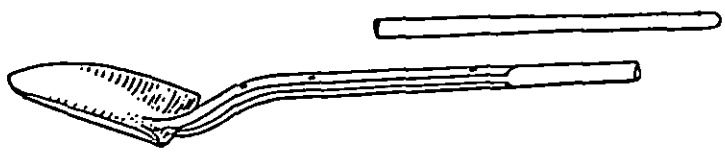


Figure 30. Type VIII, class B, shovel, telegraph, bent handle.

3.15 Type IX spade, ditch or post.

3.15.1 Blade. The blades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a noncutting step.

3.15.2 Handle. The handles shall conform to the requirements of 3.5.1.

3.15.3 Type IX spade. The type IX spade shall conform to the dimensions of Table XIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XIII. Type IX spade, ditch or post, styles 1, 2, and 3

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C		Length of socket D	Length E		Lift F		
	Min (inches)	Max (inches)	Min (inches)	Max (inches)	Min (inch)	Max (inch)	Min (inches)	Min (inches)	Max (inches)	Min (inches)	Max (inches)	
14	6-1/2	7-1/4	13-1/2	14-1/2	0.060	0.085	8	26	29	5	7-1/2	14 or 15
16	6-1/2	7-1/4	15-1/2	16-1/2	0.060	0.085	8	26	29	5	7-1/2	14 or 15

3.15.4 Style 1, closed back. Style 1 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 31.



Figure 31. Type IX, style 1, spade, ditch or post, closed back.

3.15.5 Style 2, solid shank. Style 2 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 32.




Figure 32. Type IX, style 2, spade, ditch or post, solid shank.

3.15.6 Style 3, plain back. Style 3 spades shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 33.




Figure 33. Type IX, style 3, spade, ditch or post, plain back.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.16 Type X spade, drain.

3.16.1 Blade. The blades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a noncutting step.

3.16.2 Handle. The handles shall conform to the requirements of 3.5.1.

3.16.3 Type X spades. Type X spades shall conform to the dimensions of Table XIV.

TABLE XIV. Type X spade, drain, styles 1, 2, and 3

Size No.	Blade							Handle				Gage of steel
	Width A		Length B		Thickness C		Length of socket or strap D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Min (Inch)	Max (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	5-3/4	6-3/8	15-1/2	16-1/2	0.060	0.085	8	26	28	5	8-1/2	14 or 15

3.16.4 Style 1, closed back. Style 1 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 34.




Figure 34. Type X, style 1, spade, drain, closed back.

3.16.5 Style 2, solid shank. Style 2 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 35.




Figure 35. Type X, style 2, spade, drain, solid shank.

3.16.6 Style 3, plain back. Style 3 spades shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 36.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.



Figure 36. Type X, style 3, spade, drain, plain back.

3.17 Type XI spade, garden.

3.17.1 Blade. The blades for type XI spades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a noncutting step.

3.17.2 Class A, D-handles. Class A spades shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of Table XV.

TABLE XV. Type XI, class A, spade, garden, D-handle, styles 1, 2, 3, and 4

Size No.	Blade					Handle					Gage of steel
	Width A		Length B		Thickness C	Length of socket or strap D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	7	8	11-3/8	12-3/4	0.0897 or 0.0747	8-3/4	26	28	9-1/2	12-1/2	13 or 14

3.17.2.1 Style 1, open back. Style 1 spades shall be in accordance with the requirements specified in 3.2.1 and shall be similar to Figure 37.

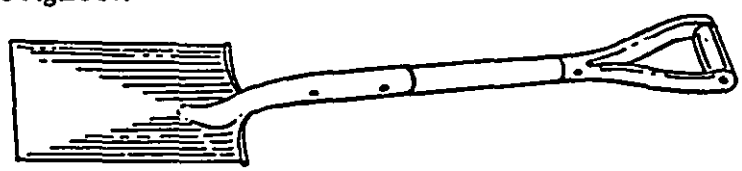


Figure 37. Type XI, class A, style 1, spade, garden, D-handle, open back.

3.17.2.1.1 Replacement handles. Replacement handles for style 1 spades shall conform to the requirements of 3.5.1 and 3.5.3.

3.17.2.2 Style 2, closed back. Style 2 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 38.

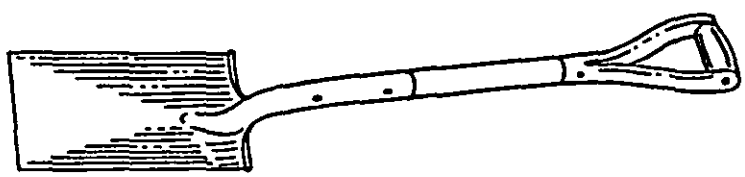


Figure 38. Type XI, class A, style 2, spade, garden, D-handle, closed back.

3.17.2.3 Style 3, solid shank. Style 3 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 39.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

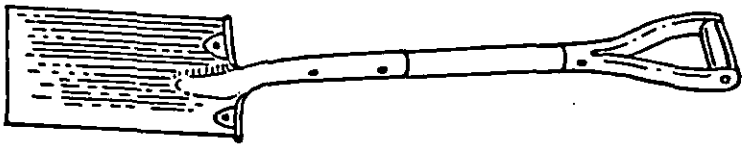


Figure 39. Type XI, class A, style 3, spade, garden, D-handle, solid shank.

3.17.2.4 Style 4, plain back. Style 4 spades shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 40.

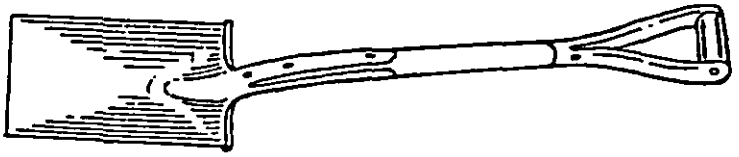


Figure 40. Type XI, class A, style 4, spade, garden, D-handle, plain back.

3.17.3 Class B, long handle. Class B spades shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of Table XVI.

TABLE XVI. Type XI, class B, spade, garden, long handle, styles 1, 2, 3, and 4

Size No.	Blade						Handle				Gage of steel
	Width A		Length B		Thickness C	Length of socket or strap D	Length E		Lift F		
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	
2	7	8	11-3/8	12-3/4	0.0897 or 0.0747	8-3/4	46	52	15	20	13 or 14

3.17.3.1 Style 1, open back. Style 1 spades shall be in accordance with the requirements of 3.2.1 and shall be similar to Figure 41.




Figure 41. Type XI, class B, style 1, spade, garden, long handle, open back.

3.17.3.1.1 Replacement handles. Replacement handles for style 1 open back shall conform to the requirements of 3.5.2 and 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.17.3.2 Style 2, closed back. Style 2 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to Figure 42.




Figure 42. Type XI, class B, style 2, spade, garden, long handle, closed back.

3.17.3.3 Style 3, solid shank. Style 3 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to Figure 43.




Figure 43. Type XI, class B, style 3, spade, garden, long handle, solid back.

3.17.3.4 Style 4, plain back. Style 4 spade shall be in accordance with the requirements of 3.2.4 and shall be similar to Figure 44.




Figure 44. Type XI, class B, style 4, spade, garden, long handle, plain back.

3.18 Type XII spoon, telegraph, eastern pattern.

3.18.1 Blades. The blades shall be plain back and shall conform to the requirements of 3.2.4 and 3.4.

3.18.2 Handles. The handles shall be in accordance with 3.5 and conform to the requirements of 3.14.2.

3.18.3 Type XII spoons. Type XII spoons shall conform to the dimensions of Table XVII and shall be similar to Figure 45.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XVII. Type XII, spoon, telegraph, eastern pattern

Size No.	Blade					Length of strap D	Handle length E		Gage of steel
	Width A		Length B		Thickness C				
	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Nominal (Inch)	Min (Inches)	Min (Inches)	Max (Inches)	
A	9-3/8	10	11-1/2	12-1/2	0.0897	22	93	99	13
B	9-3/8	10	11-1/2	12-1/2	0.0897	22	117	123	13




Figure 45. Type XII, spoon, telegraph, eastern pattern.

3.19 Type XIV shovel, snow, D-handle. Type XIV shovels shall be furnished with a suitable D-handle. At the option of the manufacturer, type XIV shovels shall be either of the assembled type or knockdown type. The handle of the assembled type shall be permanently affixed with at least one rivet, or at least two nails. The handle of the knockdown type shall be so constructed that when assembled by tamping, or other method without the use of tools, it shall not loosen, turn, slip, or become completely detached from the blade and socket under the most severe snow shoveling conditions.

3.19.1 Class A, lightweight. Class A shovels shall have a blade, ribbed for reinforcement purposes, fabricated from an aluminum alloy. When specified (see 6.2), the front of the blade shall be "Teflon" or equal coated. The blade shall have a square point, augmented by a steel wear strip securely riveted to the back of the blade. The socket shall be a separate preformed piece of steel either welded or riveted to the back of the blade. The shovels shall conform to Table XVIII and shall be similar to Figure 46.

TABLE XVIII. Type XIV, class A, shovel, snow, D-handle, light weight

Handle (assembled)		Width of blade A	Height of blade	Thickness of blade
Min (Inches)	Max (Inches)	Min (Inches)	Min (Inches)	Min (Inches)
28	34	16	13	0.040
34	36-1/2	18	14-1/2	0.045

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

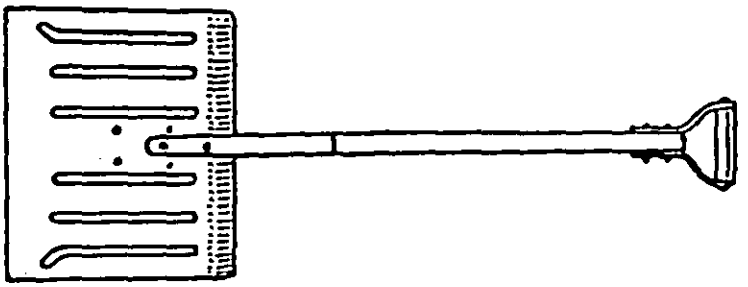


Figure 46. Type XIV shovel, snow, D-handle.

Class A - Light weight
Class B - Medium weight

3.19.2 Class B, medium weight. Class B shovels shall have a blade made of sheet steel not less than 18 gage (0.0478 inch nominal thickness). When specified (see 6.2), the front of the blade shall be "Teflon" or equal coated. The blade shall be square point and either ribbed or plain. The socket shall be a separate preformed piece of steel either welded or riveted to the back of the blade. The shovels shall conform to Table XIX and shall be similar to Figure 46.

TABLE XIX. Type XIV, class B, shovel, snow, D-handle, medium weight

Handle (assembled)		Width of blade A	Height of blade	Weight 1/	
Min (Inches)	Max (Inches)	Min (Inches)	Min (Inches)	Min (Pounds)	Max (Pounds)
28	31	16	13	4	5-3/8
34	36-1/2	17	14	4.9	7

1/ Weight includes the handle.

3.20 Type XV pusher, snow, long handle. Type XV pusher shall be furnished with a long handle conforming to the requirements of 3.5.2. At the option of the manufacturer, type XV snow pushers shall be either of the assembled type or knockdown type. The handle of the assembled type shall be permanently affixed by at least one rivet, nail, or similar fastener(s). The handle of the knockdown type shall be so constructed that when assembled by tamping or other method without the use of tools, it shall not loosen or turn under the most severe snow pushing conditions. The handle shall be not less than 1-1/8 inches on its largest diameter.

3.20.1 Class A, light weight. Class A snow pushers shall have a blade made either of aluminum alloy, magnesium, or similar light weight sheet metal. The blade shall be square point and shall have a steel wear strip and socket in accordance with 3.19.1. When specified (see 6.2), the front of the blade shall be "Teflon" or equal coated. The snow pushers shall conform to Table XXI and shall be similar to Figure 47.

TABLE XXI. Type XV, class A, Pusher, snow, long handle, light weight

Overall length (assembled)		Width of blade A		Height of blade		Weight 1/	
Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Min (Pounds)	Max (Pounds)
55	72	17-1/2	18-1/2	10-1/2	12	3-1/2	4-1/2
55	72	23-1/2	24-1/2	10-1/2	12	4-1/2	5-1/2

1/ Weight includes the handle.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

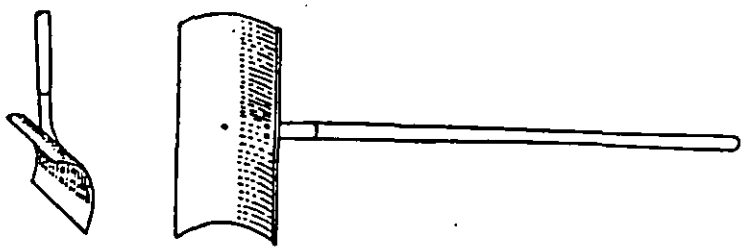


Figure 47. Type XV, pusher, snow, long handle.

Class A - Light weight
Class B - Medium weight

3.20.2 Class B, medium weight. Class B snow pushers shall have a blade made of sheet steel not less than 18 gage (0.0478) inch thickness. When specified (see 6.2), the front of the blade shall be "Teflon" or equal coated. The blade shall be square point and shall have a steel socket in accordance with 3.19.1. The steel in the socket shall be not less than 16 gage (0.0598-inch nominal thickness). The snow pushers shall conform to Table XXII and shall be similar to Figure 47.

TABLE XXII. Type XV, class B, pusher, snow, long handle, medium weight

Overall length (assembled)		Width of blade A		Height of blade	
Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)	Min (Inches)	Max (Inches)
53	62-1/2	17-1/2	18-1/2	10-1/2	12-1/2
53	62-1/2	19-1/2	20-1/2	10-1/2	12-1/2
53	62-1/2	23-1/2	24-1/2	7	10
53	62-1/2	23-1/2	24-1/2	10-1/2	12-1/2

3.21 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for change to this document.

3.22 Workmanship: Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth, dry, adherent, continuous, and not stained or discolored. Fasteners shall be firmly secured and show no evidence of deformation, cross threading, or hazardous burrs. Adhesives and lubricants adequate for their intended purpose shall be properly and neatly applied. Adhesives shall be adequately cured. Wires and cables shall be neatly dressed and shall not be frayed or in contact with sharp edges. Wire and cable insulation shall show no evidence of burns, abrading, or pinch marks. There shall be no interference, binding, or galling of parts. External and bearing surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be clean and free of corrosion and debris (e.g., chips, shavings, slivers) or other foreign material. The item shall be free from manufacturing workmanship defects (e.g., loose, missing, binding or misaligned parts, sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specification and standards to the extent specified, or, if none, in accordance with this specification.

4.2 Sampling procedures. Unless otherwise specified, sampling for inspection shall be performed in accordance with ANSI/ASQC Z1.4.

4.2.1 Intermediate testing. Hardness tests shall be performed as specified in 4.4.1, prior to the application of paint, to determine compliance with applicable requirements. Any reading not within specified values shall be classified a defect. A lot shall consist of blades heat treated as a batch or under the same process and control. The sample unit shall be one shovel. The inspection level shall be level L4, with an acceptable quality level (AQL) of 1.5 defects per hundred units.

4.2.2 Inspection of the end item. Inspection of the shovels shall be performed as specified in the following paragraphs. A lot shall consist of shovels of the same type, class, and style. The sample units shall be one completely fabricated and assembled shovel.

4.2.2.1 Visual examination. Each sample unit shall be visually examined for the defects set forth below. The inspection level shall be level II, with an AQL of 4.0 defects per hundred units.

4.2.2.2 Dimensional examination. Each sample unit shall be examined for dimensions specified in applicable paragraphs and tables. Any deviation therefrom shall constitute a defect. The inspection level shall be level L4, with an AQL of 4.0 defects per hundred units.

Examine	Defect
Design	Not type, class, or style specified
Materials	Not fabricated from specified material
Finish	Not type specified Dirt, grit, or foreign matter imbedded in finish
Construction and workmanship	Any component part missing Any component not properly assembled Fractured, split, malformed, or otherwise impaired effecting serviceability Sharp burr or sliver
Marking	Missing, incomplete, not legible

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

4.3 Testing. Each sample unit shall be tested as specified in 4.4.1 through 4.4.3, as applicable. Any determination not within specified requirements shall constitute a defect. The inspection level shall be L4, with an AQL of 4.0 defects per hundred units.

4.4 Test procedures.

4.4.1 Hardness test. Each sample shovel, scoop, spade, and telegraph spoon selected in accordance with 4.2.1 shall be tested to determine compliance with applicable requirements specified in 3.4.2. Care should be exercised in supporting the blade so that no movement will occur and the surface under test will be horizontal whereby accurate readings may be obtained.

4.4.2 Strength test. All sample tools selected, except type XII telegraph spoons, shall be subjected to the strength test.

4.4.2.1 Strength test for long-handled tools, except type XV. The strength test for long-handled tools, except type XV shall be tested as illustrated in Figure 48. The blade shall be securely clamped and a measurement of the vertical distance (D) made before applying the load. A 175- to 176-pound weight shall then be applied to the handle at point (D) for not less that 120 nor more than 125 seconds. The weight shall then be removed and a remeasurement taken of vertical distance (D). The difference before and after the weight application is the amount of set or bend. Failure is deemed to have occurred when the tool fractures, breaks, or when a permanent bend or set has exceeded 1 inch.

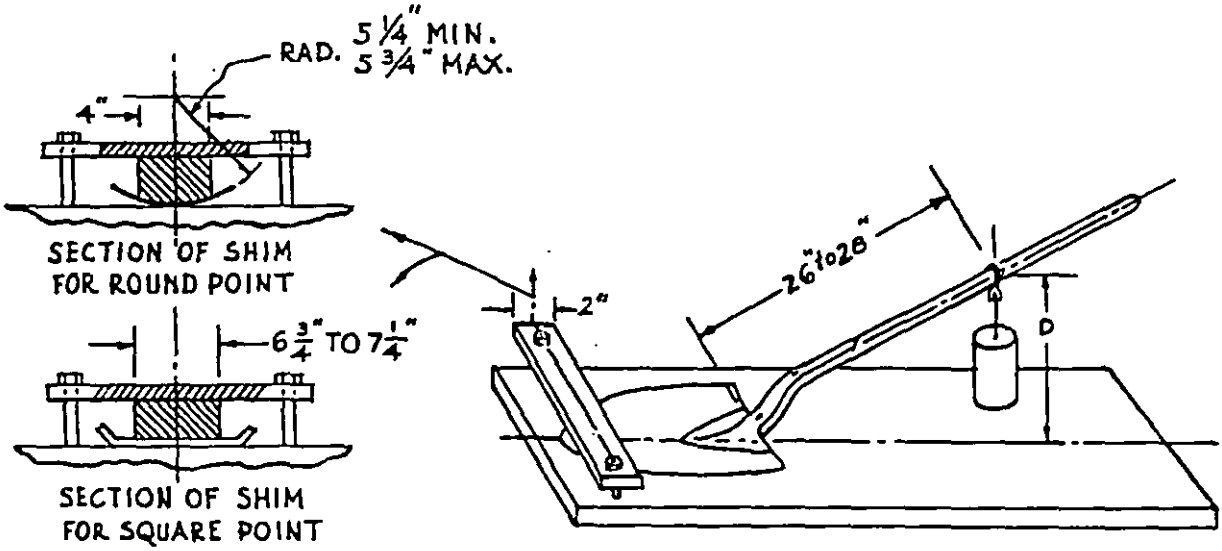


Figure 48. Method of applying test load.

4.4.2.2 Strength test for type VII shovels. The strength test for type VII shovels shall be in accordance with 4.4.2.1 except a 125- to 126-pound weight shall be applied to the handle at point (D).

4.4.2.3 Strength test for D-handled tools, except type XIV. The strength test for D-handled tools, except type XIV, shall be in accordance with 4.4.2.1 except that the load shall be applied to the handle grip.

4.4.2.3.1 D-handles, plastic stiffness test. The stiffness test for the plastic D grip shall be conducted in a manner so that the wood handle shall be securely clamped horizontally and a measurement of the vertical distance from the cob to a fixed reference point be made before applying the load at the center of the cob. The grip shall then be deflected a distance of 1 inch and the resulting load noted. The load shall then be removed and, after an elapsed time of one minute, a remeasurement taken of the vertical distance. the difference before and after the weight application is the amount of set or bend. Failure is deemed to have occurred when the load at 1 inch deflection is less than 60 pounds, or the permanent set exceeds 1/4 inch. The shovel assembly with a plastic D will also meet minimum strength specifications as outlined in 4.4.2.3.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

4.4.2.3.2 D-handles, plastic, impact test. Plastic D grip handles shall withstand an impact load of 55 foot-pounds at 72°F and 35 foot-pounds at 0°F without fracture or failure. Tests shall be conducted in a manner so that a free falling weight shall be dropped under horizontal restraint. The impact load will be the product of the known weight and the distance which shall be selected to produce the required impact loadings. The horizontal restraint will be provided through anti-friction bearings to reduce friction and assure proper impact loadings on contact with the D grip.

4.4.2.4 Strength test for types XIV and XV snow tools. The strength test for types XIV and XV snow tools shall be in accordance with 4.4.2.1 except that a 25-pound test load for class A tools and a 50-pound test load for class B tools shall be used and applied to the handle at a point 24 inches from the top edge of the blade. For this test, the blade shall be clamped securely as illustrated in Figure 48 at a point 3 inches from the point edge and the blade shall be supported directly under the socket end of the handle.

4.5 Inspection of preparation for delivery. Unless otherwise specified, inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with PPP-P-40.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or Commercial, as specified (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The shovels, scoops, spades, snow pushers, and telegraph spoons covered by this specification are intended to be used, where applicable, in handling loose and bulky materials such as dirt, sand, gravel, grain, and snow.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, class, and style, if applicable, of item required (see 1.2.1).
c. Size of tool required (see applicable tables).
d. Coating, if required (see 3.19.1, 3.19.2, 3.20.1, and 3.20.2)
e. Level of preservation, packaging, and packing required (see 5.1).
f. Marking, if other than specified.

6.2.1 Replacement handles. When replacement handles are required specify the following:

a. Type, class, and style tool for which required (3.10.2.1.1, 3.10.3.1.1, 3.11.2.1.1, 3.11.3.1.1, 3.17.2.1.1, and 3.17.3.1.1).
b. Quantity required.

6.2.1.1 Recommendation. It is recommended that no replacement handles, other than those listed in 6.2.1, be procured for Government stock because of the problem of fitting handles which have not been standardized for interchangeability.

6.3 Requirements. The requirements for handles (see 3.5) are in accordance with Simplified Practice Recommendation R76-40. Other requirements of this specification are in accordance with Simplified Practice Recommendation R48-42, insofar as is practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Navy - SH
Air Force - 99

Review Activity

Air Force - 84

PREPARING ACTIVITY:

GSA-FSS

Project Number

5120-0064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.