GGG-V-412a
June 29, 1966

SUPERSEDING
Int. Fed. Spec. GGG-V-00412 (GSA-PSS)
April 21, 1965 and
Fed. Spec. GGG-V-436d (In part) (See 6.3)
June 20, 1958

FEDERAL SPECIFICATION

VISE: HAND; PIN; WIRE ROPE SPLICING; AND SQUARE END SAWING, TUBE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand and bench vises generally used in metalworking and woodworking shops. For intended use of the various types see 6.1.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Vises shall be of the following types, classes, and styles as specified (see 6.2):

Type I.—Hand.
- Class 1.—Hinged jaw.
- Class 2.—Hollow handle.
- Class 3.—Combination bench and hand.
  - Style A.—Without bench clamp.
  - Style B.—With bench clamp.

Type II.—Pin.
- Class 1.—Metal handle.
- Class 2.—Nonmetallic handle.

Type III.—Wire rope splicing.

Type IV.—Square end sawing, tube.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publication.** The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids, or request for proposal shall apply.

National Bureau of Standards (NBS) Handbook:

H28—Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of documents, U. S. Government Printing Office, Washington, D. C., 20402.)

3. REQUIREMENTS

3.1 **Illustrations.** The illustrations herein are descriptive and not restrictive, and are not intended to preclude the purchase of vises otherwise conforming to this specification.

3.2 **Materials.**

3.2.1 Materials used in the construction of vises shall be as hereinafter specified for each type and class. All castings shall be of uniform quality, free of blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. Strength and other essential physical properties of the casting shall be adequate throughout for the purpose intended. When materials are used which are not specifically designated, they shall be entirely suitable for the purpose intended.

3.2.2 *Coatings.* All unmachined surfaces of the component parts of vises shall be given either one coat of baked enamel or lacquer, or one coat of primer and one coat of air-drying enamel or lacquer. In no case shall fillers be used.

3.3 **Identification marking.** Each vise shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.4 **Interchangeability of parts.** All parts having the same manufacturer's number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.5 **Type I, hand.**

3.5.1 *Class 1, hinged jaw.* The vise shall be either forged steel or semisteel and consist essentially of two jaws hinged together at the opposite end from the clamping surfaces, a spring to hold the jaws in the open position, and an operating screw with wing-nut and thrust washer to prevent the wing-nut from cutting into the body.

3.5.1.1 *Jaws.* The jaw facings shall have a Rockwell hardness of 50 to 56 on the C scale (see 4.4.1), and shall be serrated.

3.5.1.2 *Spring.* The jaws shall be distended by a steel spring securely contained between the jaws to prevent displacement.

3.5.1.3 *Screw.* The screw shall have a standard thread and either a wing or knurled nut.

3.5.1.4 Class 1 vise shall conform to the dimensions shown in table I, and be similar to figure 1.

TABLE I. *Type I, class 1, hand, hinged jaw*

Jaw width (nominal) ± 1/16 inch	Jaw opening (minimum)	Overall length	
		Minimum	Maximum
Inches	*Inch*	*Inches*	*Inches*
1-1/2	1	4-1/2	5-1/2




FIGURE 1. Type I, class 1, hand, hinged jaw

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.5.2 *Class 2, hollow handle.* Class 2 vise shall consist of two jaws and a body with handle.

3.5.2.1 Jaw facings shall have a Rockwell hardness of 50 to 56 on the C scale (see 4.4.1), and shall be serrated. Jaws shall have a reamed hole for the insertion of the hinge pin, and the back of each jaw shall extend beyond the hinge to the taper on the handle.

3.5.2.2 *Body and handle.* The body and handle shall have a hole extending through both members of a size comparable to the capacity of the vise to permit the clamping of long rods and wire. The body shall be of steel threaded on one end to engage the threads in the handle. The other end shall have two opposed yoke sections to receive the vise jaws. The handle shall be of steel with a smooth taper on the vise-holding end to facilitate actuation of the jaws. The grip section of the handle shall be either straight or diamond knurled.

3.5.2.3 Class 2 vise shall conform to table II for the size specified (see 6.2), and shall be similar to figure 2.

TABLE II. *Type I, class 2, hand, hollow handle*

Jaw width ± 1/16 inch	Capacity of jaw opening (minimum)	Overall length ± 1/2 inch
Inch	*Inch*	*Inches*
1/4	1/16	4-1/2
1/4	1/8	4-1/2
1/2	1/4	4-1/2



FIGURE 2. Type II, class 2, hand, hollow handle

3.5.3 *Class 3, combination bench and hand.* Class 3 vise shall consist of a body, a pair of jaws, vise screw, screw handle, and vise handle, and shall be furnished with or without bench clamp.

3.5.3.1 *Body.* The body shall be of steel and have two holes, one for the vise screw and the other for the jaw guide pin. The vise screw mounting hole shall be provided with a retaining arrangement for the screw and shall permit the screw to turn without binding. The lower end of the body shall be threaded to allow for mounting.

3.5.3.2 *Jaws and vice screw.* The jaws shall be of steel forgings and controlled by a vise screw. The jaws shall be closed by a clockwise rotation of the screw. Guide pins or other arrangements shall be incorporated to maintain parallelism of the jaws. The facings of both jaws shall be diamond serrated and have a Rockwell hardness of 50 to 63 on the C scale (see 4.4.1). The center of one of the jaw facings shall have a 1/8-inch wide, 90° V notch.

3.5.3.3 *Vise screw.* The vise screw shall be made of steel of not less than 60,000 p.s.i. yield and 80,000 p.s.i. tensile strength (see 4.4.2), and shall have American National, square, acme, modified acme, or buttress threads. One end of the screw shall have a steel head of adequate size which shall be either an integral part of the screw or attached to the screw in a permanent manner. The head shall be provided with a hole to receive the screw handle. The screw shall engage the full length of the threaded bearing of the body when the vise is opened to the maximum capacity.

3.5.3.4 *Screw handle.* The screw handle shall be a straight, round steel bar of a diameter comparable to the size of the vise. The screw handle shall slide freely in the hole of the screwhead with means provided at each end of the handle to prevent complete disengagement from the screwhead.

3.5.3.5 *Vise handle.* The vise handle, if made of nonmetallic material, shall have a threaded steel insert for mounting to the body. When plastic handles are furnished, they shall be capable of withstanding the test specified in 4.4.3.

3.5.3.6 *Style A, without bench clamp.* The vise shall be furnished without bench clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.5.3.7 *Style B, with bench clamp.* The vise shall be furnished with a bench clamp of malleable iron or forged steel.

3.5.3.7.1 *Bench-clamping screw.* The bench-clamping screw shall be of a commercial-steel screwstock with either a knob wing "T" or sliding bar handle. The clamping screw shall be capable of permitting the vise to be securely tightened to bench tops which vary in thickness from 1/2 to 2 inches. The upper or clamping end of the screw shall have a swivel button to compensate for any irregularities of the bench. The screw threads shall conform to NBS H28.

3.5.3.8 Class 3, styles A and B vises shall conform to table III and shall be similar to figure 3.

TABLE III. *Type I, class 3, hand, combination bench and hand*

Jaw width (nominal) ± 1/16 inch	Jaw opening (minimum)	Length over handle ± 1/2 inch
Inches	*Inches*	*Inches*
1-1/2	1-1/2	7

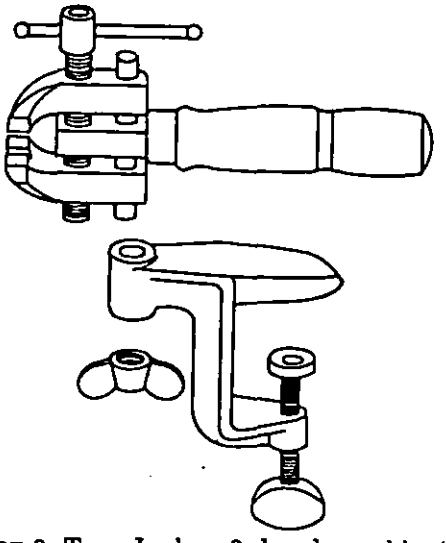


FIGURE 3. Type I, class 3, hand, combination bench and hand, style A without bench clamp, and style B with bench clamp

3.6 **Type II, pin.** Type II pin vise shall consist of a chuck and handle. The handle shall afford a comfortable handgripping surface and be hollowed the full length to permit the work to pass through.

3.6.1 *Chuck.* The chuck shall be of steel and consist of three or four jaws and a sleeve. The design of the chuck shall be such as to permit parallel movement of the gripping surfaces of the jaws and hold work concentrically of a diameter within the rated capacity of the vise.

3.6.1.1 *Jaws.* The jaws shall be of steel and shall show a Rockwell hardness value of not less than 48 nor more than 60 on the C scale (see 4.4.1), or the jaws may be case-hardened to show a hardness value of not less than 83.5 nor more than 90.2 on the Rockwell 15 N scale (superficial).

3.6.1.2 *Sleeve.* The sleeve shall have a knurled grip for adjustment and shall be tapered at the nose end to provide work clearance. The sleeve shall have a metallic, oxide, or phosphate coating produced by chemical treatment of the steel.

3.6.2 *Class 1, metal handle.* The handle shall consist of a knurled section(s) for handgripping, and a smooth section for machine chucking. The knurled section(s) shall extend over at least one-half the length of the handle. The diameter and length of the smooth section shall be equal to or greater than the diameter of the knurled section that passes through the collet or the chuck jaw of the machine. This smooth section shall be located near the chuck end to permit gripping in a machine chuck or collet, and shall be concentric with the chuck jaws of the vise within 0.010-inch total indicator reading. The handle shall have a metallic, oxide, or phosphate coating produced by chemical treatment of the steel.

3.6.2.1 Class 1 vise shall conform to table IV for the size specified (see 6.2), and shall be similar to figure 4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE IV. *Type II, class 1, pin, metal handle*

Nominal capacity	Overall diameter (maximum)	Overall length	
		Minimum	Maximum
Inch	*Inch*	*Inches*	*Inches*
0.000 to 0.040	11/32	2-3/4	3-1/4
.025 to .062	13/32	3-1/4	3-3/4
.045 to .125	15/32	3-1/2	4
.110 to .187	17/32	3-3/4	4-1/4
.175 to .250	19/32	3-7/8	5

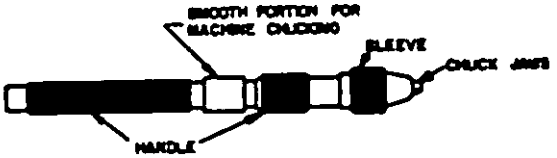


FIGURE 4. Type II, class 1, pin, metal handle

3.6.3 *Class 2, nonmetallic handle.* The handle shall be of hardwood, plastic, or other nonmetallic material. When plastic handles are furnished, they shall be capable of withstanding the test specified in 4.4.3. The vises shall conform to table V, and shall be similar to figure 5.

TABLE V. *Type II, class 2, pin, nonmetallic handle*

Nominal capacity
Inch
0 to 5/32
0 to 1/4




FIGURE 5. Type II, class 2, pin, nonmetallic handle

3.7 Type III, wire rope splicing. Type III vise shall consist of a body, three jaws, two screws, and two screw handles.

3.7.1 *Body.* The body shall be of cast iron, malleable iron, or steel having provision for at least three bench mounting screws or bolts, a horizontal jaw guide with a screw bearing at each end, and a vertical jaw guide with nut.

3.7.2 *Jaws.* The jaws shall be of cast steel or drop forged, designed to travel along the guides without binding for the entire distance of the vise capacity. When facing the vise, the nut portion of the left-hand jaw shall have right-hand threads, and the right-hand jaw, left-hand threads. The jaw faces shall have either one or two smooth grooves with all sharp edges broken and be capable of securely gripping the rope or cable around the thimble.

3.7.3 *Screws.* Both the vertical and horizontal screws shall be made from steel of not less than 60,000 pounds per square inch (p.s.i) yield and 80,000 p.s.i. tensile strength (see 4.4.2). One-half of the horizontal screw at handle end shall have left-hand threads; the other half of the screw shall have right-hand threads so as to activate the jaws in both opening and closing.

3.7.4 *Screw handle.* The screw handle shall be a straight, round steel bar of a diameter comparable to the size of the vise. The screw handle shall slide freely in the hole of the screwhead with means provided at each end of the handle to prevent complete disengagement from the screwhead.

3.7.5 Type III vise shall conform to table VI for the size specified (see 6.2), and shall be similar to figure 6.

TABLE VI. *Type III, wire rope splicing*

Nominal wire rope diameter capacity	Jaw width (minimum)		Jaw opening (minimum)	Screw diameter (minimum)		
	Front	Back		Left jaw	Right jaw	Vertical jaw
Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*
1/16 to 5/8	13/16	1-1/4	3-3/4	3/4	3/4	5/8
3/8 to 1-1/2	1-3/4	2	9-1/2	1-1/4	1-1/4	1-1/4
1-5/8 to 2-1/4	2	2-5/8	22	1-1/4	1-1/4	1-1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

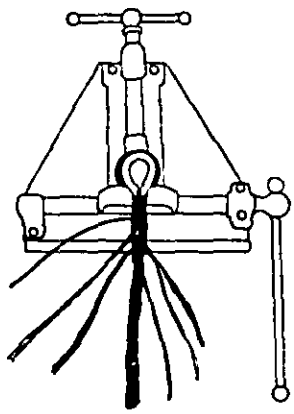


FIGURE 6. Type III, wire rope, splicing

3.8 **Type IV, square end sawing, tube.** Type IV vise shall consist essentially of a base with a V-shaped groove and a saw slot to guide a standard hacksaw blade, an upper jaw with a V-shaped groove, and a screw with a wingnut or handle.

3.8.1 *Base.* The base shall be of steel, cast iron, malleable iron, or a high tensile alluminum alloy. The base shall be capable of being held in a vise and shall have not less than two holes for mounting to a bench. The base shall have a V-shaped groove running the full length of the base capable of accepting tubing from 1/8 inch to and including 1-1/2 inches outside diameter. One end of the base shall have a steel-faced, upright slot, perpendicular to and at right angles to the V-shaped groove, for guiding a standard hacksaw blade in such manner that the tubing can be sawed square. The center portion of the base shall have an upright on each side of the V-shaped groove for supporting the upper jaw, nut and screw. The base shall be 5 inches long, 3 inches wide and 3-1/2 inches high (a tolerance of plus or minus 1/2 inch will be acceptable on all dimensions).

3.8.2 *Nut.* The nut shall either be made integrally with the uprights or shall be capable of swiveling to one side when the upper jaw is loose. A quick release device shall be provided to allow the upper jaw to move into or out of position quickly.

3.8.3 *Screw.* The screw shall be connected to the upper jaw in such manner that the screw shall rotate freely in the upper jaw. The opposite end of the screw shall be securely attached to a wingnut or handle. The wingnut or handle shall not protrude in such manner that it will interfere with the saw when the vise is holding tubing in position for sawing.

3.8.4 *Upper jaw.* The upper jaw shall fit inside the uprights of the base and shall have a V-shaped groove. The depth of the groove shall be such that the vise shall securely hold 1/8 inch to 1-1/2 inch outside diameter tubing in position for sawing.

3.8.5 Type IV vise shall be similar to figure 7.

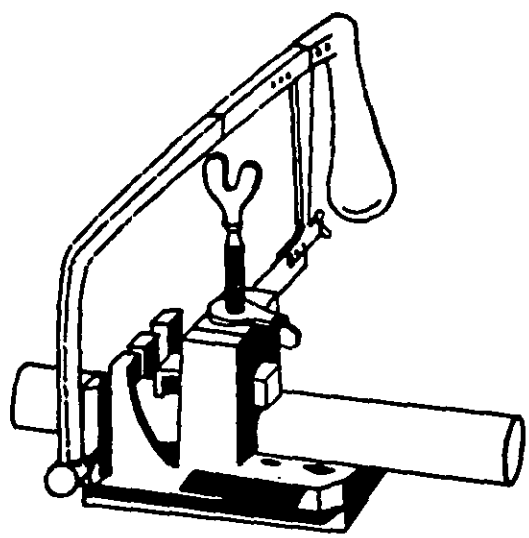


FIGURE 7. Square end sawing, tube

3.9 **Workmanship.** Workmanship shall be in accordance with the best grade of commercial practice covering this equipment. All parts shall be free from defects that may affect the serviceability or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection require-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

ments as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table VII.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in material, design, finish, coating, construction, marking, and workmanship.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Tests.

4.4.1 *Hardness test.* Hardness test shall be conducted in accordance with method 243.1 of Fed. Test Method Std. No. 151 to determine compliance with 3.5.1.1, 3.5.2.1, 3.5.3.2, and 3.6.1.1

4.4.2 *Tension test.* Each sample vise for which the applicable physical requirements of the steel are specified in 3.5.3.3 and 3.7.3, shall be tested in accordance with method 211 of Fed. Test Method Std. No. 151.

4.4.3 *Test procedures for plastic handles.*

4.4.3.1 *Heat distortion test.* The handle of the vise for test shall be completely immersed in boiling water at 212°F. for a period of 2 minutes. At the end of this period, the sample shall be removed from the water and shall show no significant signs of distortion or blistering.

4.4.3.2 *Flammability test.* The metal portion of the vise for test shall be clamped in a support with the handle extended outward in a horizontal position. Under the handle there shall be clamped a piece of 10-mesh Bunsen burner gauze about 5 inches square in a horizontal position, 1/4 inch below the bottom of the handle, and with about 1/2 inch of the handle extending beyond the edge of the gauze. A Bunsen burner with an efficient flame 1/2 to 3/4 inch in height shall be adjusted so that the flame tip will just contact the specimen when placed under the free end of the handle. At the end of 30 seconds, the flame shall be removed and the sample allowed to burn. The rate of travel of the flame shall not exceed 2 inches per minute and shall be determined from

TABLE VII. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 each	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 each	S-2	4.0	Defects per hundred units	4.3.2
Testing	1 each	S-2	2.5	Defects per hundred units	4.4.1 4.4.2
	1 each	S-1	4.0	Defects per hundred units	4.4.3
	1 each	S-2	2.5	Defects per hundred units	4.4.4
Inspection of preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the currentversion before use.

the time required for the flame to travel the length of the handle after the removal of the Bunsen burner. In case the handle does not continue to burn after the first ignition, the burner shall be placed under the free end for a period of 30 seconds immediately following the extinction of the flame. If the handle does not continue to burn after the second ignition and the flame becomes extinct before reaching the opposite end of the handle, the handle shall then be considered self-extinguishing. When tested as described, the plastic handle shall not burn at a rate exceeding 2 inches per minute.

4.4.4 *Concentricity.* Type II vise shall be tested to determine concentricity as specified in 3.6.2.

4.5 **Inspection of preparation for delivery requirements.** An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table VIII. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery.

TABLE VIII. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 **Preservation, packaging, and packing.** Unless otherwise specified (see 6.2), the vises shall be preserved, packaged, and packed in accordance with MIL-H-15424. The levels of preservation and packaging shall be A or C, and the level of packing A, B, or C as specified (see 6.2).

5.1.1 As part of the requirements of section 5 of this specification, table VIII is considered as part of and used in lieu of that portion of table I of MIL-H-15424 covering vises.

TABLE IX.

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6
Vise:					
Miscellaneous:					
Hand					
Bench and hand					
Up through 5 pounds	P-2, P-5	I	1		24
5 through 10 pounds	P-2, P-5	I	1		12
10 through 20 pounds	P-2, P-5	I	1		8
20 through 50 pounds	P-2, P-5	I	1		2
50 pounds and over	P-2, P-5	I	1		1

5.2 **Marking.**

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Intended use.**

6.1.1 Type I vises are intended for light work and are designed with a handle for holding in the hand.

6.1.2 Type II vises are intended for holding small items which are usually round, and are suitable for holding in the hand.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Vises are designed with a hollow handle on one end and a chuck on the other end.

6.1.3 Type III vises are intended for holding various sizes of cable during splicing operations and are suitable for bench mounting.

6.1.4 Type IV vises are intended to grip tubing for sawing with a hacksaw and for ensuring that the end of the tubing is cut square. The vises are suitable for either bench mounting or being held in a larger vise.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and style of vise required (see 1.2).
(c) Size, jaw width, or capacity required (see applicable table).
(d) Levels of preservation, packaging, and packing required (see 5.1).

6.2.1 When replacement parts are required, the procurement document should specify the following:

(a) The name or trademark of the manufacturer of the vise for which the part is required.
(b) Proper name or number of the part required.
(c) Quantity of each item required.
(d) Other data or description applicable to the vise which will assist in identifying the proper replacement parts.

6.3 Supersession data. The classification of vises covered in this specification corresponding to those covered in Federal Specification GGG-V-436d are as follows:

GGG-V-436d	GGG-V-412
Type V.—Hand.	Type I.—Hand.
Class 1.—Hinged jaw.	Class 1.—Hinged jaw.
Class 2.—Hollow handle.	Class 2.—Hollow handle.
Class 3.—Combination bench and hand.	Class 3.—Combination bench and hand.
Style A.—Without bench clamp.	Style A.—Without bench clamp.
Style B.—With bench clamp.	Style B.—With bench clamp.
Type IX.—Pin.	Type II.—Pin.
Class 1.—Metal handle.	Class 1.—Metal handle.
Class 2.—Nonmetallic handle.	Class 2.—Nonmetallic handle.
Type XI.—Wire rope splicing.	Type III.—Wire rope splicing.
Type XX.—Sawing vise, tubing.	Type IV.—Square end sawing, tube.

MILITARY INTEREST:

Custodians:	*Review Activity:*	*User Activities:*
Army — GL	GL	EL, MI, MD, WC, CE
Navy — Coordination waived		
Air Force — Coordination waived		

Preparing Activity:
GSA-FSS

GSA 3C-8911500360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.