GGG-V-412B
March 7, 1994
SUPERSEDING
GGG-V-412A
June 29, 1966

FEDERAL SPECIFICATION

VISE: HAND; PIN; WIRE ROPE SPLICING; AND SQUARE END SAWING, TUBE

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand and bench vises generally used in metalworking and woodworking shops.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. The vises shall be of the following types, classes, and styles, as specified (see 6.2):

Type I			- Hand
	Class 1		- Hinged jaw
	Class 2		- Hollow handle
	Class 3		- Combination bench and hand
		Style A	- Without bench clamp
		Style B	- With bench clamp
Type II			- Pin
	Class 1		- Metal handle
	Class 2		- Nonmetallic handle
Type III			- Wire rope splicing
Type IV			- Square end sawing, tube

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40 - Preservation and Packing of Hand Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery

Federal Standards:

FED-STD-H28 - Screw-Threads Standards for Federal Services
FED-STD-123 - Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM):

ASTM E 8 - Methods of Tension Testing of Metallic Materials
ASTM E 18 - Methods of Test for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of vises otherwise conforming to this specification.

3.2 Marking. Each item shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture. The marking shall be engraved, etched, or stamped in such a manner that it will be permanent to the extent that it will remain clear and legible throughout the life of the item.

3.3 Materials. The materials used in the construction of vises shall be as hereinafter specified for each type and class. All castings shall be of uniform quality, free of blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. Strength and other essential physical properties of the casting shall be adequate throughout for the purpose intended. When materials are used which are not specifically designated, they shall be entirely suitable for the purpose intended.

3.4 Coatings. All unmachined surfaces of the component parts of vises shall be given either one coat of baked enamel or lacquer, or one coat of primer and one coat of air-drying enamel or lacquer. In no case shall fillers be used.

3.5 Interchangeability of parts. All parts having the same manufacturer's number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.6 Type I, hand vise.

3.6.1 Class 1, hinged jaw vise. The class 1, hinged jaw vise shall be of either forged steel, hardenable malleable iron, or semisteel and consist essentially of two jaws hinged together at the opposite end from the clamping surfaces with a steel pin no less than 1/8 inch in diameter, a spring to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

hold the jaws in the open position, and an operating screw with wing nut and thrust washer to prevent the wing nut from cutting into the body.

3.6.1.1 Jaw facings. When specified herein the jaw facings shall have a Rockwell C hardness (HRC) of 50 to 56 (see 4.4.1), and shall be serrated to a depth of 1/32 inch -0.010 inch. A longitudinal and transverse V notch 1/8 inch wide by 90° shall be located in the center of either jaw. There shall not be more than 3/64 inch sideways play in the jaws.

3.6.1.2 Spring. The jaws shall be distended by a steel spring securely contained between the jaws to prevent displacement.

3.6.1.3 Screw. The screw shall be provided with a washer and steel wing nut not less than 1-1/8 inches across the tip. The screw, washer, and wing nut shall be plated.

3.6.1.4 Dimensions. The class 1, hinged jaw vise shall conform to the dimensions shown in table I and be similar to figure 1.

TABLE I. Type I, hand, class 1, hinged jaw vise

Jaw width ± 1/16 inch	Jaw opening (minimum)	Overall length		Weight (maximum)
		Minimum	Maximum	
Inches	Inch	Inches	Inches	Ounces
1-1/2	1	4-1/2	5-1/2	15

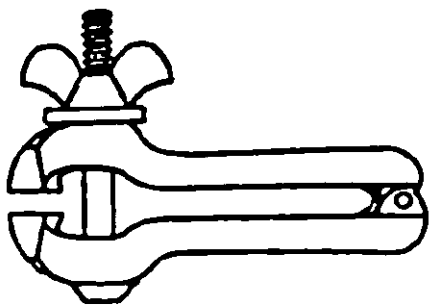


Figure 1. Type I, hand, class 1, hinged jaw vise.

3.6.2 Type I, class 2, hollow handle vise. The type I, class 2, hollow handle vise shall consist of two jaws and body with handle.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.6.2.1 Jaw facings. The jaw facings shall be an HRC of 50 to 56 (see 4.4.1), and shall be serrated. The jaws shall have a reamed hole for the insertion of the hinge pin, and the back of each jaw shall extend beyond the hinge to the taper on the handle.

3.6.2.2 Body and handle. The body and handle shall have a hole extending through both members of a size comparable to the capacity of the vise to permit the clamping of long rods and wire. The body shall be of steel, threaded on one end to engage the threads in the handle. The other end shall have two opposed yoke sections to receive the vise jaws. The handle shall be of steel with a smooth taper on the vise-holding end to facilitate actuation of the jaws. The grip section of the handle shall be either straight or diamond knurled.

3.6.2.3 Dimensions. The class 2, hollow handle vise shall conform to table II for the size specified (see 6.2), and shall be similar to figure 2.

TABLE II. Type I, hand, class 2, hollow handle vise

Jaw width ± 1/16 inch	Capacity of jaw opening (minimum)	Overall length ± 1/2 inch
Inch	Inch	Inches
1/4	1/16	4-1/2
1/4	1/8	4-1/2
1/2	1/4	4-1/2




Figure 2. Type II, hand, class 2, hollow handle vise.

3.6.3 Type I, class 3, combination bench and hand vise. The type I, class 3, combination bench and hand vise shall consist of a body, a par of jaws, vise screw, screw handle, and vise handle and shall be furnished with or without a bench clamp.

3.6.3.1 Body. The body shall be of steel and have two holes: one for the vise screw and the other for the jaw guide pin. The vise screw mounting hole shall be provided with a retaining arrangement for the screw and shall permit the screw to turn without binding. The lower end of the body shall be threaded to allow for mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.6.3.2 Jaws and vise screw. The jaws shall be of steel and controlled by a vise screw. The jaws shall be closed by a clockwise rotation of the screw. Guide pins or other arrangements shall be incorporated to maintain parallelism of the jaws. The facings of both jaws shall be diamond serrated and have an HRC of 50 to 63 (see 4.4.1). The center of one of the jaw facings shall have a 1/8 inch wide, 90° V notch.

3.6.3.3 Vise screw. The vise screw shall be made of steel of not less than 60,000 pounds per square inch (psi) yield and 80,000 psi tensile strength (see 4.4.2), and shall have unified or American National, square, acme, modified acme, or buttress threads. One end of the screw shall have a steel head of adequate size which shall be either an integral part of the screw or attached to the screw in a permanent manner. The head shall be provided with a hole to receive the screw handle. The screw shall engage the full length of the threaded bearing of the body when the vise is opened to the maximum capacity.

3.6.3.4 Screw handle. The screw handle shall be a straight, round steel bar of a diameter comparable to the size of the vise. The screw handle shall slide freely in the hole of the screw head with means provided at each end of the handle to prevent complete disengagement from the screw head.

3.6.3.5 Vise handle. The vise handle, if made of nonmetallic material, shall have a threaded steel insert for mounting to the body. When plastic handles are furnished, they shall be capable of withstanding the test specified in 4.4.3.

3.6.3.6 Type I, style A without bench clamp vise. The type I, style A without bench clamp vise shall be furnished without a bench clamp.

3.6.3.7 Type I, style B with bench clamp vise. The type I, style B with bench clamp vise shall be furnished with a bench clamp of malleable iron or forged steel.

3.6.3.7.1 Bench-clamping screw. The bench-clamping screw shall be of a commercial steel screw stock with either a knob wing "T" or sliding bar handle. The clamping screw shall be capable of permitting the vise to be securely tightened to bench tops which vary in thickness from 1/2 inch to 2 inches. The upper or clamping end of the screw shall have a swivel button to compensate for any irregularities of the bench. The screw threads shall conform to FED-STD-H28.

3.6.3.8 Type I, class 3, styles A and B, combination bench and hand vises. The type I, class 3, styles A and B, combination bench and hand vises shall conform to table III and shall be similar to figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE III. Type I, hand, class 3, styles A and B, combination bench and hand vise

Jaw width ± 1/16 inch	Jaw opening (minimum)	Length over handle ± 1/2 inch
Inches	Inches	Inches
1-1/2	1-1/2	7

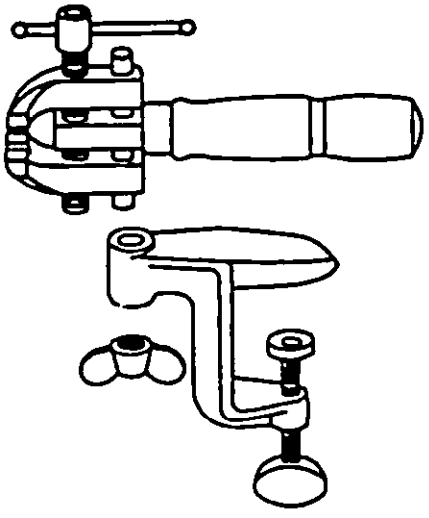


Figure 3. Type I, hand, class 3, combination bench and hand, style A without bench clamp, and style B with bench clamp vise.

3.7 Type II, vise. The type II vise shall consist of a chuck and handle. The handle shall afford a comfortable handgripping surface and be hollowed the full length to permit the work to pass through.

3.7.1 Chuck. The chuck shall be of steel and consist of three or four jaws and a sleeve. The design of the chuck shall be such as to permit parallel movement of the gripping surfaces of the jaws and hold work concentrically of a diameter within the rated capacity of the vise.

3.7.1.1 Jaws. The jaws shall be of steel and shall show an HRC of not less than 48 nor more than 60 (see 4.4.1), or the jaws may be case hardened to show a superficial hardness value of not less than 83.5 nor more than 90.2 on the N scale.

3.7.1.2 Sleeve. The sleeve shall have a knurled grip for adjustment and shall be tapered at the nose end to provide work clearance. The sleeve shall have a metallic, oxide, or phosphate coating produced by chemical treatment of the steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.7.2 Type II, class 1 metal handle vise. The type II, class 1 metal handle vise shall consist of a knurled section(s) for handgripping, and a smooth section for machine chucking. The knurled section(s) shall extend over at least one-half the length of the handle. The diameter and length of the smooth section shall be equal to or greater than the diameter of the knurled section that passes through the collet or the chuck jaw of the machine. This smooth section shall be located near the chuck end to permit gripping in a machine chuck or collet, and shall be concentric with the chuck jaws of the vise within 0.010 inch total indicator reading. The handle shall have a metallic, oxide, or phosphate coating produced by chemical treatment of the steel.

3.7.2.1 Dimensions. The type II, class 1 metal handle vise shall conform to table IV for the size specified (see 6.2), and shall be similar to figure 4.

TABLE IV. Type II, pin, class 1, metal handle vise

Nominal capacity	Overall diameter (maximum)	Overall length	
		Minimum	Maximum
Inch	Inch	Inches	Inches
0.000 to 0.040	11/32	2-3/4	3-1/4
0.025 to 0.062	13/32	3-1/4	3-3/4
0.045 to 0.125	15/32	3-1/2	4
0.110 to 0.187	17/32	3-3/4	4-1/4
0.175 to 0.250	19/32	3-7/8	5

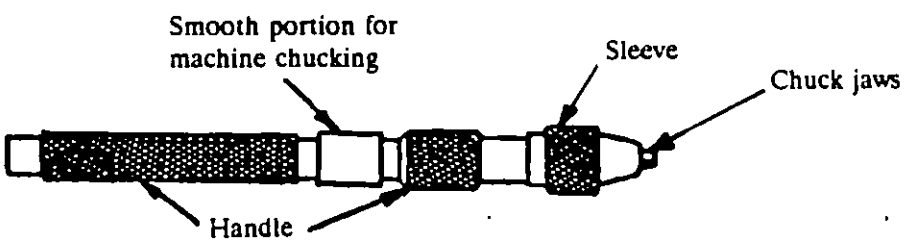


Figure 4. Type II, pin, class 1 metal handle vise.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T12:39Z
Check the source to verify that this is the current version before use.

3.7.3 Type II, class 2, nonmetallic handle vise. The type II, class 2 nonmetallic handle vise shall be of hardwood, plastic, or other nonmetallic material. When plastic handles are furnished, they shall be capable of withstanding the test specified in 4.4.3. The vises shall conform to table V and shall be similar to figure 5.

TABLE V. Type II, pin, class 2 nonmetallic handle vise

Nominal capacity
Inch
0 to 5/32
0 to 1/4



Figure 5. Type II, pin, class 2, nonmetallic handle vise.

3.8 Type III, wire rope splicing vise. The type III, wire rope splicing vise shall consist of a body, three jaws, two screws, and two screw handles.

3.8.1 Body. The body shall be of cast iron, malleable iron, or steel having provision for at least three bench mounting screws or bolts, a horizontal jaw guide with a screw bearing at each end, and a vertical jaw guide with nut.

3.8.2 Jaws. The jaws shall be of cast steel or drop forged, designed to travel along the guides without binding for the entire distance of the vise capacity. When facing the vise, the nut portion of the left-hand jaw shall have right-hand threads, and the right-hand jaw shall have left-hand threads. The jaw faces shall have either one or two smooth grooves with all sharp edges broken and be capable of securely gripping the rope or cable around the thimble.

3.8.3 Screws. Both the vertical and horizontal screws shall be made from steel of not less than 60,000 psi yield and 80,000 psi tensile strength (see 4.4.2). One-half of the horizontal screw at handle end shall have left-hand threads; the other half of the screw shall have right-hand threads so as to activate the jaws in both opening and closing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.8.4 Screw handle. The screw handle shall be a straight, round steel bar of a diameter comparable to the size of the vise. The screw handle shall slide freely in the hole of the screw head with means provided at each end of the handle to prevent complete disengagement from the screw head.

3.8.5 Dimensions. The type III, wire rope splicing vise shall conform to table VI for the size specified (see 6.2), and shall be similar to figure 6.

TABLE VI. Type III, wire rope splicing vise

Nominal wire rope diameter capacity	Jaw width (minimum)		Jaw opening (minimum)	Screw diameter (minimum)		
	Front	Back		Left jaw	Right jaw	Vertical jaw
Inches	Inches	Inches	Inches	Inches	Inches	Inches
1/16 to 5/8	13/16	1-1/4	3-3/4	3/4	3/4	5/8
3/8 to 1-1/2	1-3/4	2	9-1/2	1-1/4	1-1/4	1-1/4
1-5/8 to 2-1/4	2	2-5/8	22	1-1/4	1-1/4	1-1/4

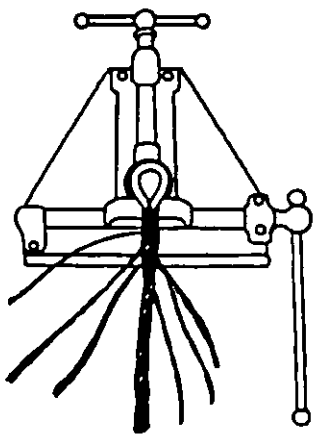


Figure 6. Type III, wire rope splicing vise.

3.9 Type IV, square end sawing, tube vise. The type IV, square end sawing, tube vise shall consist essentially of a base with a V-shaped groove and a saw slot to guide a standard hacksaw blade, an upper jaw with a V-shaped groove, and a screw with a wing nut or handle.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

3.9.1 Base. The base shall be of steel, cast iron, malleable iron, or a high tensile aluminum alloy. The base shall be capable of being held in a vise and shall have not less than two holes for mounting to a bench. The base shall have a V-shaped groove running the full length of the base capable of accepting tubing from 1/8 inch to and including 1-1/2 inches outside diameter. One end of the base shall have a steel-faced, upright slot, perpendicular to and at right angles to the V-shaped groove, for guiding a standard hacksaw blade in such a manner that the tubing can be sawed square. The center portion of the base shall have an upright on each side of the V-shaped groove for supporting the upper jaw, nut, and screw. The base shall be 5 inches long, 3 inches wide, and 3-1/2 inches high (a tolerance of ± 1/2 inch will be acceptable on all dimensions).

3.9.2 Nut. The nut shall either be made integrally with the uprights or shall be capable of swiveling to one side when the upper jaw is loose. A quick release device shall be provided to allow the upper jaw to move into or out of position quickly.

3.9.3 Screw. The screw shall be connected to the upper jaw in such a manner that the screw shall rotate freely in the upper jaw. The opposite end of the screw shall be securely attached to a wing nut or handle. The wing nut or handle shall not protrude in such a manner that it will interfere with the saw when the vise is holding tubing in position for sawing.

3.9.4 Upper jaw. The upper jaw shall fit inside the uprights of the base and shall have a V-shaped groove. The depth of the groove shall be such that the vise shall securely hold 1/8 inch to 1-1/2 inch outside diameter tubing in position for sawing.

3.9.5 Type IV, square end sawing tube vise. The type IV, square end sawing tube vise shall be similar to figure 7.

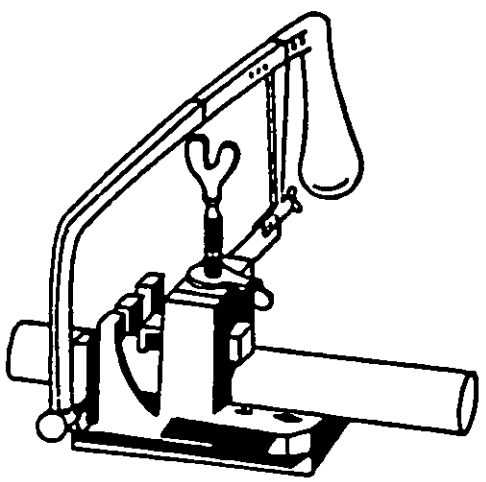


Figure 7. Type IV, square end sawing tube vise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.10 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for change to this document.

3.11 Workmanship. Workmanship shall be in accordance with the best grade of commercial practice covering this equipment. All parts shall be free from defects that may affect the serviceability or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specification and standards to the extent specified, or, if none, in accordance with this specification.

4.2 Sampling procedures. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.3 Examination.

4.3.1 End item visual examination. The end items shall be examined for the defects listed in table VII. The lot size shall be expressed in terms of vises. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0 for total (major and minor combined) defects.

TABLE VII. End item visual defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling Distortion of container
Contents	Number per container is more or less than required Net weight exceeds requirements

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements. The lot size shall be expressed in terms of vises. The sample unit shall be one vise. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4 Tests.

4.4.1 Hardness test. A hardness test shall be conducted in accordance with ASTM E 18 to determine compliance with 3.6.1.1, 3.6.2.1, 3.6.3.2, and 3.7.1.1.

4.4.2 Tension test. Each sample vise for which the applicable physical requirements of the steel are specified in 3.6.3.3 and 3.8.3 shall be tested in accordance with ASTM E 8.

4.4.3 Test procedures for plastic handles.

4.4.3.1 Heat distortion test. The handle of the vise for test shall be completely immersed in boiling water at 212°F for a period of two minutes. At the end of this period, the sample shall be removed from the water and shall show no significant signs of distortion or blistering.

4.4.3.2 Flammability test. The metal portion of the vise for test shall be clamped in a support with the handle extended outward in a horizontal position. Under the handle there shall clamped a piece of 10-mesh Bunsen burner gauze about 5 inches square in a horizontal position. 1/4 inch below the bottom of the handle, and with about 1/2 inch of the handle extending beyond the edge of the gauze. A Bunsen burner with an efficient flame 1/2 inch to 3/4 inch in height shall be adjusted so that the flame tip will just contact the specimen when placed under the free end of the handle. At the end of 30 seconds, the flame shall be removed and the sample allowed to burn. The rate of travel of the flame shall not exceed 2 inches per minute and shall be determined from the time required for the flame to travel the length of the handle after the removal of the Bunsen burner. In case the handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

does not continue to burn after the first ignition, the burner shall be placed under the free end for a period of 30 seconds immediately following the extinction of the flame. If the handle does not continue to burn after the second ignition and the flame becomes extinct before reaching the opposite end of the handle, the handle shall then be considered self-extinguishing. When tested as described, the plastic handle shall not burn at a rate exceeding 2 inches per minute.

4.4.4 Concentricity. The type II, pin vise shall be tested to determine concentricity as specified in 3.7.2.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking are in accordance with PPP-P-40 (see 5.1).

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or Commercial, as specified (see 6.1).

5.2 Marking.

5.2.1 Civil agencies. In addition to any special markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.2.2 Military activities. In addition to any special markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use.

6.1.1 Type I vises. The type I vises are intended for light work and are designed with a handle for holding in the hand.

6.1.2 Type II vises. The type II vises are intended for holding small items which are usually round and are suitable for holding in the hand. The vises are designed with a hollow handle on one end and a chuck on the other end.

6.1.3 Type III vises. The type III vises are intended for holding various sizes of cable during splicing operations and are suitable for bench mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

6.1.4 Type IV vises. The type IV vises are intended to grip tubing for sawing with a hacksaw and for ensuring that the end of the tubing is cut square. The vises are suitable for either bench mounting or being held in a larger vise.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, class, and style of vise required (see 1.2.1).
c. Size, jaw width, or capacity required (see applicable table).
c. Level of preservation, packaging, and packing required (see 5.1).
d. Marking, if other than specified (see 5.1).

6.2.1 Replacement parts. When replacement parts are required, the procurement document should specify the following:

(a) The name or trademark of the manufacturer of the vise for which the part is required.
(b) Proper name or number of the part required.
(c) Quantity of each item required.
(d) Other data or description applicable to the vise which will assist in identifying the proper replacement parts.

6.3 Supersession data. The classification of vises covered in this specification corresponding to those covered in Federal Specification GGG-V-436D are as follows:

TABLE VIII. Supersession data

GGG-V-436D	GGG-V-412
Type V - Hand	Type I - Hand
Class 1 - Hinged jaw	Class 1 - Hinged jaw
Class 2 - Hollow handle	Class 2 - Hollow handle
Class 3 - Combination bench and hand	Class 3 - Combination bench and hand
Style A - Without bench clamp	Style A - Without bench clamp
Style B - With bench clamp	Style B - With bench clamp
Type IX - Pin	Type II - Pin
Class 1 - Metal handle	Class 1 - Metal handle
Class 2 - Nonmetallic handle	Class 2 - Nonmetallic handle
Type XI - Wire rope splicing	Type III - Wire rope splicing
Type XX - Sawing vise, tubing	Type IV - Square end sawing, tube

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - GL
Air Force - 99

Review Activity:

Air Force - 82

MILITARY COORDINATING ACTIVITY:

Army - GL

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.