GGG–V–440a
April 4, 1967

SUPERSEDING
Int. Fed. Spec. GGG–V–00440(GSA–FFS)
April 21, 1965 and
Fed. Spec. GGG–V–436d (In Part)
June 20, 1958
(See 6.3)

FEDERAL SPECIFICATION

VISE, HANDSAW, FILING; BAND SAW FILING; AND CIRCULAR SAW FILING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers vises for holding handsaw, band saw, and circular saw blades during teeth-sharpening operations.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types and classes. Saw filing vises covered by this specification shall be of the following types and classes as specified (see 6.1):

Type I.—Handsaw filing.
  Class 1.—With filing guide.
  Class 2.—Without filing guide.
Type II.—Band saw filing.
Type III.—Circular saw filing.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposals, form a part of this specification:

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL–H–15424—Hand Tools, Packaging of.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards (NBS) Handbook:

H28—Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive, and are not intended to preclude the purchase of vises otherwise conforming to this specification.

3.2 Materials.

3.2.1 Materials used in the construction of vises shall be as hereinafter specified. All castings shall be of uniform quality free of blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. Strength and other essential physical properties of the casting shall be adequate throughout for the purpose intended. When materials are used which are not specifically designated, they shall be entirely suitable for the purpose intended.

3.2.2 Coating. All unmachined surfaces of the component parts of vises shall be given either one coat of baked enamel or lacquer, or one coat of primer and one coat of air-drying enamel or lacquer. In no case shall fillers be used.

3.3 Identification marking. Each vise shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.4 Interchangeability of parts. All parts having the same manufacturer's number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.5 Screw threads. The screw threads used on vises shall be in accordance with NBS Handbook H28.

3.6 Type 1, handsaw filing.

3.6.1 Class 1, with filing guide. Class 1 vise shall consist of a base, clamping screw, body with back jaw, front jaw, clamping lever, and filing guide.

3.6.1.1 Base. The base shall be of gray or malleable iron casting and have a yoke section to form a bench-clamping arrangement. A hole above the yoke section shall be provided for the body mounting.

3.6.1.2 Bench-clamping screw. The bench-clamping screw shall be of a commercial-steel screwstock with either a knob wing "T" or sliding bar handle. The clamping screw shall be capable of permitting the vise to be securely tightened to bench tops which vary in thickness from ½ to 2 inches. The upper or clamping end of the screw shall have a swivel button to compensate for any irregularities of the bench. The screw threads shall conform to 3.5.

3.6.1.3 Body with back jaw. The body shall be a gray or malleable iron casting and U-shaped. The depth and width of the U-section shall be such as to receive the widest and thickest of handsaws. The body shall be attached to the base in a manner to permit the vise to be adjusted to various degrees of tilt. The adjustment shall be of such design as to rigidly hold the vise at any angular tilt. The back

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

jaw shall be an integral part of the body and shall be located on the top of the back leg of the U-section. The front jaw shall pivot from the top of the front leg of the U-section by means of a hardened steel pivot pin. The clamping lever shall be mounted to the front leg of the body casting in a manner similar to that of the front jaw.

3.6.1.4 Front jaw. The front jaw shall be of the same material as the body with back jaw and shall have an extension to engage the cam or eccentric of the clamping lever.

3.6.1.5 Clamping lever. The clamping lever shall be a gray or malleable-iron casting and shall close the jaws either by cam or eccentric action. The lever shall open the jaws when lifted and close them when lowered.

3.6.1.6 Filing guide. The filing guide shall be mounted on the back jaw, shall be so designed as to guide the file at the proper angle, and shall be so mounted as to be detachable.

3.6.1.7 Class 1 vise shall conform to table I for the size specified (see 6.1), and shall be similar to figure 1.

TABLE I. Type I, classes 1 and 2, handsaw filing with, or without, filing guide.

Jaw width (nominal) ± ½ inch	Guide length (minimum)	Weight (minimum)
Inches	Inches	Pounds
9½	14½	7
12½	16	11

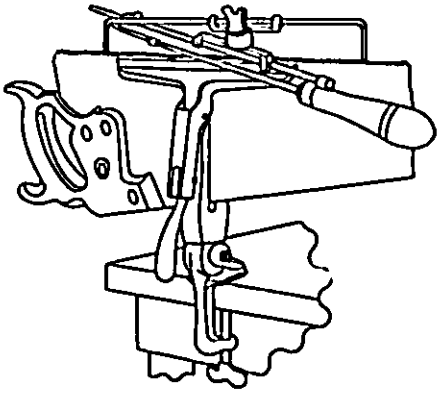


Figure 1. Type I, class 1, handsaw filing, with filing guide.

3.6.2 Class 2, without filing guide. Class 2 vise shall conform to the requirements specified for class 1 (see 3.6.1) except that it shall not have a filing guide.

3.7 Type II, band saw filing.

3.7.1 Type II, band saw filing vise shall be of the same material and similar in design to type I, class 1 (see 3.6.1) except that it shall have adjustable steps on both ends of the back jaw for locating the saw blades. Type II vise shall conform to table II for the size specified (see 6.1), and shall be similar to figure 2 for jaw widths under 15 inches, and figure 3 for jaw widths over 15 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE II. Type II, band saw filing.

Jaw width (nominal) ± ½ inch	Throat depth (minimum)	Weight (approximate)
Inches	Inches	Pounds
12¾	6	9½
36	7	60
42	10	100

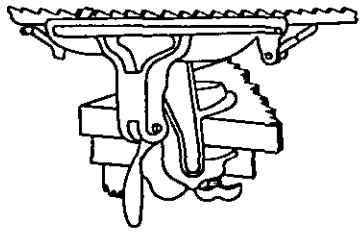


Figure 2. Type II, band saw filing, jaw width under 15 inches.




Figure 3. Type II, band saw filing, jaw width over 15 inches.

3.8 Type III, circular saw filing. Type III vise shall consist of a base and body with back jaw, front jaw, and vise screw with handle or a quick-acting, cone-type clamping device. The vise shall be capable of clamping circular saws from 5 to 18 inches in diameter.

3.8.1 Base. The base shall be of steel, gray malleable, or cast iron. The base shall be provided with suitable means for bench mounting of the vise.

3.8.2 Body with back jaw or cone-clamping device.

3.8.2.1 Body with back jaw. Where applicable, the body shall be of the same material as the base. The back jaw shall be an integral part of the body. The plane of the inside face of the jaw shall be parallel with the inside face of the front jaw, and shall distribute even pressure over the entire area of the jaw face.

3.8.2.2 Body with cone-clamping device. When applicable, the body shall be of the same material as the base. The body shall be hinged to the base so that the saw can be tilted and locked at any desired angle from vertical to 45°. The body shall be designed to support the blade at the filing point to prevent chatter. The filing point of the body shall be provided with replaceable hardened steel lip to protect the filing support. The cone-clamping device shall consist of a cup-shape saw blade back-up support with threaded stud and a quick-acting threaded cone-shaped saw blade locking clamp, designed to accommodate saw arbor hole sizes from ½ to 1¾ inches. Means shall be provided for additional outer support for saw blades of large diameter to prevent chatter.

3.8.3 Front jaw. When applicable, the front jaw shall be of the same material as the body with back jaw. The front jaw shall be attached to the body in such a manner to allow the jaw to open and close properly.

3.8.4 Jaw or cone device facings. The jaw facing of both the back and front jaws or cone device facings which clamp the sides of the saw shall be properly hardened to prevent scoring or burring of the facings. All burrs and sharp edges shall be broken.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

3.8.5 Vise screw. When applicable, the vise screw shall be of commercial screw stock made from steel of not less than 60,000 pounds per square inch (p.s.i.) yield and 80,000 p.s.i. tensile strength (see 4.4.1). The end of the screw shall be provided with means for receiving the handle.

3.8.6 Screw handle. When applicable, the screw handle shall be either a forged ball lever or a straight round bar of a diameter comparable to the size of the vise.

3.8.7 Type III vise shall be similar to figure 4.

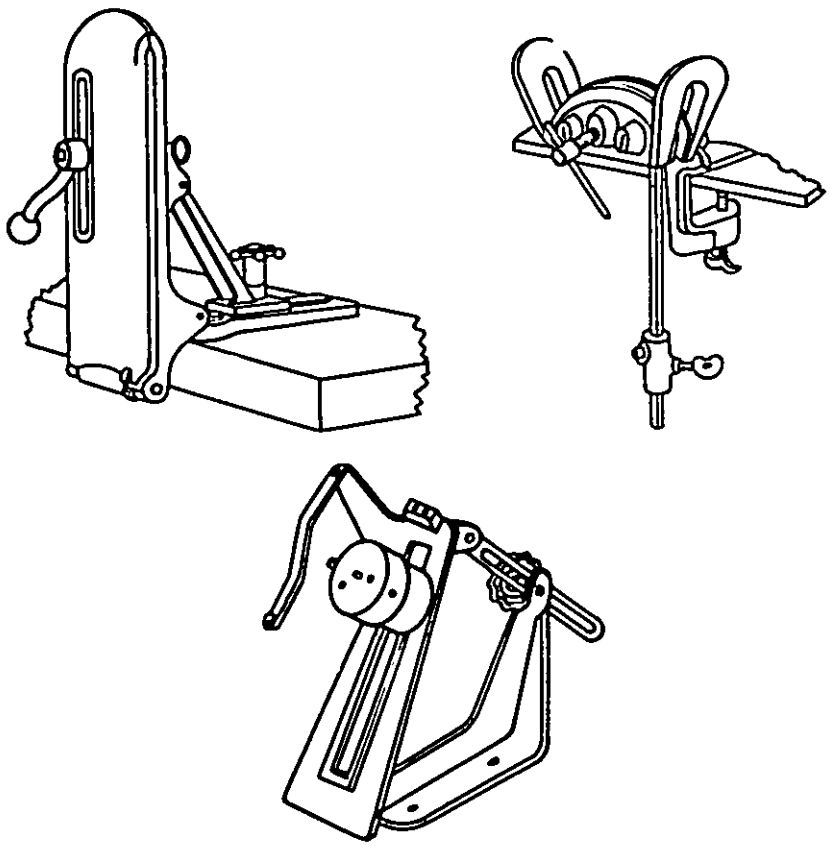


Figure 4. Type III, circular saw filing vise (alternate designs).

3.9 Workmanship. Workmanship shall be in accordance with the best grade of commercial practice covering this equipment. All parts shall be free from defects that may affect the serviceability or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL–STD–105. Data for sampling shall be as stated in table III.

TABLE III. Sampling data.

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	4.3.1
Dimensional and weight examination	do.	S–2	4.0	do.	4.3.2
Testing	do.	S–2	4.0	do.	4.4.1
Preparation for delivery	1 container	S–2	4.0	do.	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in material, design, finish, coating, construction, marking and workmanship.

4.3.2 Dimensional and weight examination. Each sample unit shall be examined for any nonconformance with dimensional and weight requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 Tension test. Each sample type III vise for which the physical requirements of the steel are specified in 3.8.5, shall be tested in accordance with method 211 of Fed. Test Method Std. No. 151.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table IV. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL–STD–105. Defects of closure listed shall be examined on shipping containers in the end item inspection lot.

TABLE IV. Classification of preparation for delivery defects.

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of containers.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing. Unless otherwise specified (see 6.1), the vises shall be preserved, packaged and packed in accordance with MIL–H–15424. The level of preservation and packaging shall be level A or C and the level of packing A, B, or C as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5.1.1 As part of the requirements of section 5 of this specification the following is considered as part of table I of MIL–H–15424:

COLUMN 1	COLUMN 2	COLUMN 3	COLUMN 4	COLUMN 5	COLUMN 6
Vise:					
Saw filing					
Handsaw					
Band saw					
Circular saw					
5 through 10 pounds	P–2, P–5	I	1		12
10 through 20 pounds	P–2, P–5	I	1		8
20 through 50 pounds	P–2, P–5	I	1		4
50 pounds and over	P–2, P–5	I	1		2

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to markings required by the contract or order, the interior packaging and shipping containers shall be marked in accordance with MIL–STD–129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class of vise required (see 1.2).
(c) Size, jaw width, or capacity required (see applicable tables).
(d) Selection of applicable levels of preservation, packaging, and packing required (see 5.1).

6.2 For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.1, level A packaging shall apply.

6.3 Supersession data. The classification of vises covered in this specification corresponding to those covered in GGG–V–436d are as follows:

GGG–V–436d	GGG–V–440a
Type XII.—Handsaw filing.	Type I.—Handsaw filing.
Class 1.—With filing guide.	Class 1.—With filing guide.
Class 2.—Without filing guide.	Class 2.—Without filing guide.
Type XIII.—Band saw filing.	Type II.—Band saw filing.
Type XIV.—Circular saw filing.	Type III.—Circular saw filing.

MILLITARY INTEREST:

Army—GL	Future coordination waived.
Navy—SH	Coordination waived.
Air Force—69	Coordination waived.

Preparing Activity:

GSA–FSS

U. S. Government Printing Office: 1967

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.