INCH-POUND
MIL-DTL-3786/28E
19 November 2004
SUPERSEDING
MIL-S-3786/28D
21 December 1982


DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, CLOSED CONSTRUCTION, 1 AMPERE AND LOW LEVEL,
STYLE SR28

Inactive for new design after 8 March 1999

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-3786.

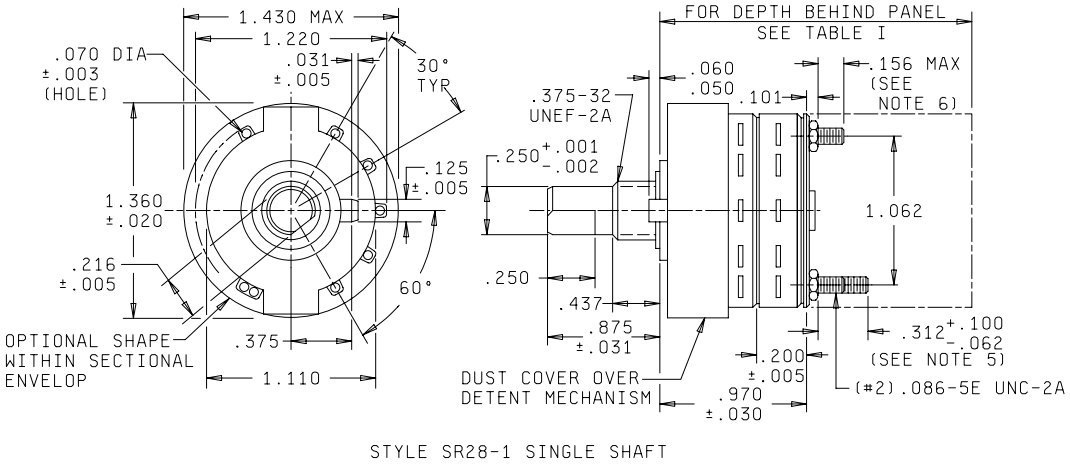


Style SR28-1 Single shaft

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance are ±.015 (0.38 mm) for three place decimals, ±3° on angles and fractions ± .015 (.38 mm).
4. Switches having more than 2.750 inch (69.85 mm) length from mounting surface are provided with through bolts extended .250 inch (6.35 mm) minimum beyond the nuts securing the last switch section at the rear of the switch to provide means to support the rear of the switch.
5. Dimensions to provide rear support for switches with eleven or more wafers.
6. Applied to switches having ten wafers or less.
7. Odd and even wafers are counted from shaft end (front) of switch.

FIGURE 1. Switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

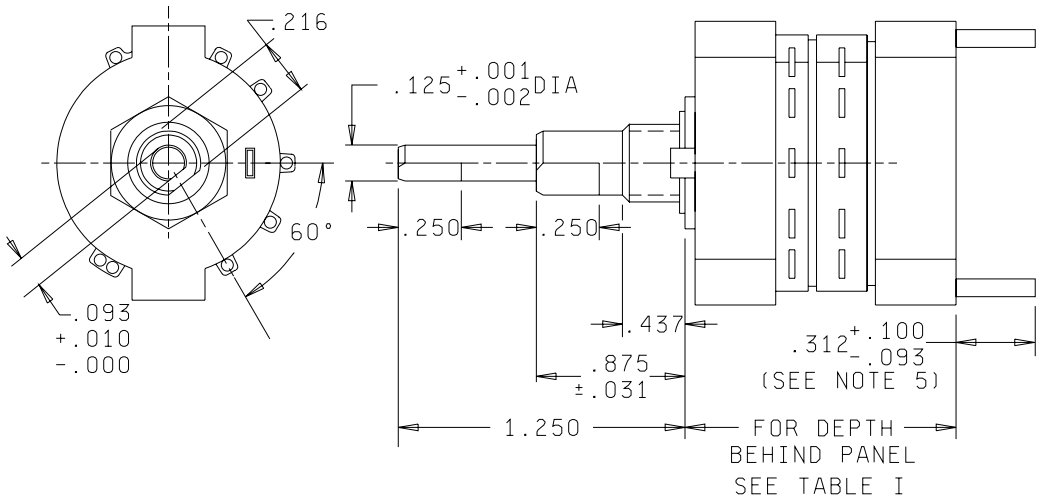


STYLE SR28-2 CONCENTRIC SHAFT

Style SR28-2 Concentric shaft

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance are ±.015 (0.38 mm) for three place decimals, ±3° on angles and fractions ± .015 (.38 mm).
4. Switches having more than 2.750 inch (69.85 mm) length from mounting surface are provided with through bolts extended .250 inch (6.35 mm) minimum beyond the nuts securing the last switch section at the rear of the switch to provide means to support the rear of the switch.
5. Dimensions to provide rear support for switches with eleven or more wafers.
6. Bushing keyway .066 (1.67 mm) ±.005 (.13 mm) wide by .036 (.91 mm). ±.003 (.08 mm) deep measured from a .375 (9.53 mm) diameter is provided for sealed shaft and bushing switches (construction symbol F).
7. For sealed shaft and bushing switches (construction symbol F), integral tab shall not be furnished.
8. Odd and even wafers are counted from shaft end (front) of switch.

FIGURE 1. Switch - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

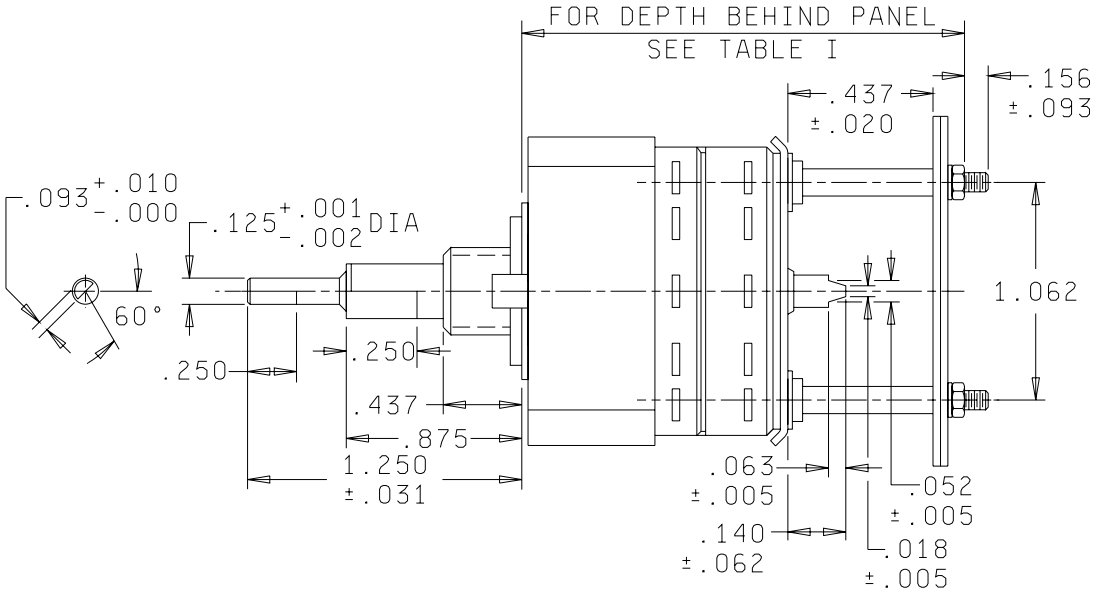

UNSPECIFIED DIMENSIONS SAME AS STYLE SR28-1 SINGLE SHAFT
STYLE SR28-3 ADD-A-PORT

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance are ±.015 (0.38 mm) for three place decimals, ±3° on angles, (non-accumulative).
4. Bushing keyway .066 (1.67 mm) ±.005 (.13 mm) wide by .036 (.91 mm). ±.003 (.08 mm) deep measured from a .375 (9.53 mm) diameter is provided for sealed shaft and bushing switches (construction symbol F).
5. For sealed shaft and bushing switches (construction symbol F), integral tab shall not be furnished.
6. RESISTOR MOUNTING PLATES: Two resistor mounting plates shall be made of corrosion resistant steel, and shall be of the configuration shown on figure 2. These plates are designed to allow alinement of switch position 1 with full counterclockwise stop of resistor (viewed from shaft end). Only one of the two plates provided with switch is to be used in adapting switch to resistor.
7. VARIABLE RESISTORS: Variable resistors shall be in accordance with the styles covered in MIL-PRF-94/3 or MIL-PRF-94/5with N (standard type bushings, and SL type operating shafts for MIL-PRF-94/3 SB type operating shafts for MIL-PRF-94/5.
8. Switches having more than 2.750 inch (69.85 mm) length from mounting surface are provided with through bolts extended .250 inch (6.35 mm) minimum beyond the nuts securing the last switch section at the rear of the switch to provide means to support the rear of the switch..

FIGURE 1. Switch - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

Decks 1/	Depth behind panel-inches, max.					
	SR28-1		SR28-2		SR28-3 2/	
1	.895	(22.73)	-----		1.635	(41.53)
2	1.100	(27.94)	1.605	(40.77)	1.840	(46.74)
3	1.305	(33.15)	1.810	(45.97)	2.045	(51.94)
4	1.510	(38.35)	2.015	(51.18)	2.250	(57.15)
5	1.715	(43.56)	2.220	(56.39)	2.455	(62.36)
6	1.920	(48.77)	2.425	(61.60)	2.660	67.56)
7	2.125	(53.98)	2.630	(66.80)	2.865	(72.77)
8	2.330	(59.18)	2.835	(72.01)	3.070	(77.98)
9	2.535	(64.39)	3.040	(77.22)	3.275	(83.19)
10	2.740	(69.60)	3.245	(82.42)	3.480	(88.39)
11	2.945	(74.80)	3.450	(87.23)	3.685	(93.60)
12	3.150	(80.01)	3.655	(92.84)	3.890	(98.81)
14	3.660	(90.42)	4.065	(103.25)	-----	
16	3.970	(100.84)	4.475	(113.67)	-----	
20	4.790	(121.67)	-----		-----	
22	5.200	(132.08)	-----		-----	
24	5.610	(142.49)	-----		-----	

1/ Total number of decks.
2/ As supplied with both mounting plates (figure 1); subtract .042 inch (1.07 mm) from dimension when one plate is removed.

FIGURE 1. Switch - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

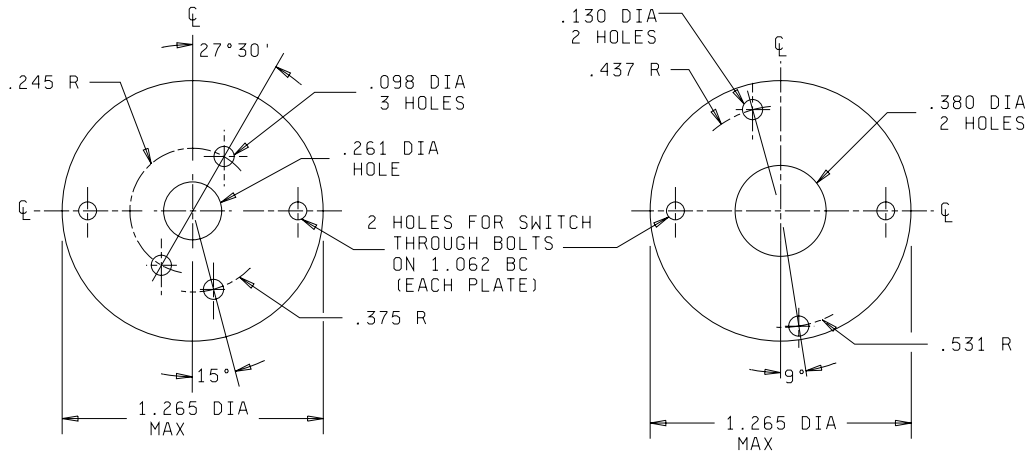

VARIABLE RESISTOR MOUNTING PLATE "A"
FOR USE WITH MIL-R-94/2 (RV5) AND
MIL-R-94/3 (RV6) RESISTORS


VARIABLE RESISTOR MOUNTING PLATE "B"
FOR USE WITH MIL-R-94/4 (RV2) AND
MIL-R-94/5 (RV4) RESISTORS

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm) and ±3° on angles.

FIGURE 2. Resistor mounting plates, for SR28-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

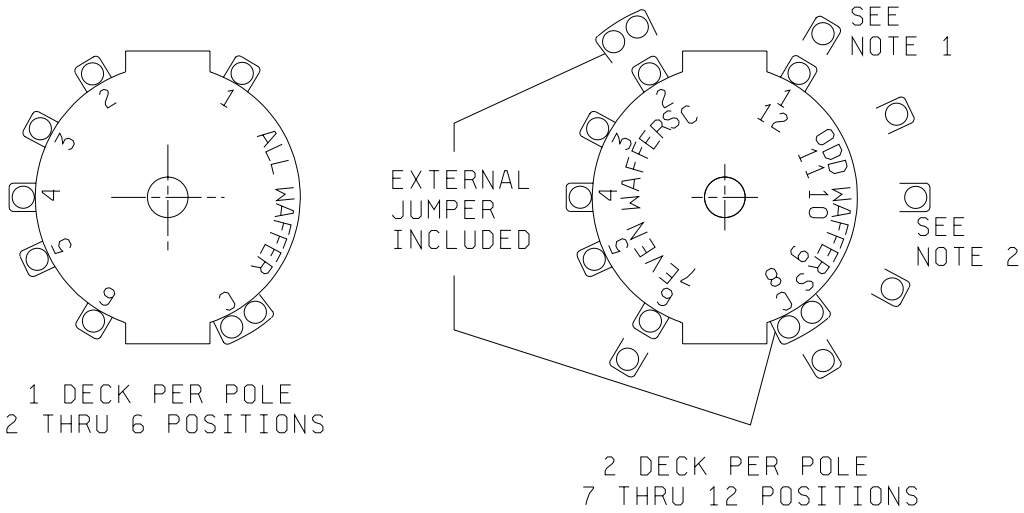

1/ Inner diagram shows terminal locations for odd number decks.
2/ Outer diagram shows terminal locations for even number decks.

FIGURE 3. Rear view of terminal configuration with nonturn device at nine o'clock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 3.

Angle of throw: 30 degrees.

Terminals: The terminal tabs shall extend from the section in a plane perpendicular to the axis of the switch.

Construction type: Symbol E. Explosion proof, totally closed construction, without sealed shaft and panel seal.

Symbol F. Same as E with sealed shaft and panel seal.

Insulation material: Symbol P: Plastic

Temperature-life characteristic: Symbol C. 25,000 cycles -65°C to +125°C.

Altitude: Symbol C. Up to 70,000 ft.

Contact resistance:

Initial and after vibration and shock: 10 milliohms, maximum.

After moisture-resistance and salt spray: 10 milliohms, maximum.

After initial soak and completion of life test: 15 milliohms, maximum

During thermal shock: 1 ohm maximum.

Low level circuit is applicable.

Rotational torque: See table I.

Vibration grade: Symbol 3. 10-2,000 Hz.

Shock type: Symbol M (medium impact) and H (high impact).

Dielectric withstanding voltage:

At atmospheric pressure: 1,000 V rms.

At reduced barometric pressure: 450 V rms, except 350 V rms after life.

Life (rotational): See table II.

Low level switching: Applicable; see note 2 of table II.

Special features: Symbol A. Both shaft grounding and EMI/RFI capability, and both high and low level contact load rating.

Mounting hardware: Each switch shall supplied with one each hexagon nut in accordance with MS25082-B20 or equivalent, and one internal-tooth lockwasher in accordance with NASM35333-76 or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE I. Rotational-torque limits. 1/

Total number of switch poles	Temperature	Torque (lb-in)	
		Minimum	Maximum
Less than 4	Room Minimum	.5 .5	2.5 3.5
4 thru 8	Room Minimum	1.2 1.2	4.5 6.0
More than 8	Room Minimum	2.5 2.5	7.5 9.0

1/ The rotational torque shall not change more than 40 percent from the initial value after rotational life testing.

TABLE II. Electrical loads.

Environmental condition	Inductive loads (2.8 H)		Resistive loads 1/	
	mA	V dc	mA	V dc
Elevated temperature 125°C: At atmospheric pressure	100	28	10 max 2/ 750 250	0.030 dc max or peak ac 2/ 28 dc 115 ac
Room temperature (25°C) At atmospheric pressure	100 3/	28 3/	1000 4/ 350 4/	28 dc 4/ 115 ac 4/
At reduced barometric pressure 25°C	40	28	250 40	28 dc 115 ac

1/ Each of the loads specified shall be switched by at least one rotor of the switch.
2/ Low level switching is applicable. Low level shall be conducted as one of the electrical loads tested during life (rotational) testing. The test circuit, power source, and monitoring apparatus shall be in accordance with method 311 of MIL-STD-202. Contact resistance shall not exceed 7.5 milliohms. At the beginning of the test and every 5,000 cycles thereafter, the contact resistance shall be measured.
3/ Reference only.
4/ Two sample units shall be tested using the load specified. Testing shall be performed the same as for other loads at atmospheric pressure, except the ambient temperature shall be room temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

Test samples to be used for qualification testing:

Qty	Part no.
5	M3786/28-0055
5	M3786/28-0132
5	M3786/28-1187
5	M3786/28-1264
2	M3786/28-2132
2	M3786/28-3132

Part number: See table IV. The military part number shall consist of the prefix M3786/28- and dash number consisting of four numbers sequentially assigned. The numbers fall into the general pattern outlined on table III:

TABLE III. Dash number identification.

Dash numbers	Style	Construction
0001-0264	SR28-1	E
1001-1264	SR28-1	F
2001-2264	SR28-2	E
3001-3264	SR28-2	F
4001-4132	SR28-3	E
5001-5132	SR28-3	F

TABLE IV. Switching characteristics and part numbers.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
0001	1001	30°	1	1	2	N
0002	1002	30°	1	1	3	N
0003	1003	30°	1	1	4	N
0004	1004	30°	1	1	5	N
0005	1005	30°	1	1	6 1/	N
0006	1006	30°	1	2	7	N
0007	1007	30°	1	2	8	N
0008	1008	30°	1	2	9	N
0009	1009	30°	1	2	10	N
0010	1010	30°	1	2	11	N
0011	1011	30°	1	2	12 2/	N
0012	1012	30°	2	2	2	N
0013	1013	30°	2	2	3	N
0014	1014	30°	2	2	4	N
0015	1015	30°	2	2	5	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
0016	1016	30°	2	2	6 1/	N
0017	1017	30°	2	4	7	N
0018	1018	30°	2	4	8	N
0019	1019	30°	2	4	9	N
0020	1020	30°	2	4	10	N
0021	1021	30°	2	4	11	N
0022	1022	30°	2	4	12 2/	N
0023	1023	30°	3	3	2	N
0024	1024	30°	3	3	3	N
0025	1025	30°	3	3	4	N
0026	1026	30°	3	3	5	N
0027	1027	30°	3	3	6 1/	N
0028	1028	30°	3	6	7	N
0029	1029	30°	3	6	8	N
0030	1030	30°	3	6	9	N
0031	1031	30°	3	6	10	N
0032	1032	30°	3	6	11	N
0033	1033	30°	3	6	12 2/	N
0034	1034	30°	4	4	2	N
0035	1035	30°	4	4	3	N
0036	1036	30°	4	4	4	N
0037	1037	30°	4	4	5	N
0038	1038	30°	4	4	6 1/	N
0039	1039	30°	4	8	7	N
0040	1040	30°	4	8	8	N
0041	1041	30°	4	8	9	N
0042	1042	30°	4	8	10	N
0043	1043	30°	4	8	11	N
0044	1044	30°	4	8	12 2/	N
0045	1045	30°	5	5	2	N
0046	1046	30°	5	5	3	N
0047	1047	30°	5	5	4	N
0048	1048	30°	5	5	5	N
0049	1049	30°	5	5	6 1/	N
0050	1050	30°	5	10	7	N
0051	1051	30°	5	10	8	N
0052	1052	30°	5	10	9	N
0053	1053	30°	5	10	10	N
0054	1054	30°	5	10	11	N
0055	1055	30°	5	10	12 2/	N
0056	1056	30°	6	6	2	N
0057	1057	30°	6	6	3	N
0057	1057	30°	6	6	3	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
0058	1058	30°	6	6	4	N
0059	1059	30°	6	6	5	N
0060	1060	30°	6	6	6 1/	N
0061	1061	30°	6	12	7	N
0062	1062	30°	6	12	8	N
0063	1063	30°	6	12	9	N
0064	1064	30°	6	12	10	N
0065	1065	30°	6	12	11	N
0066	1066	30°	6	12	12 2/	N
0067	1067	30°	7	7	2	N
0068	1068	30°	7	7	3	N
0069	1069	30°	7	7	4	N
0070	1070	30°	7	7	5	N
0071	1071	30°	7	7	6 1/	N
0072	1072	30°	7	14	7	N
0073	1073	30°	7	14	8	N
0074	1074	30°	7	14	9	N
0075	1075	30°	7	14	10	N
0076	1076	30°	7	14	11	N
0077	1077	30°	7	14	12 2/	N
0078	1078	30°	8	8	2	N
0079	1079	30°	8	8	3	N
0080	1080	30°	8	8	4	N
0081	1081	30°	8	8	5	N
0082	1082	30°	8	8	6 1/	N
0083	1083	30°	8	16	7	N
0084	1084	30°	8	16	8	N
0085	1085	30°	8	16	9	N
0086	1086	30°	8	16	10	N
0087	1087	30°	8	16	11	N
0088	1088	30°	8	16	12 2/	N
0089	1089	30°	9	9	2	N
0090	1090	30°	9	9	3	N
0091	1091	30°	9	9	4	N
0092	1092	30°	9	9	5	N
0093	1093	30°	9	9	6 1/	N
0094	1094	30°	9	18	7	N
0095	1095	30°	9	18	8	N
0096	1096	30°	9	18	9	N
0097	1097	30°	9	18	10	N
0098	1098	30°	9	18	11	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
0099	1099	30°	9	18	12 2/	N
0100	1100	30°	10	10	2	N
0101	1101	30°	10	10	3	N
0102	1102	30°	10	10	4	N
0103	1103	30°	10	10	5	N
0104	1104	30°	10	10	6 1/	N
0105	1105	30°	10	20	7	N
0106	1106	30°	10	20	8	N
0107	1107	30°	10	20	9	N
0108	1108	30°	10	20	10	N
0109	1109	30°	10	20	11	N
0110	1110	30°	10	20	12 2/	N
0111	1111	30°	11	11	2	N
0112	1112	30°	11	11	3	N
0113	1113	30°	11	11	4	N
0114	1114	30°	11	11	5	N
0115	1115	30°	11	11	6 1/	N
0116	1116	30°	11	22	7	N
0117	1117	30°	11	22	8	N
0118	1118	30°	11	22	9	N
0119	1119	30°	11	22	10	N
0120	1120	30°	11	22	11	N
0121	1121	30°	11	22	12 1/	N
0122	1122	30°	12	12	2	N
0123	1123	30°	12	12	3	N
0124	1124	30°	12	12	4	N
0125	1125	30°	12	12	5	N
0126	1126	30°	12	12	6 1/	N
0127	1127	30°	12	24	7	N
0128	1128	30°	12	24	8	N
0129	1129	30°	12	24	9	N
0130	1130	30°	12	24	10	N
0131	1131	30°	12	24	11	N
0132	1132	30°	12	24	6 1/	N
0133	1133	30°	1	1	2	S
0134	1134	30°	1	1	3	S
0135	1135	30°	1	1	4	S
0136	1136	30°	1	1	5	S
0137	1137	30°	1	1	6 1/	S
0138	1138	30°	1	2	7	S
0139	1139	30°	1	2	8	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
0140	1140	30°	1	2	9	S
0141	1141	30°	1	2	10	S
0142	1142	30°	1	2	11	S
0143	1143	30°	1	2	12 1/	S
0144	1144	30°	2	2	2	S
0145	1145	30°	2	2	3	S
0146	1146	30°	2	2	4	S
0147	1147	30°	2	2	5	S
0148	1148	30°	2	2	6 1/	S
0149	1149	30°	2	4	7	S
0150	1150	30°	2	4	8	S
0151	1151	30°	2	4	9	S
0152	1152	30°	2	4	10	S
0153	1153	30°	2	4	11	S
0154	1154	30°	2	4	12 1/	S
0155	1155	30°	3	3	2	S
0156	1156	30°	3	3	3	S
0157	1157	30°	3	3	4	S
0158	1158	30°	3	3	5	S
0159	1159	30°	3	3	6 1/	S
0160	1160	30°	3	6	7	S
0161	1161	30°	3	6	8	S
0162	1162	30°	3	6	9	S
0163	1163	30°	3	6	10	S
0164	1164	30°	3	6	11	S
0165	1165	30°	3	6	12 1/	S
0166	1166	30°	4	4	2	S
0167	1167	30°	4	4	3	S
0168	1168	30°	4	4	4	S
0169	1169	30°	4	4	5	S
0170	1170	30°	4	4	6 1/	S
0171	1171	30°	4	8	7	S
0172	1172	30°	4	8	8	S
0173	1173	30°	4	8	9	S
0174	1174	30°	4	8	10	S
0175	1175	30°	4	8	11	S
0176	1176	30°	4	8	12 1/	S
0177	1177	30°	5	5	2	S
0178	1178	30°	5	5	3	S
0179	1179	30°	5	5	4	S
0180	1180	30°	5	5	5	S
0181	1181	30°	5	5	6 1/	S
0182	1182	30°	5	10	7	S
0183	1183	30°	5	10	8	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
0184	1184	30°	5	10	9	S
0185	1185	30°	5	10	10	S
0186	1186	30°	5	10	11	S
0187	1187	30°	5	10	12 1/	S
0188	1188	30°	6	6	2	S
0189	1189	30°	6	6	3	S
0190	1190	30°	6	6	4	S
0191	1191	30°	6	6	5	S
0192	1192	30°	6	6	6 1/	S
0193	1193	30°	6	12	7	S
0194	1194	30°	6	12	8	S
0195	1195	30°	6	12	9	S
0196	1196	30°	6	12	10	S
0197	1197	30°	6	12	11	S
0198	1198	30°	6	12	12 1/	S
0199	1199	30°	7	7	2	S
0200	1200	30°	7	7	3	S
0201	1201	30°	7	7	4	S
0202	1202	30°	7	7	5	S
0203	1203	30°	7	7	6 1/	S
0204	1204	30°	7	14	7	S
0205	1205	30°	7	14	8	S
0206	1206	30°	7	14	9	S
0207	1207	30°	7	14	10	S
0208	1208	30°	7	14	11	S
0209	1209	30°	7	14	12 1/	S
0210	1210	30°	8	8	2	S
0211	1211	30°	8	8	3	S
0212	1212	30°	8	8	4	S
0213	1213	30°	8	8	5	S
0214	1214	30°	8	8	6 1/	S
0215	1215	30°	8	16	7	S
0216	1216	30°	8	16	8	S
0217	1217	30°	8	16	9	S
0218	1218	30°	8	16	10	S
0219	1219	30°	8	16	11	S
0220	1220	30°	8	16	12 1/	S
0221	1221	30°	9	9	2	S
0222	1222	30°	9	9	3	S
0223	1223	30°	9	9	4	S
0224	1224	30°	9	9	5	S
0225	1225	30°	9	9	6 1/	S
0226	1226	30°	9	18	7	S
0227	1227	30°	9	18	8	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
0228	1228	30°	9	18	9	S
0229	1229	30°	9	18	10	S
0230	1230	30°	9	18	11	S
0231	1231	30°	9	18	12 1/	S
0232	1232	30°	10	10	2	S
0233	1233	30°	10	10	3	S
0234	1234	30°	10	10	4	S
0235	1235	30°	10	10	5	S
0236	1236	30°	10	10	6 1/	S
0237	1237	30°	10	20	7	S
0238	1238	30°	10	20	8	S
0239	1239	30°	10	20	9	S
0240	1240	30°	10	20	10	S
0241	1241	30°	10	20	11	S
0242	1242	30°	10	20	12 1/	S
0243	1243	30°	11	11	2	S
0244	1244	30°	11	11	3	S
0245	1245	30°	11	11	4	S
0246	1246	30°	11	11	5	S
0247	1247	30°	11	11	6 1/	S
0248	1248	30°	11	22	7	S
0249	1249	30°	11	22	8	S
0250	1250	30°	11	22	9	S
0251	1251	30°	11	22	10	S
0252	1252	30°	11	22	11	S
0253	1253	30°	11	22	12 1/	S
0254	1254	30°	12	12	2	S
0255	1255	30°	12	12	3	S
0256	1256	30°	12	12	4	S
0257	1257	30°	12	12	5	S
0258	1258	30°	12	12	12 1/	S
0259	1259	30°	12	24	7	S
0260	1260	30°	12	24	8	S
0261	1261	30°	12	24	9	S
0262	1262	30°	12	24	10	S
0263	1263	30°	12	24	11	S
0264	1264	30°	12	24	12 1/	S

1/ May be used for all 2 to 6 position applications using field adjustable stops that are supplied.

2/ Continuous rotation-may be used for all 7 to 12 position applications using field adjustable stops that are supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-2	Part no. M3786/28- Construction: F Style SR28-2	Angle of throw	No. 1/ of poles	No. 1/ of decks	Pos. per pole	Switch Characteristic N or S
2001	3001	30°	1/1	1/1	2	N
2002	3002	30°	1/1	1/1	3	N
2003	3003	30°	1/1	1/1	4	N
2004	3004	30°	1/1	1/1	5	N
2005	3005	30°	1/1	1/1	6 2/	N
2006	3006	30°	1/1	2/2	7	N
2007	3007	30°	1/1	2/2	8	N
2008	3008	30°	1/1	2/2	9	N
2009	3009	30°	1/1	2/2	10	N
2010	3010	30°	1/1	2/2	11	N
2011	3011	30°	1/1	2/2	12 3/	N
2012	3012	30°	2/1	2/1	2	N
2013	3013	30°	2/1	2/1	3	N
2014	3014	30°	2/1	2/1	4	N
2015	3015	30°	2/1	2/1	5	N
2016	3016	30°	2/1	2/1	6 2/	N
2017	3017	30°	2/1	4/2	7	N
2018	3018	30°	2/1	4/2	8	N
2019	3019	30°	2/1	4/2	9	N
2020	3020	30°	2/1	4/2	10	N
2021	3021	30°	2/1	4/2	11	N
2022	3022	30°	2/1	4/2	12 3/	N
2023	3023	30°	3/1	3/1	2	N
2024	3024	30°	3/1	3/1	3	N
2025	3025	30°	3/1	3/1	4	N
2026	3026	30°	3/1	3/1	5	N
2027	3027	30°	3/1	3/1	6 2/	N
2028	3028	30°	3/1	6/2	7	N
2029	3029	30°	3/1	6/2	8	N
2030	3030	30°	3/1	6/2	9	N
2031	3031	30°	3/1	6/2	10	N
2032	3032	30°	3/1	6/2	11	N
2033	3033	30°	3/1	6/2	12 3/	N
2034	3034	30°	4/1	4/1	2	N
2035	3035	30°	4/1	4/1	3	N
2036	3036	30°	4/1	4/1	4	N
2037	3037	30°	4/1	4/1	5	N
2038	3038	30°	4/1	4/1	6 2/	N
2039	3039	30°	4/1	8/2	7	N
2040	3040	30°	4/1	8/2	8	N
2041	3041	30°	4/1	8/2	9	N
2042	3042	30°	4/1	8/2	10	N
2043	3043	30°	4/1	8/2	11	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2044	3044	30°	4/1	8/2	12 3/	N
2045	3045	30°	5/1	5/1	2	N
2046	3046	30°	5/1	5/1	3	N
2047	3047	30°	5/1	5/1	4	N
2048	3048	30°	5/1	5/1	5	N
2049	3049	30°	5/1	5/1	6 2/	N
2050	3050	30°	5/1	10/2	7	N
2051	3051	30°	5/1	10/2	8	N
2052	3052	30°	5/1	10/2	9	N
2053	3053	30°	5/1	10/2	10	N
2054	3054	30°	5/1	10/2	11	N
2055	3055	30°	5/1	10/2	12 3/	N
2056	3056	30°	6/1	6/1	2	N
2057	3057	30°	6/1	6/1	3	N
2058	3058	30°	6/1	6/1	4	N
2059	3059	30°	6/1	6/1	5	N
2060	3060	30°	6/1	6/1	6 2/	N
2061	3061	30°	6/1	12/2	7	N
2062	3062	30°	6/1	12/2	8	N
2063	3063	30°	6/1	12/2	9	N
2064	3064	30°	6/1	12/2	10	N
2065	3065	30°	6/1	12/2	11	N
2066	3066	30°	6/1	12/2	12 3/	N
2067	3067	30°	1/2	1/2	2	N
2068	3068	30°	1/2	1/2	3	N
2069	3069	30°	1/2	1/2	4	N
2070	3070	30°	1/2	1/2	5	N
2071	3071	30°	1/2	1/2	6 2/	N
2072	3072	30°	1/2	2/4	7	N
2073	3073	30°	1/2	2/4	8	N
2074	3074	30°	1/2	2/4	9	N
2075	3075	30°	1/2	2/4	10	N
2076	3076	30°	1/2	2/4	11	N
2077	3077	30°	1/2	2/4	12 3/	N
2078	3078	30°	2/2	2/2	2	N
2079	3079	30°	2/2	2/2	3	N
2080	3080	30°	2/2	2/2	4	N
2081	3081	30°	2/2	2/2	5	N
2082	3082	30°	2/2	2/2	6 2/	N
2083	3083	30°	2/2	4/4	7	N
2084	3084	30°	2/2	4/4	8	N
2085	3085	30°	2/2	4/4	9	N
2086	3086	30°	2/2	4/4	10	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2087	3087	30°	2/2	4/4	11	N
2088	3088	30°	2/2	4/4	12 3/	N
2089	3089	30°	3/2	3/2	2	N
2090	3090	30°	3/2	3/2	3	N
2091	3091	30°	3/2	3/2	4	N
2092	3092	30°	3/2	3/2	5	N
2093	3093	30°	3/2	3/2	6 2/	N
2094	3094	30°	3/2	6/4	7	N
2095	3095	30°	3/2	6/4	8	N
2096	3096	30°	3/2	6/4	9	N
2097	3097	30°	3/2	6/4	10	N
2098	3098	30°	3/2	6/4	11	N
2099	3099	30°	3/2	6/4	12 3/	N
2100	3100	30°	4/2	4/2	2	N
2101	3101	30°	4/2	4/2	3	N
2102	3102	30°	4/2	4/2	4	N
2103	3103	30°	4/2	4/2	5	N
2104	3104	30°	4/2	4/2	6 2/	N
2105	3105	30°	4/2	8/4	7	N
2106	3106	30°	4/2	8/4	8	N
2107	3107	30°	4/2	8/4	9	N
2108	3108	30°	4/2	8/4	10	N
2109	3109	30°	4/2	8/4	11	N
2110	3110	30°	4/2	8/4	12 3/	N
2111	3111	30°	5/2	5/2	2	N
2112	3112	30°	5/2	5/2	3	N
2113	3113	30°	5/2	5/2	4	N
2114	3114	30°	5/2	5/2	5	N
2115	3115	30°	5/2	5/2	6 2/	N
2116	3116	30°	5/2	10/4	7	N
2117	3117	30°	5/2	10/4	8	N
2118	3118	30°	5/2	10/4	9	N
2119	3119	30°	5/2	10/4	10	N
2120	3120	30°	5/2	10/4	11	N
2121	3121	30°	5/2	10/4	12 3/	N
2122	3122	30°	6/2	6/2	2	N
2123	3123	30°	6/2	6/2	3	N
2124	3124	30°	6/2	6/2	4	N
2125	3125	30°	6/2	6/2	5	N
2126	3126	30°	6/2	6/2	6 2/	N
2127	3127	30°	6/2	12/4	7	N
2128	3128	30°	6/2	12/4	8	N
2129	3129	30°	6/2	12/4	9	N
2130	3130	30°	6/2	12/4	10	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2131	3131	30°	6/2	12/4	11	N
2132	3132	30°	6/2	12/4	12 3/	N
2133	3133	30°	1/1	1/1	2	S
2134	3134	30°	1/1	1/1	3	S
2135	3135	30°	1/1	1/1	4	S
2136	3136	30°	1/1	1/1	5	S
2137	3137	30°	1/1	1/1	6 2/	S
2138	3138	30°	1/1	2/2	7	S
2139	3139	30°	1/1	2/2	8	S
2140	3140	30°	1/1	2/2	9	S
2141	3141	30°	1/1	2/2	10	S
2142	3142	30°	1/1	2/2	11	S
2143	3143	30°	1/1	2/2	12 3/	S
2144	3144	30°	2/1	2/1	2	S
2145	3145	30°	2/1	2/1	3	S
2146	3146	30°	2/1	2/1	4	S
2147	3147	30°	2/1	2/1	5	S
2148	3148	30°	2/1	2/1	6 2/	S
2149	3149	30°	2/1	4/2	7	S
2150	3150	30°	2/1	4/2	8	S
2151	3151	30°	2/1	4/2	9	S
2152	3152	30°	2/1	4/2	10	S
2153	3153	30°	2/1	4/2	11	S
2154	3154	30°	2/1	4/2	12 3/	S
2155	3155	30°	3/1	3/1	2	S
2156	3156	30°	3/1	3/1	3	S
2157	3157	30°	3/1	3/1	4	S
2158	3158	30°	3/1	3/1	5	S
2159	3159	30°	3/1	3/1	6 2/	S
2160	3160	30°	3/1	6/2	7	S
2161	3161	30°	3/1	6/2	8	S
2162	3162	30°	3/1	6/2	9	S
2163	3163	30°	3/1	6/2	10	S
2164	3164	30°	3/1	6/2	11	S
2165	3165	30°	3/1	6/2	12 3/	S
2166	3166	30°	4/1	4/1	2	S
2167	3167	30°	4/1	4/1	3	S
2168	3168	30°	4/1	4/1	4	S
2169	3169	30°	4/1	4/1	5	S
2170	3170	30°	4/1	4/1	6 2/	S
2171	3171	30°	4/1	8/2	7	S
2172	3172	30°	4/1	8/2	8	S
2173	3173	30°	4/1	8/2	9	S
2174	3174	30°	4/1	8/2	10	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2175	3175	30°	4/1	8/2	11	S
2176	3176	30°	4/1	8/2	12 3/	S
2177	3177	30°	5/1	5/1	2	S
2178	3178	30°	5/1	5/1	3	S
2179	3179	30°	5/1	5/1	4	S
2180	3180	30°	5/1	5/1	5	S
2181	3181	30°	5/1	5/1	6 2/	S
2182	3182	30°	5/1	10/2	7	S
2183	3183	30°	5/1	10/2	8	S
2184	3184	30°	5/1	10/2	9	S
2185	3185	30°	5/1	10/2	10	S
2186	3186	30°	5/1	10/2	11	S
2187	3187	30°	5/1	10/2	12 3/	S
2188	3188	30°	6/1	6/1	2	S
2189	3189	30°	6/1	6/1	3	S
2190	3190	30°	6/1	6/1	4	S
2191	3191	30°	6/1	6/1	5	S
2192	3192	30°	6/1	6/1	6 2/	S
2193	3193	30°	6/1	12/2	7	S
2194	3194	30°	6/1	12/2	8	S
2195	3195	30°	6/1	12/2	9	S
2196	3196	30°	6/1	12/2	10	S
2197	3197	30°	6/1	12/2	11	S
2198	3198	30°	6/1	12/2	12 3/	S
2199	2199	30°	1/2	1/2	2	S
2200	3200	30°	1/2	1/2	3	S
2201	3201	30°	1/2	1/2	4	S
2202	3202	30°	1/2	1/2	5	S
2203	3203	30°	1/2	1/2	6 2/	S
2204	3204	30°	1/2	2/4	7	S
2205	3205	30°	1/2	2/4	8	S
2206	3206	30°	1/2	2/4	9	S
2207	3207	30°	1/2	2/4	10	S
2208	3208	30°	1/2	2/4	11	S
2209	3209	30°	1/2	2/4	12 3/	S
2210	3210	30°	2/2	2/2	2	S
2211	3211	30°	2/2	2/2	3	S
2212	3212	30°	2/2	2/2	4	S
2213	3213	30°	2/2	2/2	5	S
2214	3214	30°	2/2	2/2	6 2/	S
2215	3215	30°	2/2	4/4	7	S
2216	3216	30°	2/2	4/4	8	S
2217	3217	30°	2/2	4/4	9	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2218	3218	30°	2/2	4/4	10	S
2219	3219	30°	2/2	4/4	11	S
2220	3220	30°	2/2	4/4	12 3/	S
2221	3221	30°	3/2	3/2	2	S
2222	3222	30°	3/2	3/2	3	S
2223	3223	30°	3/2	3/2	4	S
2224	3224	30°	3/2	3/2	5	S
2225	3225	30°	3/2	3/2	6 2/	S
2226	3226	30°	3/2	6/4	7	S
2227	3227	30°	3/2	6/4	8	S
2228	3228	30°	3/2	6/4	9	S
2229	3229	30°	3/2	6/4	10	S
2230	3230	30°	3/2	6/4	11	S
2231	3231	30°	3/2	6/4	12 3/	S
2232	3232	30°	4/2	4/2	2	S
2233	3233	30°	4/2	4/2	3	S
2234	3234	30°	4/2	4/2	4	S
2235	3235	30°	4/2	4/2	5	S
2236	3236	30°	4/2	4/2	6 2/	S
2237	3237	30°	4/2	8/4	7	S
2238	3238	30°	4/2	8/4	8	S
2239	3239	30°	4/2	8/4	9	S
2240	3240	30°	4/2	8/4	10	S
2241	3241	30°	4/2	8/4	11	S
2242	3242	30°	4/2	8/4	12 3/	S
2243	3243	30°	5/2	5/2	2	S
2244	3244	30°	5/2	5/2	3	S
2245	3245	30°	5/2	5/2	4	S
2246	3246	30°	5/2	5/2	5	S
2247	3247	30°	5/2	5/2	6 2/	S
2248	3248	30°	5/2	10/4	7	S
2249	3249	30°	5/2	10/4	8	S
2250	3250	30°	5/2	10/4	9	S
2251	3251	30°	5/2	5/2	10	S
2252	3252	30°	5/2	5/2	11	S
2253	3253	30°	5/2	5/2	12 3/	S
2254	3254	30°	6/2	6/2	2	S
2255	3255	30°	6/2	6/2	3	S
2256	3256	30°	6/2	6/2	4	S
2257	3257	30°	6/2	6/2	5	S
2258	3258	30°	6/2	6/2	6 2/	S
2259	3259	30°	6/2	12/4	7	S
2260	3260	30°	6/2	12/4	8	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-1	Part no. M3786/28- Construction: F Style SR28-1	Angle Of throw	No. of poles	No. of decks	Pos. Per pole	Switch Characteristic N or S
2261	3261	30°	6/2	12/4	9	S
2262	3262	30°	6/2	12/4	10	S
2263	3263	30°	6/2	12/4	11	S
2264	3264	30°	6/2	12/4	12 3/	S

1/ First number is for front switch (.250 shaft); second number is for rear switch (.125 shaft).
2/ May be used for all 2 to 6 position applications using field adjustable stops that are supplied.
3/ Continuous rotation-may be used for all 7 to 12 position applications using field adjustable stops that are supplied.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-3	Part no. M3786/28- Construction: F Style SR28-3	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
4001	5001	30°	1	1	2	N
4002	5002	30°	1	1	3	N
4003	5003	30°	1	1	4	N
4004	5004	30°	1	1	5	N
4005	5005	30°	1	1	6 1/	N
4006	5006	30°	1	2	7	N
4007	5007	30°	1	2	8	N
4008	5008	30°	1	2	9	N
4009	5009	30°	1	2	10	N
4010	5010	30°	1	2	11	N
4011	5011	30°	1	2	12 2/	N
4012	5012	30°	2	2	2	N
4013	5013	30°	2	2	3	N
4014	5014	30°	2	2	4	N
4015	5015	30°	2	2	5	N
4016	5016	30°	2	2	6 1/	N
4017	5017	30°	2	4	7	N
4018	5018	30°	2	4	8	N
4019	5019	30°	2	4	9	N
4020	5020	30°	2	4	10	N
4021	5021	30°	2	4	11	N
4022	5022	30°	2	4	12 2/	N
4023	5023	30°	3	3	2	N
4024	5024	30°	3	3	3	N
4025	5025	30°	3	3	4	N
4026	5026	30°	3	3	5	N
4027	5027	30°	3	3	6 1/	N
4028	5028	30°	3	6	7	N
4029	5029	30°	3	6	8	N
4030	5030	30°	3	6	9	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-3	Part no. M3786/28- Construction: F Style SR28-3	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
4031	5031	30°	3	6	10	N
4032	5032	30°	3	6	11	N
4033	5033	30°	3	6	12 2/	N
4034	5034	30°	4	4	2	N
4035	5035	30°	4	4	3	N
4036	5036	30°	4	4	4	N
4037	5037	30°	4	4	5	N
4038	5038	30°	4	4	6 1/	N
4039	5039	30°	4	8	7	N
4040	5040	30°	4	8	8	N
4041	5041	30°	4	8	9	N
4042	5042	30°	4	8	10	N
4043	5043	30°	4	8	11	N
4044	5044	30°	4	8	12 2/	N
4045	5045	30°	5	5	2	N
4046	5046	30°	5	5	3	N
4047	5047	30°	5	5	4	N
4048	5048	30°	5	5	5	N
4049	5049	30°	5	5	6 1/	N
4050	5050	30°	5	10	7	N
4051	5051	30°	5	10	8	N
4052	5052	30°	5	10	9	N
4053	5053	30°	5	10	10	N
4054	5054	30°	5	10	11	N
4055	5055	30°	5	10	12 2/	N
4056	5056	30°	6	6	2	N
4057	5057	30°	6	6	3	N
4058	5058	30°	6	6	4	N
4059	5059	30°	6	6	5	N
4060	5060	30°	6	6	6 1/	N
4061	5061	30°	6	12	7	N
4062	5062	30°	6	12	8	N
4063	5063	30°	6	12	9	N
4064	5064	30°	6	12	10	N
4065	5065	30°	6	12	11	N
4066	5066	30°	6	12	12 2/	N
4067	5067	30°	1	1	2	S
4068	5068	30°	1	1	3	S
4069	5069	30°	1	1	4	S
4070	5070	30°	1	1	5	S
4071	5071	30°	1	1	6 1/	S
4072	5072	30°	1	2	7	S
4073	5073	30°	1	2	8	S
4074	5074	30°	1	2	9	S
4075	5075	30°	1	2	10	S
4076	5076	30°	1	2	11	S
4077	5077	30°	1	2	12 2/	S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-3	Part no. M3786/28- Construction: F Style SR28-3	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
4078	5078	30°	2	2	2	S
4079	5079	30°	2	2	3	S
4080	5080	30°	2	2	4	S
4081	5081	30°	2	2	5	S
4082	5082	30°	2	2	6 1/	S
4083	5083	30°	2	4	7	S
4084	5084	30°	2	4	8	S
4085	5085	30°	2	4	9	S
4086	5086	30°	2	4	10	S
4087	5087	30°	2	4	11	S
4088	5088	30°	2	4	12 2/	S
4089	5089	30°	3	3	2	S
4090	5090	30°	3	3	3	S
4091	5091	30°	3	3	4	S
4092	5092	30°	3	3	5	S
4093	5093	30°	3	3	6 1/	S
4094	5094	30°	3	6	7	S
4095	5095	30°	3	6	8	S
4096	5096	30°	3	6	9	S
4097	5097	30°	3	6	10	S
4098	5098	30°	3	6	11	S
4099	5099	30°	3	6	12 2/	S
4100	5100	30°	4	4	2	S
4101	5101	30°	4	4	3	S
4102	5102	30°	4	4	4	S
4103	5103	30°	4	4	5	S
4104	5104	30°	4	4	6 1/	S
4105	5105	30°	4	8	7	S
4106	5106	30°	4	8	8	S
4107	5107	30°	4	8	9	S
4108	5108	30°	4	8	10	S
4109	5109	30°	4	8	11	S
4110	5110	30°	4	8	12 2/	S
4111	5111	30°	5	5	2	S
4112	5112	30°	5	5	3	S
4113	5113	30°	5	5	4	S
4114	5114	30°	5	5	5	S
4115	5115	30°	5	5	6 1/	S
4116	5116	30°	5	10	7	S
4117	5117	30°	5	10	8	S
4118	5118	30°	5	10	9	S
4119	5119	30°	5	10	10	S
4120	5120	30°	5	10	11	S
4121	5121	30°	5	10	12 2/	S
4122	5122	30°	6	6	2	S
4123	5123	30°	6	6	3	S
4124	5124	30°	6	6	4	S

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Switching characteristics and part numbers - Continued.

Part no. M3786/28- Construction: E Style SR28-3	Part no. M3786/28- Construction: F Style SR28-3	Angle of throw	No. of poles	No. of decks	Pos. per pole	Switch Characteristic N or S
See footnotes at end of table.						
4125	5125	30°	6	6	5	S
4126	5126	30°	6	6	6 1/	S
4127	5127	30°	6	12	7	S
4128	5128	30°	6	12	8	S
4129	5129	30°	6	12	9	S
4130	5130	30°	6	12	10	S
4131	5131	30°	6	12	11	S
4132	5132	30°	6	12	12 2/	S

1/ May be used for all 2 to 6 position applications using field adjustable stops that are supplied.

2/ Continuous rotation-may be used for all 7 to 12 position applications using field adjustable stops that are supplied.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced Documents:

MIL-DTL-3786
MIL-PRF-94/3
MIL-PRF-94/5
MS25082
NASM35333
MIL-STD-202

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5930-1868)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:38Z
Check the source to verify that this is the current version before use.