INCH-POUND

MIL-S-3786/35E
AMENDMENT 1
25 April 1997


MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, CLOSED CONSTRUCTION, EXPLOSION PROOF, FLUX SEAL AND NON-FLUX SEAL, .200 AMPERE, STYLE SR35

This amendment forms a part of MIL-S-3786/35E, dated 28 September 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, add slotted shaft configuration, remove and replace printed circuit configuration reference line for dimension "A":

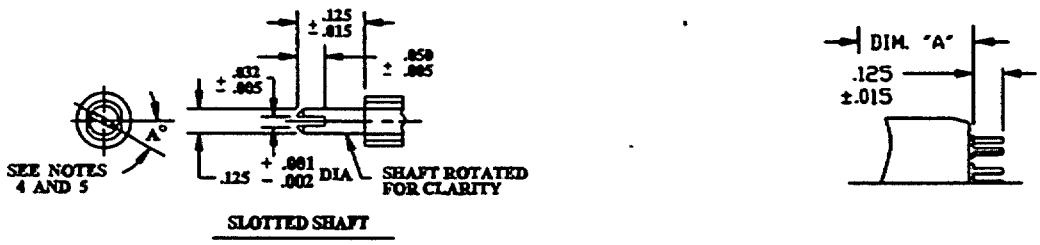

PAGE 3

Notes, after note 3, delete and substitute the following:

"4. Shaft flat angle A° is the angle between a line through the center of the shaft perpendicular to the mounting bushing flats and another line through the center of the shaft and perpendicular to the shaft flat with switch in position number one. For switches with a slotted shaft, the slot is in line with the point of contact for pole number one.

5. Position number one and terminal number one coincide. "

PAGE 4

After the Moisture resistance requirement and related lines of text, add the following two, new requirements:

"Low level: Applicable when specified in the Part or Identifying Number (PIN).

Shaft grounding: Applicable when specified in the PIN. "

Stop strength, delete and substitute: "Stop strength: Stops shall withstand a force of 7.5 pound-inches."

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.

TABLE II, delete and substitute:

TABLE II. Electrical loads.

Environmental condition	Lamp load (tungsten)		Inductive load (140 millihenries ± 20 %)		Resistive load	
	Milliamperes	Volts dc	Milliamperes	Volts dc	Milliamperes	Volts
At atmospheric pressure	100	28	30	28	200	28 dc
					75	115 V rms 60 Hz
At reduced barometric pressure	—	—	—	—	200	28 dc
					75	115 V rms 60 Hz

Military PIN, example A, delete and substitute:

"Example A: Non-flux sealed switches:

M3786/35 - 001 T G L

Switching characteristics (see table III) _____

Add the letter "T" when a slotted shaft is required _____

Add the letter "G" if positive shaft grounding is required _____

Add the letter "L" for low level requirement _____

NOTE: M3786/35-001TGL identifies a nonflux-sealed rotary switch of construction style F, 30° angle of throw, one pole per deck, 2 through 12 positions per pole, adjustable stops, solder lug termination, nonshorting switching characteristics, slotted shaft with low level capabilities and a grounded shaft. "

Military PIN, example B, delete and substitute:

"Example B: Flux sealed switches:

M3786/35 - A G AF

Switching characteristics and type of stops (see table IV) _____

Type construction, low level capability, shaft grounding, and shock type (see table V) _____

Angle of throw, poles per deck, and number of positions per pole (see table VI) _____

PIN M3786/35-AGAF identifies a rotary switch with fixed stops, nonshorting switching characteristics, a flatted shaft, printed circuit terminals, that is explosion proof, flux proof, closed construction, without sealed shaft and panel seal, 30° angle of throw, 1 pole per deck, 7 positions per pole and has low level switching capabilities with a grounded shaft."

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.

TABLE IV, delete and substitute:

" TABLE IV. Switching characteristics.

Code letter	Switching characteristics	Type of stops	Shaft type
A	Nonshorting	Fixed	Flatted
B	Shorting	Adjustable	Flatted
C	Nonshorting	Adjustable	Flatted
D	Shorting	Fixed	Flatted
E	Nonshorting	Fixed	Slotted
F	Shorting	Adjustable	Slotted
G	Nonshorting	Adjustable	Slotted
H	Shorting	Fixed	Slotted

TABLE V, delete and substitute:

" TABLE V. Code letter for type construction, low level capability, shaft grounding, and type of termination. 1/

Code letter	Type construction	Low level capability	Shaft grounding	Type termination
A	J	No	No	Printed circuit
B	K	No	No	Printed circuit
C	J	No	No	Solder lug
D	K	No	No	Solder lug
E	J	Yes	No	Printed circuit
F	J	Yes	No	Solder lug
G	J	Yes	Yes	Printed circuit
H	J	Yes	Yes	Solder lug
J	J	No	Yes	Printed circuit
K	J	No	Yes	Solder lug
L	K	Yes	No	Printed circuit
M	K	Yes	No	Solder lug
N	K	Yes	Yes	Printed circuit
P	K	Yes	Yes	Solder lug
R	K	No	Yes	Printed circuit
T	K	No	Yes	Solder lug

1/ Applicable to J and K constructions only. "

Table VI, add the following code letters:

Code letter	Angle of throw	Poles per deck	Number of pos
BE	30	1	Adjustable
BF	30	2	Adjustable
BG	30	3	Adjustable
BH	30	4	Adjustable

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, AV, ME, MI, SM
Navy - AS, CG, MC, OS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5930-1604)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.