MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, CLOSED CONSTRUCTION, 1/4 AMPERE
STYLE SR36

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-3786.

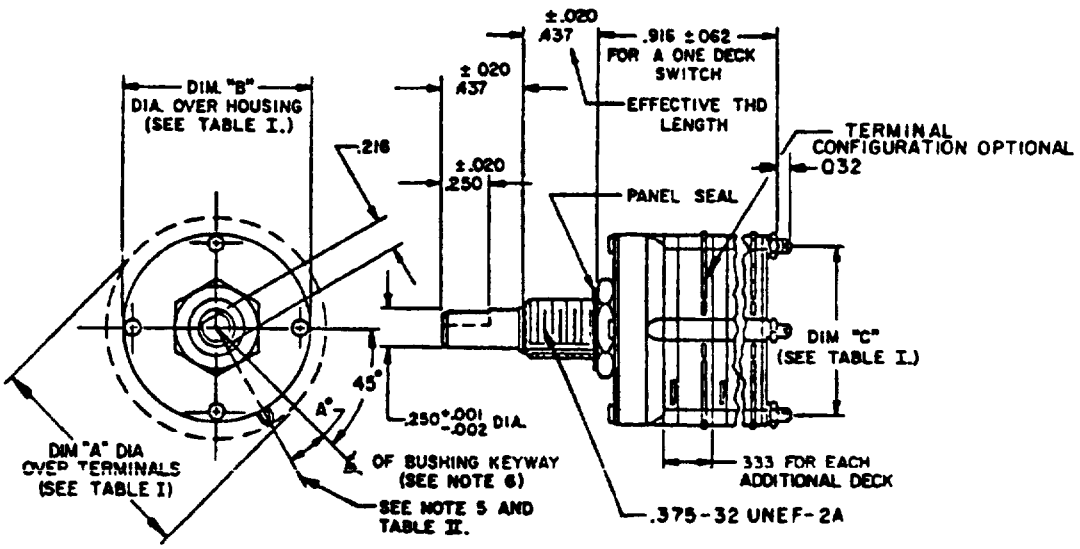


TABLE I.

ANGLE OF THROW	DIM. "A"	DIM. "B"	DIM. "C"
15°	1.350	1.281	1.156
18°, 22 1/2°	1.190	1.125	1.000


INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.062	1.57	.375	9.53	1.125	28.58
.002	.05	.216	5.49	.437	11.10	1.156	29.36
.020	.51	.250	6.35	.916	23.27	1.190	30.23
.032	.81	.333	8.50	1.000	25.40	1.281	32.54
						1.350	34.29

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015(.38 mm) and ±3° on angles (non-accumulative).
4. Maximum weight: One deck switch is 50 grams. Add 10 maximum grams for each additional deck based upon 1 oz. = 28.35 grams.
5. Shaft-flat angle A is the angle between a line through the center of the shaft and center of the bushing keyway, and another line through the center of the shaft and perpendicular to the shaft flat, with switch in Position Number 1 This refers to panel position See Figure 2 for terminal location.
6. Bushing keyway .069(1.75 mm) ± .005(.13 mm) wide by .036(.91 mm) ±.003(.08 mm) deep measured from a .375(9.53 mm) diameter
7. Intergal tab shall not be furnished.

FIGURE 1. Style SR36 switch.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

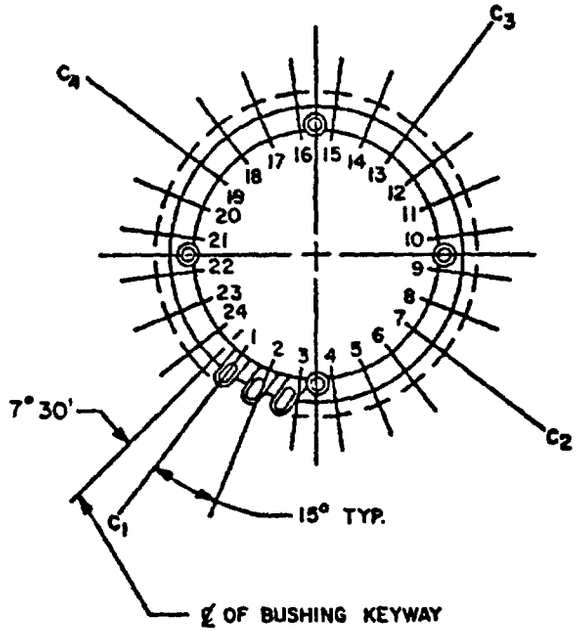

EXAMPLE

Switch viewed from rear. (C_1, C_2, etc. represents common terminal location. Typical for all terminal configuration layouts.)

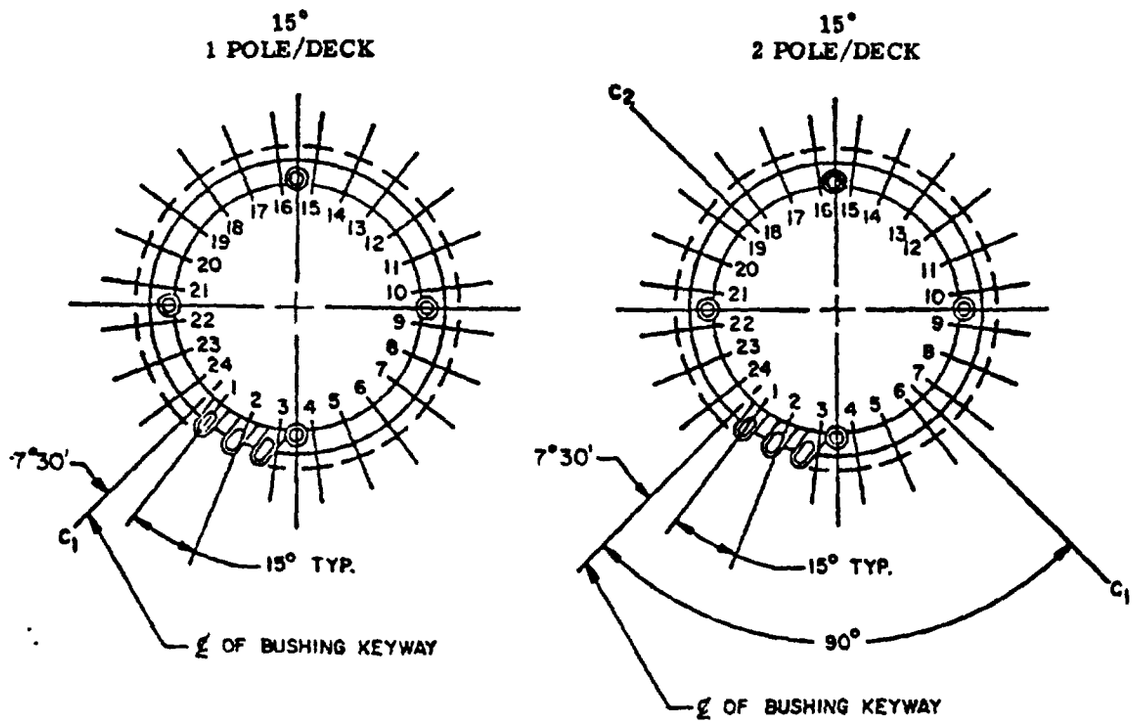


FIGURE 2. Rear view of terminal configurations.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

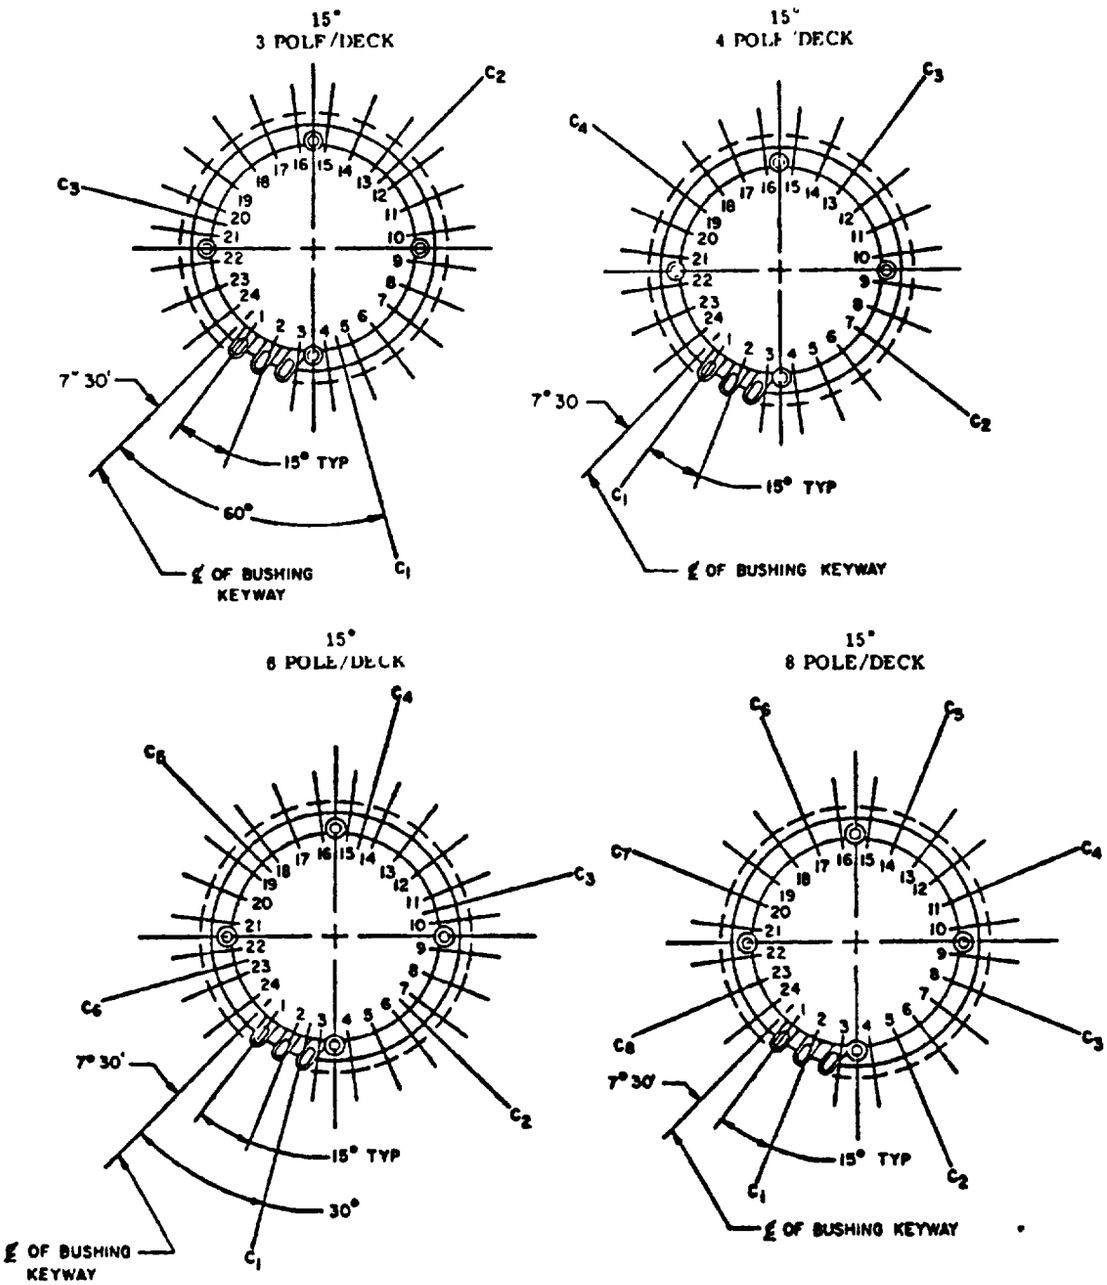


FIGURE 2 Rear view of terminal configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

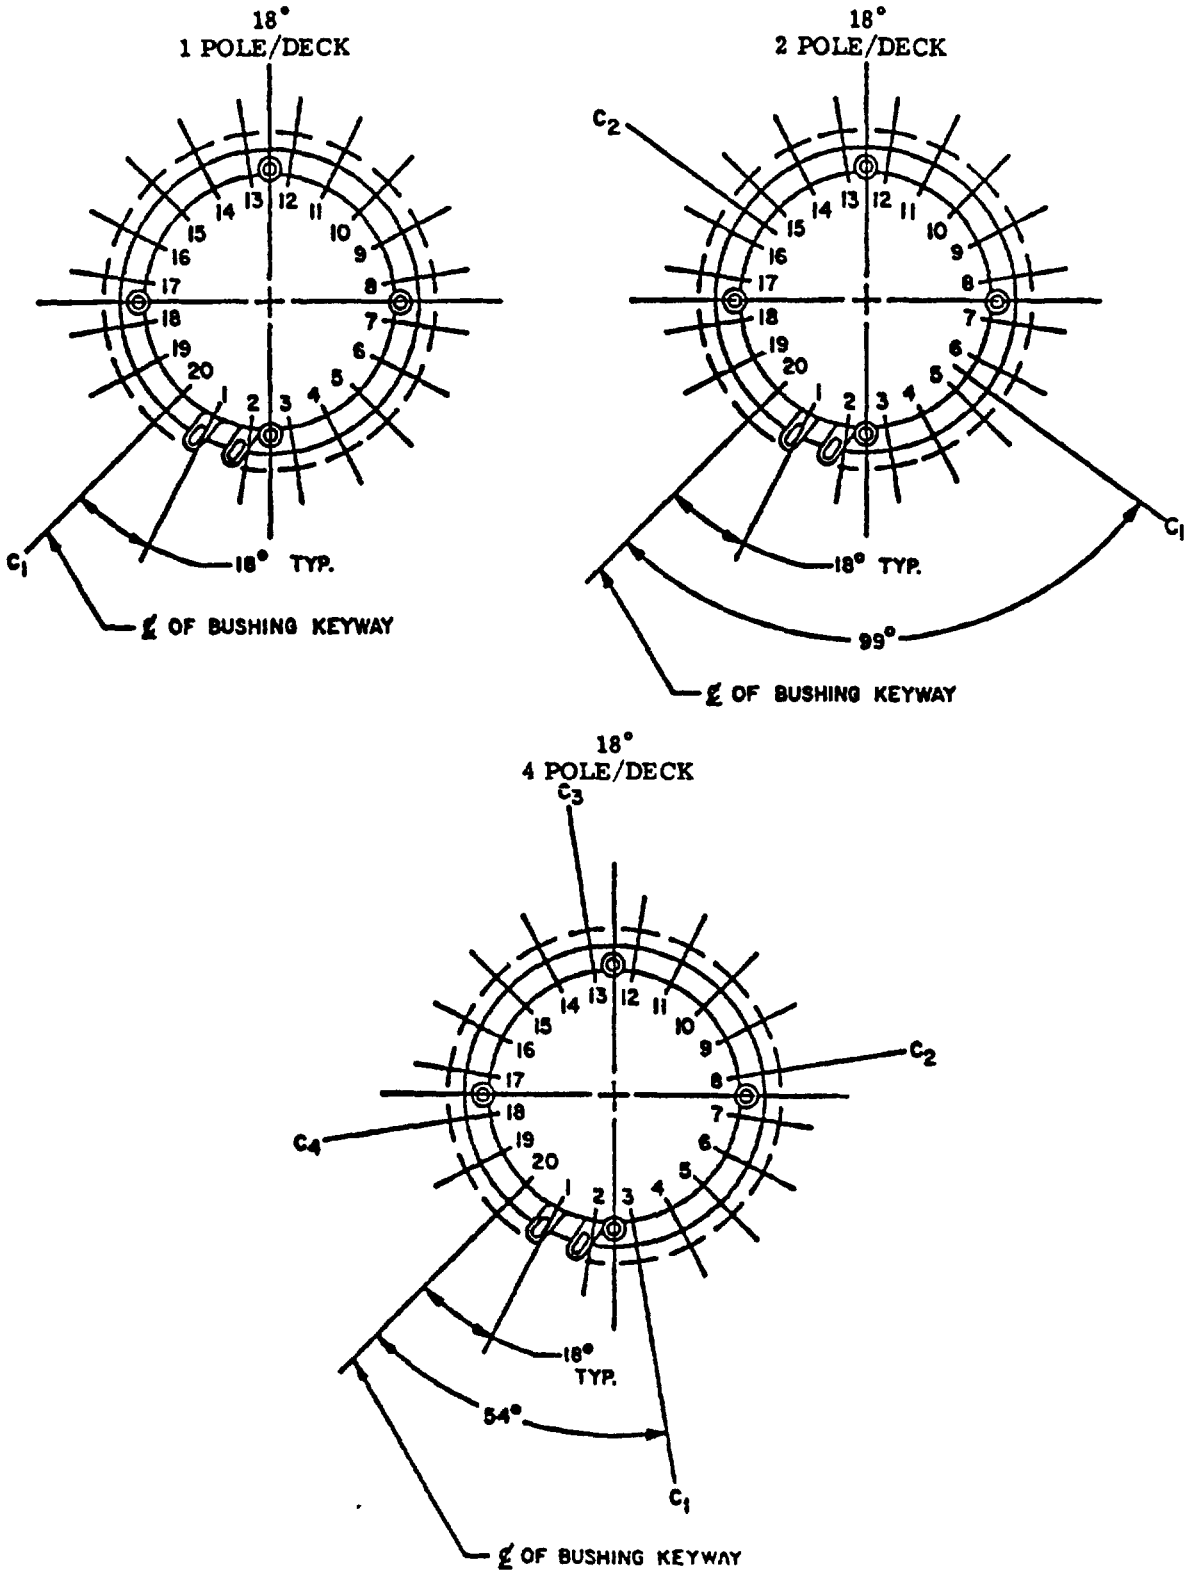


FIGURE 2. Rear view of terminal configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

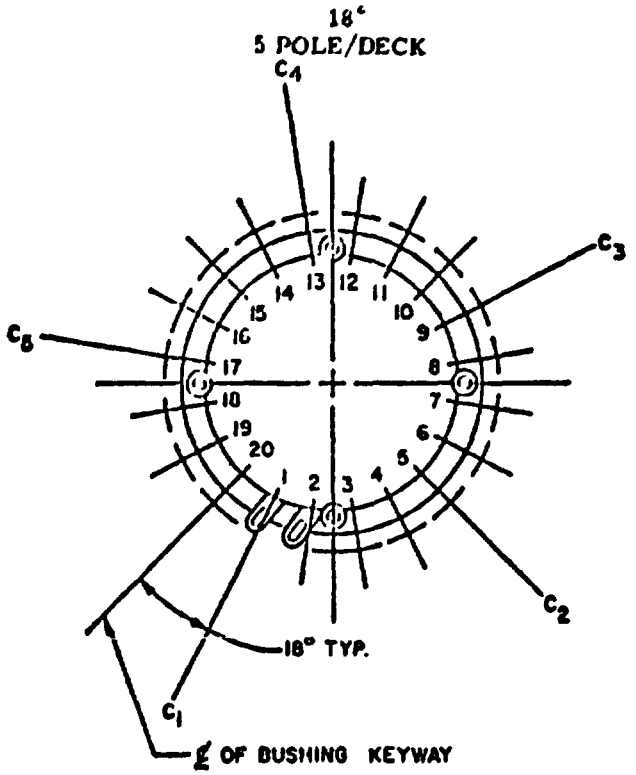


FIGURE 2. Rear view of terminal configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.


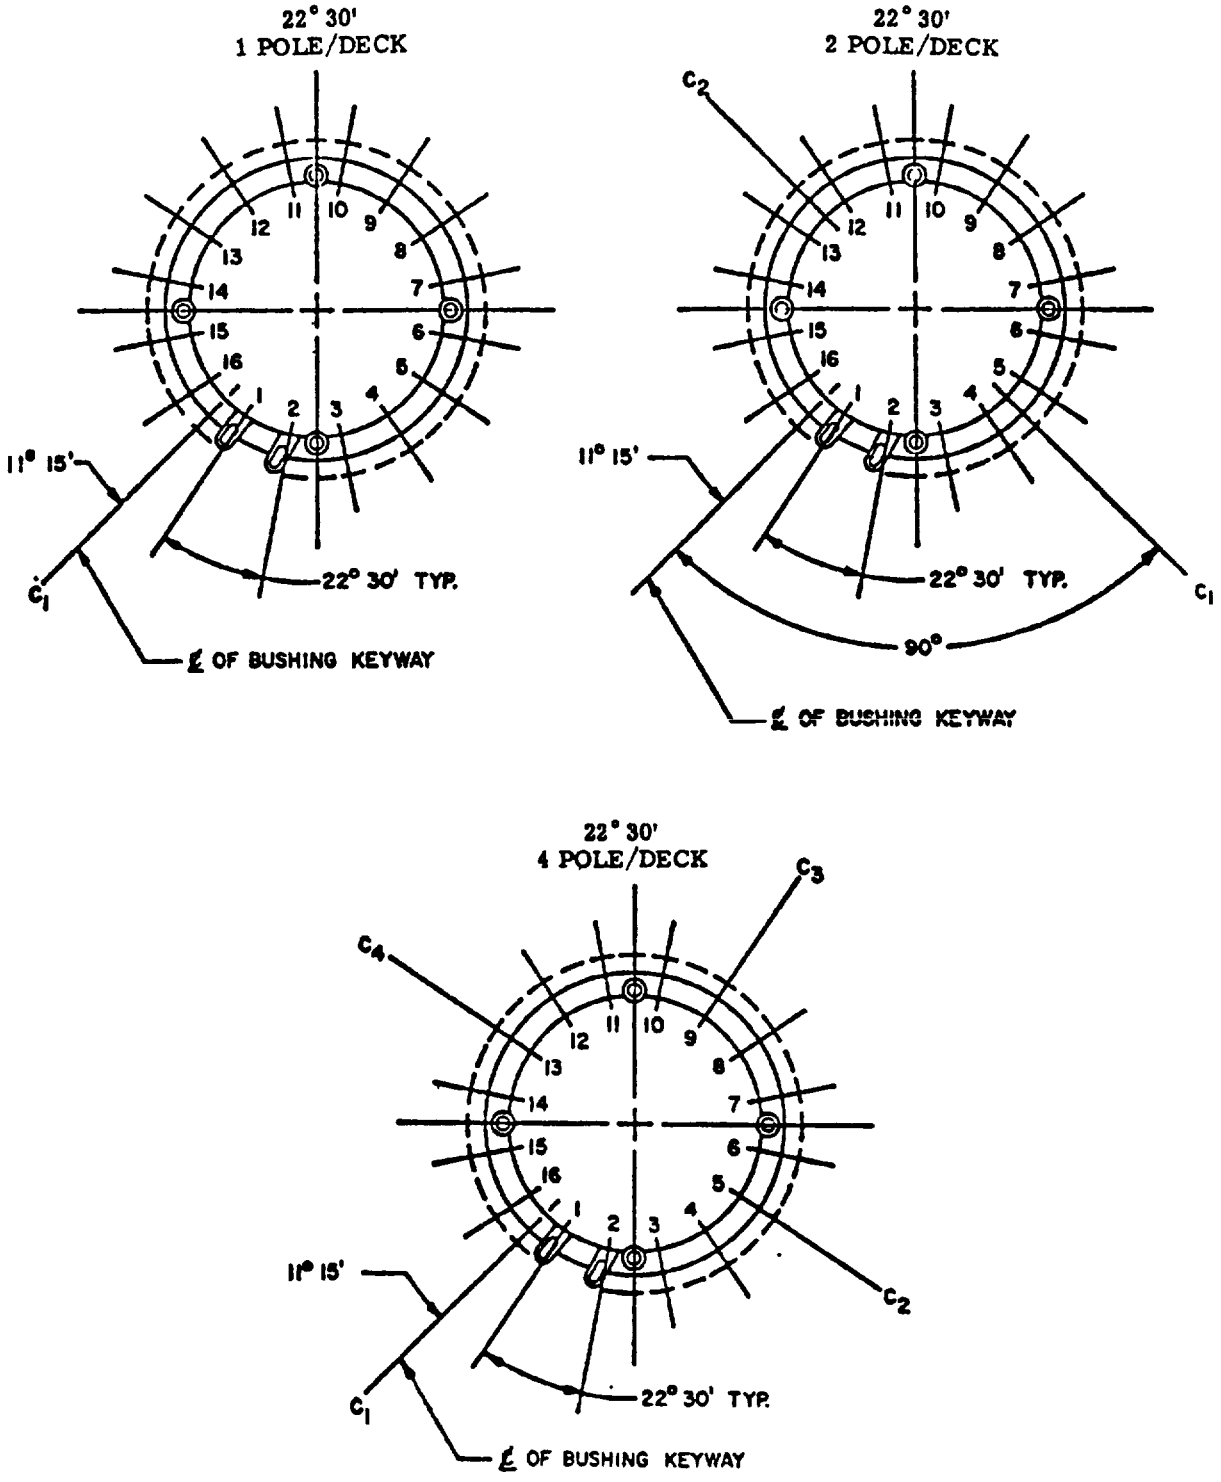


FIGURE 2 Rear view of terminal configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

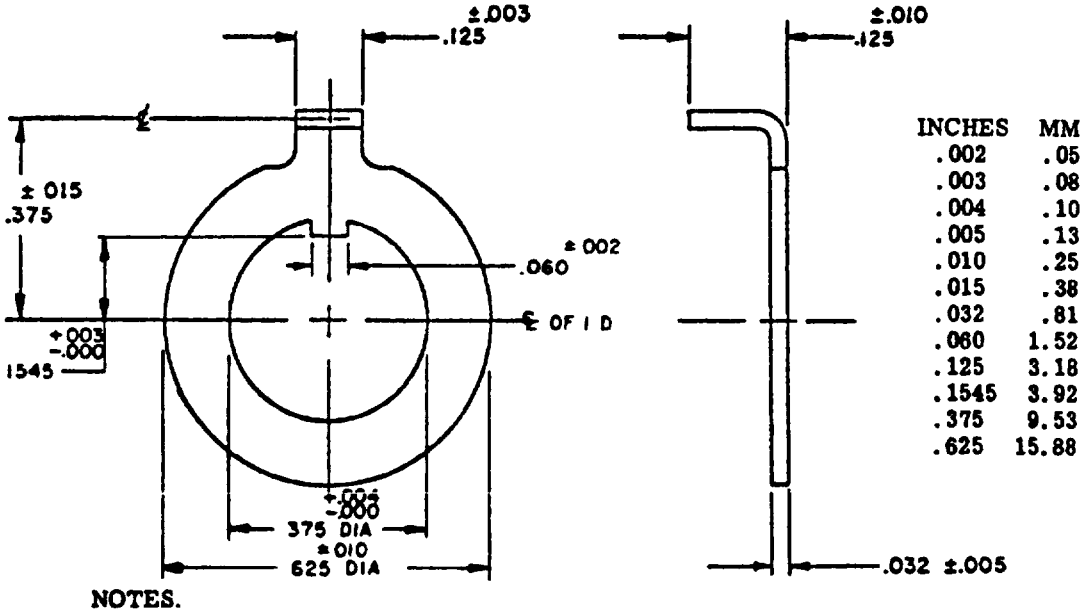

NOTES.
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 3. Non-turn washer configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Maximum number of poles per deck:

15° - - - - 8 poles
18° - - - - 5 poles
22° 30' - - 4 poles

TABLE II. Values for angle A.

Angle of throw	Angle A
15°	7° 30'
18°	18°
22° 30'	11° 15'

Construction: F.

Insulation material: Symbol P.

Temperature-life characteristic: C.

Vibration grade: Symbol 3 (10 to 2,000 Hz).

Shock type: Symbol H (high impact) and
Symbol M (medium impact).

Altitude: Symbol C (70,000 ft.).

Mounting hardware: Switch shall be supplied with two mounting nuts in accordance with MS25082-20, one lockwasher in accordance with MS35333-42 and one non-turn washer (see figure 3).

Terminal strength (pull): A force of 2 pounds shall be applied to the terminals. Terminal bend test applicable.

Moisture resistance: Insulation resistance, measured immediately after conclusion of the moisture resistance test and while the switches are still in the humidity chamber, shall be not less than .5 megohm. At the end of the drying period, the insulation resistance shall be not less than 10 megohms.

Stop strength: Stops shall be set in a clockwise direction from position number one, when viewed from shaft end. Stops, when supplied, shall withstand a 15 pound-inch torque.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

Rotational torque: The minimum and maximum values of torque determined for shaft rotation shall be within the limits specified in table III.

TABLE III. Rotational-torque limits.

Total number of switch poles	Temperature	Torque (lb.-in.)	
		Minimum	Maximum
Less than 6	Room Minimum	.5 .5	2.5 3.0
6 or more	Room Minimum	1.2 1.2	4.5 5.0

Life (rotational). The test loads for the applicable circuit conditions shall be as specified in table IV. Each of the loads specified for the applicable environmental condition shall be switched by at least one (1) rotor contact of the switch.

TABLE IV. Circuit values for life (rotational) test.

Environmental condition	Inductive loads (250 millihenries)		Resistive loads	
	Milli-amperes	Volts dc	Milli-amperes	Volts
At 70,000 ft. altitude (25,000 cycles)	10	28	50	28 dc
			20	115 Vrms 60 Hz
At atmospheric pressure and 125° C (25,000 cycles)	25	28	75	26 dc
			25	115 Vrms 60 Hz
At atmospheric pressure and room temperature (Approx. 25° C) (10,000 cycles) 1/ 2/	75	28	250	28 dc
			150	115 Vrms 60 Hz

1/ 3 additional samples will be run for qualification. Switch to be tested shall be part number M3786/36-0230.

2/ The contact resistance (applicable to ac and dc) after life test shall not exceed 50 milliohms.

Dielectric withstanding voltage: The applicable voltage specified in table V shall be applied.

TABLE V. Dielectric-test voltages.

Altitude	Test voltage (Volts, rms)
At atmospheric pressure	500
At reduced barometric pressure	350

Ordering data: Procurement documents should specify the following:

(a) Title, number, and date of this specification sheet, and military part number as listed in table VI.
(b) For switches not listed in table VI, procurement shall be in accordance with the ordering data of MIL-S-3786 (for switches covered by specification sheets).

Part number: M3786/## (dash number from table VI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers.

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0001	15°	1	1	2	NS
0002				3	
0003				4	
0004				5	
0005				6	
0006				7	
0007				8	
0008				9	
0009				10	
0010				11	
0011				12	
0012				13	
0013				14	
0014				15	
0015				16	
0016				17	
0017				18	
0018				19	
0019				20	
0020				21	
0021				22	
0022				23	
0023				24 1/	
0024			↓	24	
0025			2	2	
0026				3	
0027				4	
0028				5	
0029				6	
0030				7	
0031				8	
0032				9	
0033				10	
0034				11	
0035			↓	12	
0036			3	2	
0037				3	
0038				4	
0039				5	
0040				6	
0041				7	
0042			↓	8	
0043			4	2	
0044				3	
0045				4	
0046				5	
0047			↓	6	
0048			6	2	
0049				3	
0050	↓	↓	↓	4	↓

1/ See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0051	15°	1	8	2	NS
0052		1	8	3	
0053		2	1	2	
0054				3	
0055				4	
0056				5	
0057				6	
0058				7	
0059				8	
0060				9	
0061				10	
0062				11	
0063				12	
0064				13	
0065				14	
0066				15	
0067				16	
0068				17	
0069				18	
0070				19	
0071				20	
0072				21	
0073				22	
0074				23	
0075				24 1/	
0076			↓	24	
0077			2	2	
0078				3	
0079				4	
0080				5	
0081				6	
0082				7	
0083				8	
0084				9	
0085				10	
0086				11	
0087			↓	12	
0088			3	2	
0089				3	
0090				4	
0091				5	
0092				6	
0093				7	
0094			↓	8	
0095			4	2	
0096				3	
0097				4	
0098				5	
0099	↓	↓	↓	6	↓

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0100	15°	2	6	2	NS
0101				3	
0102				4	
0103			8	2	
0104				3	
0105		3	1	2	
0106				3	
0107				4	
0108				5	
0109				6	
0110				7	
0111				8	
0112				9	
0113				10	
0114				11	
0115				12	
0116				13	
0117				14	
0118				15	
0119				16	
0120				17	
0121				18	
0122				19	
0123				20	
0124				21	
0125				22	
0126				23	
0127				24 1/	
0128				24	
0129			2	2	
0130				3	
0131				4	
0132				5	
0133				6	
0134				7	
0135				8	
0136				9	
0137				10	
0138				11	
0139				12	
0140			3	2	
0141				3	
0142				4	
0143				5	
0144				6	
0145				7	
0146				8	
0147			4	2	
0148				3	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0149	15°	3	4	4	NS
0150				5	
0151				6	
0152			6	2	
0153				3	
0154				4	
0155			8	2	
0156				3	
0157		4	1	2	
0158				3	
0159				4	
0160				5	
0161				6	
0162				7	
0163				8	
0164				9	
0165				10	
0166				11	
0167				12	
0168				13	
0169				14	
0170				15	
0171				16	
0172				17	
0173				18	
0174				19	
0175				20	
0176				21	
0177				22	
0178				23	
0179				24 1/	
0180				24	
0181			2	2	
0182				3	
0183				4	
0184				5	
0185				6	
0186				7	
0187				8	
0188				9	
0189				10	
0190				11	
0191				12	
0192			3	2	
0193				3	
0194				4	
0195				5	
0196				6	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0197	15°	4	3	7	NS
0198				8	
0199			4	2	
0200				3	
0201				4	
0202				5	
0203				6	
0204			6	?	
0205				3	
0206				4	
0207		5	1	2	
0208				3	
0209				4	
0210				5	
0211				6	
0212				7	
0213				8	
0214				9	
0215				10	
0216				11	
0217				12	
0218				13	
0219				14	
0220				15	
0221				16	
0222				17	
0223				18	
0224				19	
0225				20	
0226				21	
0227				22	
0228				23	
0229				24 1/	
0230				24	
0231			2	2	
0232				3	
0233				4	
0234				5	
0235				6	
0236				7	
0237				8	
0238				9	
0239				10	
0240				11	
0241				12	
0242			3	2	
0243				3	
0244				4	
0245				5	

1/ See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0246	15°	5	3	6	NS
0247				7	
0248				8	
0249			4	2	
0250				3	
0251				4	
0252				5	
0253				6	
0254		1	1	2	S
0255				3	
0256				4	
0257				5	
0258				6	
0259				7	
0260				8	
0261				9	
0262				10	
0263				11	
0264				12	
0265				13	
0266				14	
0267				15	
0268				16	
0269				17	
0270				18	
0271				19	
0272				20	
0273				21	
0274				22	
0275				23	
0276				24 1/	
0277				24	
0278			2	2	
0279				3	
0280				4	
0281				5	
0282				6	
0283				7	
0284				8	
0285				9	
0286				10	
0287				11	
0288				12	
0289			3	2	
0290				3	
0291				4	
0292				5	
0293				6	
0294				7	
0295				8	

1/ See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0296	15°	1	4	2	S
0297				3	
0298				4	
0299				5	
0300				6	
0301			6	2	
0302				3	
0303				4	
0304			8	2	
0305				3	
0306		2	1	2	
0307				3	
0308				4	
0309				5	
0310				6	
0311				7	
0312				8	
0313				9	
0314				10	
0315				11	
0316				12	
0317				13	
0318				14	
0319				15	
0320				16	
0321				17	
0322				18	
0323				19	
0324				20	
0325				21	
0326				22	
0327				23	
0328				24 1/	
0329			2	24	
0330				2	
0331				3	
0332				4	
0333				5	
0334				6	
0335				7	
0336				8	
0337				9	
0338				10	
0339				11	
0340				12	
0341			3	2	
0342				3	
0343				4	
0344				5	

1/ See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:40Z
Check the source to verify that this is the currentversion before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0345	15°	2	3	6	S
0346				7	
0347				8	
0348			4	2	
0349				3	
0350				4	
0351				5	
0352				6	
0353			6	2	
0354				3	
0355				4	
0356			8	2	
0357				3	
0358		3	1	2	
0359				3	
0360				4	
0361				5	
0362				6	
0363				7	
0364				8	
0365				9	
0366				10	
0367				11	
0368				12	
0369				13	
0370				14	
0371				15	
0372				16	
0373				17	
0374				18	
0375				19	
0376				20	
0377				21	
0378				22	
0379				23	
0380				24 1/	
0381				24	
0382			2	2	
0383				3	
0384				4	
0385				5	
0386				6	
0387				7	
0388				8	
0389				9	
0390				10	
0391				11	
0392				12	
0393			3	2	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0394	15°	3	3	3	S
0395				4	
0396				5	
0397				6	
0398				7	
0399				8	
0400			4	2	
0401				3	
0402				4	
0403				5	
0404				6	
0405			6	2	
0406				3	
0407				4	
0408			8	2	
0409				3	
0410		4	1	2	
0411				3	
0412				4	
0413				5	
0414				6	
0415				7	
0416				8	
0417				9	
0418				10	
0419				11	
0420				12	
0421				13	
0422				14	
0423				15	
0424				16	
0425				17	
0426				18	
0427				19	
0428				20	
0429				21	
0430				22	
0431				23	
0432				24 1/	
0433				24	
0434			2	2	
0435				3	
0436				4	
0437				5	
0438				6	
0439				7	
0440				8	
0441				9	
0442				10	
0443				11	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0444	15°	4	2	12	S
0445			3	2	
0446				3	
0447				4	
0448				5	
0449				6	
0450				7	
0451				8	
0452			4	2	
0453				3	
0454				4	
0455				5	
0456				6	
0457			6	2	
0458				3	
0459				4	
0460		5	1	2	
0461				3	
0462				4	
0463				5	
0464				6	
0465				7	
0466				8	
0467				9	
0468				10	
0469				11	
0470				12	
0471				13	
0472				14	
0473				15	
0474				16	
0475				17	
0476				18	
0477				19	
0478				20	
0479				21	
0480				22	
0481				23	
0482				24 1/	
0483				24	
0484			2	2	
0485				3	
0486				4	
0487				5	

1/ See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0488	15°	5	2	6	S
0489				7	
0490				8	
0491				9	
0492				10	
0493				11	
0494				12	
0495			3	2	
0496				3	
0497				4	
0498				5	
0499				6	
0500				7	
0501				8	
0502			4	2	
0503				3	
0504				4	
0505				5	
0506				6	
0507	18°	1	1	2	NS
0508				3	
0509				4	
0510				5	
0511				6	
0512				7	
0513				8	
0514				9	
0515				10	
0516				11	
0517				12	
0518				13	
0519				14	
0520				15	
0521				16	
0522				17	
0523				18	
0524				19	
0525				20 1/	
0526				20	
0527			2	2	
0528				3	
0529				4	
0530				5	
0531				6	

1 See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0532	18°	1	2	7	NS
0533				8	
0534				9	
0535				10	
0536			4	2	
0537				3	
0538				4	
0539				5	
0540			5	2	
0541				3	
0542				4	
0543		2	1	2	
0544				3	
0545				4	
0546				5	
0547				6	
0548				7	
0549				8	
0550				9	
0551				10	
0552				11	
0553				12	
0554				13	
0555				14	
0556				15	
0557				16	
0558				17	
0559				18	
0560				19	
0561				20 1/	
0562				20	
0563			2	2	
0564				3	
0565				4	
0566				5	
0567				6	
0568				7	
0569				8	
0570				9	
0571				10	
0572			4	2	
0573				3	
0574				4	
0575				5	
0576			5	2	
0577				3	
0578				4	
0579		3	1	2	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0580	18°	3	1	3	NS
0581				4	
0582				5	
0583				6	
0584				7	
0585				8	
0586				9	
0587				10	
0588				11	
0589				12	
0590				13	
0591				14	
0592				15	
0593				16	
0594				17	
0595				18	
0596				19	
0597				20 1/	
0598			↓	20	
0599			2	2	
0600				3	
0601				4	
0602				5	
0603				6	
0604				7	
0605				8	
0606				9	
0607			↓	10	
0608			4	2	
0609				3	
0610				4	
0611			↓	5	
0612			5	2	
0613				3	
0614		↓	↓	4	
0615		4	1	2	
0616				3	
0617				4	
0618				5	
0619				6	
0620				7	
0621				8	
0622				9	
0623				10	
0624				11	
0625				12	
0626				13	
0627				14	
0628				15	
0629	↓	↓	↓	16	↓

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the currentversion before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0630	18°	4	1	17	NS
0631				18	
0632				19	
0633				20 1/	
0634				20	
0635			2	2	
0636				3	
0637				4	
0638				5	
0639				6	
0640				7	
0641				8	
0642				9	
0643				10	
0644			4	2	
0645				3	
0646				4	
0647				5	
0648			5	2	
0649				3	
0650				4	
0651		5	1	2	
0652				3	
0653				4	
0654				5	
0655				6	
0656				7	
0657				8	
0658				9	
0659				10	
0660				11	
0661				12	
0662				13	
0663				14	
0664				15	
0665				16	
0666				17	
0667				18	
0668				19	
0669				20 1/	
0670				20	
0671			2	2	
0672				3	
0673				4	
0674				5	
0675				6	
0676				7	
0677				8	
0678				9	
0679				10	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0680	18°	5	4	2	NS
0681				3	
0682				4	
0683				5	
0684		1	1	2	S
0685				3	
0686				4	
0687				5	
0688				6	
0689				7	
0690				8	
0691				9	
0692				10	
0693				11	
0694				12	
0695				13	
0696				14	
0697				15	
0698				16	
0699				17	
0700				18	
0701				19	
0702				20 1/	
0703				20	
0704			2	2	
0705				3	
0706				4	
0707				5	
0708				6	
0709				7	
0710				8	
0711				9	
0712				10	
0713			4	2	
0714				3	
0715				4	
0716				5	
0717			5	2	
0718				3	
0719				4	
0720		2	1	2	
0721				3	
0722				4	
0723				5	
0724				6	
0725				7	
0726				8	
0727				9	
0728				10	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI Switch characteristics and dash numbers - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0778	18°	3	2	4	S
0779				5	
0780				6	
0781				7	
0782				8	
0783				9	
0784				10	
0785			4	2	
0786				3	
0787				4	
0788				5	
0789			5	2	
0790				3	
0791				4	
0792		4	1	2	
0793				3	
0794				4	
0795				5	
0796				6	
0797				7	
0798				8	
0799				9	
0800				10	
0801				11	
0802				12	
0803				13	
0804				14	
0805				15	
0806				16	
0807				17	
0808				18	
0809				19	
0810				20 1/	
0811				20	
0812			2	2	
0813				3	
0814				4	
0815				5	
0816				6	
0817				7	
0818				8	
0819				9	
0820				10	
0821			4	2	
0822				3	
0823				4	
0824				5	
0825			5	2	
0826				3	
0827				4	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0729	18°	2	1	11	S
0730				12	
0731				13	
0732				14	
0733				15	
0734				16	
0735				17	
0736				18	
0737				19	
0738				20 1/	
0739				20	
0740			2	2	
0741				3	
0742				4	
0743				5	
0744				6	
0745				7	
0746				8	
0747				9	
0748				10	
0749			4	2	
0750				3	
0751				4	
0752				5	
0753			5	2	
0754				3	
0755				4	
0756		3	1	2	
0757				3	
0758				4	
0759				5	
0760				6	
0761				7	
0762				8	
0763				9	
0764				10	
0765				11	
0766				12	
0767				13	
0768				14	
0769				15	
0770				16	
0771				17	
0772				18	
0773				19	
0774				20 1/	
0775				20	
0776			2	2	
0777				3	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0828	18°	5	1	2	S
0829				3	
0830				4	
0831				5	
0832				6	
0833				7	
0834				8	
0835				9	
0836				10	
0837				11	
0838				12	
0839				13	
0840				14	
0841				15	
0842				16	
0843				17	
0844				18	
0845				19	
0846				20 1/	
0847			2	20	
0848				2	
0849				3	
0850				4	
0851				5	
0852				6	
0853				7	
0854				8	
0855				9	
0856				10	
0857			4	2	
0858				3	
0859				4	
0860				5	
0861	22° 30'	1	1	2	NS
0862				3	
0863				4	
0864				5	
0865				6	
0866				7	
0867				8	
0868				9	
0869				10	
0870				11	
0871				12	
0872				13	
0873				14	
0874				15	
0875				16 1/	
0876			16		
0877			2	2	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0878	22° 30'	1	2	3	NS
0879				4	
0880				5	
0881				6	
0882				7	
0883				8	
0884			4	2	
0885				3	
0886				4	
0887		2	1	2	
0888				3	
0889				4	
0890				5	
0891				6	
0892				7	
0893				8	
0894				9	
0895				10	
0896				11	
0897				12	
0898				13	
0899				14	
0900				15	
0901				16 1/	
0902				16	
0903			2	2	
0904				3	
0905				4	
0906				5	
0907				6	
0908				7	
0909				8	
0910			4	2	
0911				3	
0912				4	
0913		3	1	2	
0914				3	
0915				4	
0916				5	
0917				6	
0918				7	
0919				8	
0920				9	
0921				10	
0922				11	
0923				12	
0924				13	
0925				14	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0926	22° 30'	3	1	15	NS
0927				16 1/	
0928				16	
0929			2	2	
0930				3	
0931				4	
0932				5	
0933				6	
0934				7	
0935				8	
0936			4	2	
0937				3	
0938				4	
0939		4	1	2	
0940				3	
0941				4	
0942				5	
0943				6	
0944				7	
0945				8	
0946				9	
0947				10	
0948				11	
0949				12	
0950				13	
0951				14	
0952				15	
0953				16 1/	
0954				16	
0955			2	2	
0956				3	
0957				4	
0958				5	
0959				6	
0960				7	
0961				8	
0962			4	2	
0963				3	
0964				4	
0965		5	1	2	
0966				3	
0967				4	
0968				5	
0969				6	
0970				7	
0971				8	
0972				9	
0973				10	
0974				11	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-0975	22° 30'	5	1	12	NS
0976				13	
0977				14	
0978				15	
0979				16 1/	
0980				16	
0981			2	2	
0982				3	
0983				4	
0984				5	
0985				6	
0986				7	
0987				8	
0988			4	2	
0989				3	
0990				4	
0991		1	1	2	S
0992				3	
0993				4	
0994				5	
0995				6	
0996				7	
0997				8	
0998				9	
0999				10	
1000				11	
1001				12	
1002				13	
1003				14	
1004				15	
1005				16 1/	
1006				16	
1007			2	2	
1008				3	
1009				4	
1010				5	
1011				6	
1012				7	
1013				8	
1014			4	2	
1015				3	
1016				4	
1017		2	1	2	
1018				3	
1019				4	
1020				5	
1021				6	
1022				7	
1023				8	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-1024	22° 30'	2	1	9	S
1025				10	
1026				11	
1027				12	
1028				13	
1029				14	
1030				15	
1031				16 1/	
1032				16	
1033			2	2	
1034				3	
1035				4	
1036				5	
1037				6	
1038				7	
1039				8	
1040			4	2	
1041				3	
1042				4	
1043		3	1	2	
1044				3	
1045				4	
1046				5	
1047				6	
1048				7	
1049				8	
1050				9	
1051				10	
1052				11	
1053				12	
1054				13	
1055				14	
1056				15	
1057				16 1/	
1058				16	
1059			2	2	
1060				3	
1061				4	
1062				5	
1063				6	
1064				7	
1065				8	
1066			4	2	
1067				3	
1068				4	
1069		4	1	2	
1070				3	
1071				4	

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

TABLE VI. Switch characteristics and dash numbers. - Continued

Dash number	Angle of throw	No. of decks	Poles per deck	Positions per pole	Switching characteristic (S or NS)
-1072	22° 30'	4	1	5	S
1073				6	
1074				7	
1075				8	
1076				9	
1077				10	
1078				11	
1079				12	
1080				13	
1081				14	
1082				15	
1083				16 1/	
1084				16	
1085			2	2	
1086				3	
1087				4	
1088				5	
1089				6	
1090				7	
1091				8	
1092			4	2	
1093				3	
1094				4	
1095		5	1	2	
1096				3	
1097				4	
1098				5	
1099				6	
1100				7	
1101				8	
1102				9	
1103				10	
1104				11	
1105				12	
1106				13	
1107				14	
1108				15	
1109				16 1/	
1110				16	
1111			2	2	
1112				3	
1113				4	
1114				5	
1115				6	
1116				7	
1117				8	
1118			4	2	
1119				3	
1120				4	

1/ Continuous rotation, all other switches have stops provided at the beginning and end of the range of control positions

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MU, MI
Navy - AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities
Army - ME, AT, AV, SM
Navy - MC, CG
Air Force - 19

Preparing activity.
Air Force - 80

Agent
DSA - ES

(Project 5930-0836)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

SMAMA (MMRE)
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C 16061

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:40Z
Check the source to verify that this is the current version before use.