INCH-POUND
MIL-DTL-3786/40B
19 November 2004
SUPERSEDING
MIL-S-3786/40A
21 December 1982

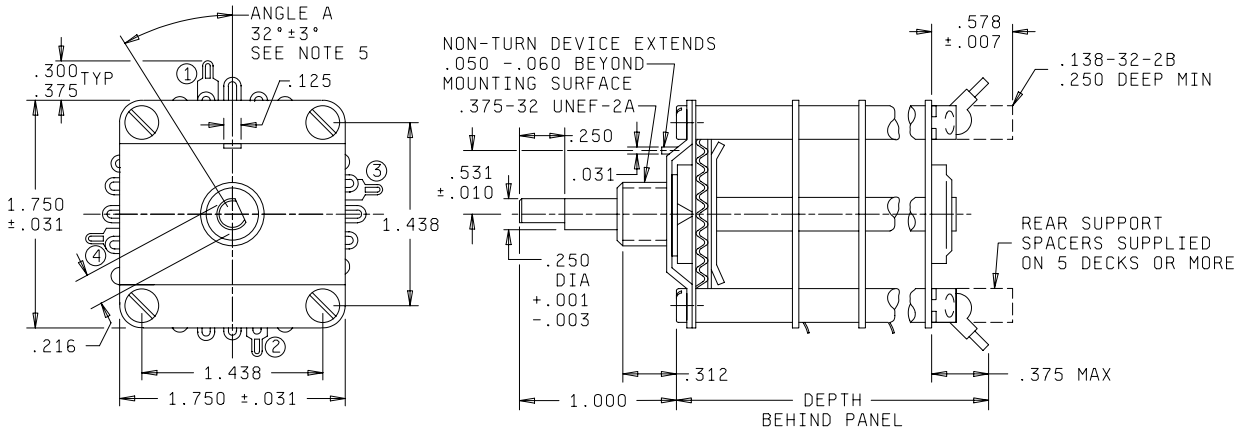
DETAIL SPECIFICATION

SWITCH, ROTARY, OPEN CONSTRUCTION. ½ AMPERE AND LOW LEVEL
STYLE SR40

Inactive for new design after 8 March 1999
=

This specification is approved for use by all
Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the switch described herein shall consist of this specification and MIL-DTL-3786.



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (.38 mm) for three place decimals.
4. The number of decks is as specified. See table V.
5. Angle A is formed by two lines which intersect at the center of the shaft - one through the center of the projected non-turn device; the other perpendicular to the shaft flat with the shaft in position 1.
6. Angle B locates #1 position from center lines as shown. Angle B is 30° for switches with angle of throw of 15° or 30°. Angle B is 33° 45' for switches with angle of throw of 11.25° or 22.5°.
7. Unless otherwise specified, angular tolerance is ±1°.

FIGURE 1. Style SR40 switches.

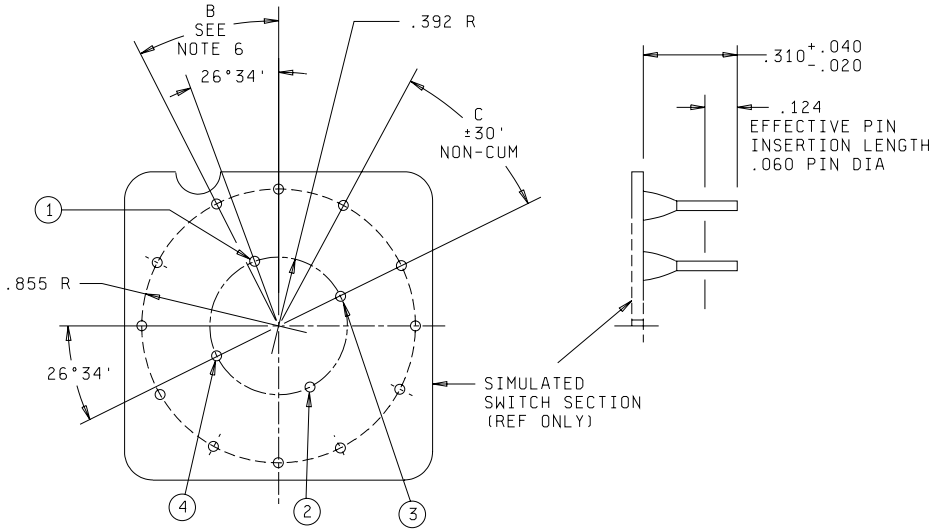Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.



VIEW LOOKING FROM FRONT OF SWITCH

1. Common terminal #1.
2. Common terminal #2.
3. Common terminal #3.
4. Common terminal #4. Common #1 (only) required for one pole switch. Commons #1 and #2 (only) required for two pole switch. Common #1, #2, #3, and #4 required for four pole switch.

RECOMMENDED PC BOARD HOLE PATTERN













Switching characteristics	Angle of throw	C Angle between holes	Required number of PC board holes 1/
Shorting	30°	15°	24
Non Shorting	30°	30°	12
Shorting	15°	15°	24
Shorting	22°30'	11°15'	32
Non Shorting	22°30'	22°30'	16
Shorting	11°15'	11°15'	32

1/ Plus required common terminal holes.

FIGURE 2. PC board hole locations and pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

TABLE I. Terminal locations.

POLES PER DECK	INDEXING ANGLE			
	30°	22.5°	15°	11.25°
1				
2				
4				

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2, and table I.

Angle of throw: 11.25°, 15°, 22,5°, or 30°, as applicable. See table V.

Terminals: The terminal tabs shall be bent at an angle of 0° ±15° from the plane of the section, except that the common and corner terminals shall be bent at an angle of 45° ±15° from the plane of the section. Printed circuit terminals shall be parallel to the shaft.

Orientation: The periphery of the stator shall have a notch adjacent to terminal 1.

Marking: All contact positions, including contacts not provided with terminals, shall be marked with consecutive numbers from 1 through 24 or 1 through 32.

Rear support: Switches which have six sections or more shall be supplied with four 6-32UNC-2B rear support spacers tapped to ¼ minimum depth to be used for rear support.

Construction type: Symbol N. Open construction without sealed shaft and panel seal.
Symbol S. Open construction with sealed shaft and panel seal.

Insulation material: Symbol G (glass laminate).

Temperature-life characteristic: Symbol E. 50,000 cycles at 65°C to +125°C.

Altitude: Symbol O (up to 10,000 feet.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Rotational torque: The values of shaft rotational torque shall be within the limits shown in table II. Table II applies only to switches with one pole per deck. After life test, the change in torque shall not exceed 35 percent of its initial value.

TABLE I. Rotational torque limits.

Construction type	Temperature	Torque (inch-ounces)		
		Minimum	Maximum	
			5 sections or less	More than 5 sections
N or S	Room	1.5	6	10
N	Minimum	1.5	8	13
S	Minimum	1.5	10	15

Shaft stops: Switches which contain stops shall withstand the following torques applied against the stops in both the clockwise and counterclockwise directions:

Switches with shaft and bushing seals: 25 lb-in.
Switches without shaft and bushing seals: 50 lb-in.

Contact resistance: Contact resistance shall not exceed the following values:

Initial and after vibration and shock: 5 milliohms
After moisture-resistance and slat spray: 5 milliohms
After initial soak and completion of life test: 10 milliohms
Low level circuit is applicable.

Vibration grade: Symbol 3 (10-2000 Hz).

Shock type: Symbol M (medium impact) and H (high impact).

Dielectric withstanding voltage: Applicable, using 1,500 volts throughout, except voltage shall be reduced to 1,000 volts after life and low level switching tests.

Mounting hardware: Each switch shall supplied with one each hexagon nut in accordance with MS25082-820 or equivalent, and one internal-tooth lockwasher in accordance with NASM35333-76 or equivalent.

Life rotational: See table III.

Special features: Symbol A (both high and low level contact load rating and both shaft grounding and EMI/FR (capability).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical loads.

Environmental condition	Inductive load (2.8H)		Resistive loads	
	mA	V	mA	V
At atmospheric pressure	50	28 dc	10 max	0.030 dc max or peak ac 1/
			500	28 dc
			125	115 V rms
			50	300 V rms

1/ Low level switching is applicable. Low level shall be conducted as one of the electrical loads tested during life (rotational) testing. The test circuit, power source, and monitoring apparatus shall be in accordance with method 311 beginning of the test and every 5,000 cycles thereafter, the contact resistance shall be measured.

Test samples to be used for qualification testing (4 each):

M3786/40-0626	M3786/40-1118
M3786/40-0734	M3786/40-1625

Part number: See table V. The military part number shall consist of the prefix M3786/40- and a dash number consisting of four numbers sequentially assigned. The numbers fall into the general pattern outlined on table IV:

TABLE IV. Dash number identification.

Dash numbers Construction: N	Dash numbers Construction: S	Angle of throw	Poles per deck	Pos. per pole	Switching characteristic	PC term.
0001-0086	1001-1086	30°	1, 2, 4	2-12	N	---
0087-0122	1087-1122	22.5°	2, 4	2-8	N	---
0123-0202	1123-1202	22.5°	1	9-16	N	---
0203-0254	1203-1254	15°	2, 4	2-11	S	---
0255-0384	1255-1384	15°	1	12-24	S	---
0385-0408	1385-1408	11.25°	4	2-7	S	---
0409-0456	1409-1456	11.25°	2	8-15	S	---
0457-0626	1457-1626	11.25°	1	16-32	S	---
0627-0672	1627-1672	30°	1, 2, 4	2-12	N	Yes
0673-0734	1673-1734	22.5°	1, 2, 4	2-16	N	Yes
0735-0831	1735-1831	15°	1, 2, 4	2-24	S	Yes
0832-0960	1832-1960	11.25°	1, 2, 4	2-32	S	Yes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

TABLE V. Switching characteristics and part numbers.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0001	1001	30°	4	1	4	2	N
0002	1002	30°	4	1	4	3	N
0003	1003	30°	4	2	8	2	N
0004	1004	30°	4	2	8	3	N
0005	1005	30°	4	3	12	2	N
0006	1006	30°	4	3	12	3	N
0007	1007	30°	4	4	16	2	N
0008	1008	30°	4	4	16	3	N
0009	1009	30°	2	1	2	4	N
0010	1010	30°	2	1	2	5	N
0011	1011	30°	2	1	2	6	N
0012	1012	30°	2	2	4	4	N
0013	1013	30°	2	2	4	5	N
0014	1014	30°	2	2	4	6	N
0015	1015	30°	2	3	6	4	N
0016	1016	30°	2	3	6	5	N
0017	1017	30°	2	3	6	6	N
0018	1018	30°	2	4	8	4	N
0019	1019	30°	2	4	8	5	N
0020	1020	30°	2	4	8	6	N
0021	1021	30°	2	5	10	4	N
0022	1022	30°	2	5	10	5	N
0023	1023	30°	2	5	10	6	N
0024	1024	30°	2	6	12	4	N
0025	1025	30°	2	6	12	5	N
0026	1026	30°	2	6	12	6	N
0027	1027	30°	1	1	1	7	N
0028	1028	30°	1	1	1	8	N
0029	1029	30°	1	1	1	9	N
0030	1030	30°	1	1	1	10	N
0031	1031	30°	1	1	1	11	N
0032	1032	30°	1	1	1	12 1/	N
0033	1033	30°	1	2	2	7	N
0034	1034	30°	1	2	2	8	N
0035	1035	30°	1	2	2	9	N
0036	1036	30°	1	2	2	10	N
0037	1037	30°	1	2	2	11	N
0038	1038	30°	1	2	2	12 1/	N
0039	1039	30°	1	3	3	7	N
0040	1040	30°	1	3	3	8	N
0041	1041	30°	1	3	3	9	N
0042	1042	30°	1	3	3	10	N
0043	1043	30°	1	3	3	11	N
0044	1044	30°	1	3	3	12 1/	N
0045	1045	30°	1	4	4	7	N
0046	1046	30°	1	4	4	8	N
0047	1047	30°	1	4	4	9	N
0048	1048	30°	1	4	4	10	N
0049	1049	30°	1	4	4	11	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0050	1050	30°	1	4	4	12 1/	N
0051	1051	30°	1	5	5	7	N
0052	1052	30°	1	5	5	8	N
0053	1053	30°	1	5	5	9	N
0054	1054	30°	1	5	5	10	N
0055	1055	30°	1	5	5	11	N
0056	1056	30°	1	6	6	12 1/	N
0057	1057	30°	1	6	6	7	N
0058	1058	30°	1	6	6	8	N
0059	1059	30°	1	6	6	9	N
0060	1060	30°	1	6	6	10	N
0061	1061	30°	1	6	6	11	N
0062	1062	30°	1	6	6	12 1/	N
0063	1063	30°	1	7	7	7	N
0064	1064	30°	1	7	7	8	N
0065	1065	30°	1	7	7	9	N
0066	1066	30°	1	7	7	10	N
0067	1067	30°	1	7	7	11	N
0068	1068	30°	1	7	7	12 1/	N
0069	1069	30°	1	8	8	7	N
0070	1070	30°	1	8	8	8	N
0071	1071	30°	1	8	8	9	N
0072	1072	30°	1	8	8	10	N
0073	1073	30°	1	8	8	11	N
0074	1074	30°	1	8	8	12 1/	N
0075	1075	30°	1	9	9	7	N
0076	1076	30°	1	9	9	8	N
0077	1077	30°	1	9	9	9	N
0078	1078	30°	1	9	9	10	N
0079	1079	30°	1	9	9	11	N
0080	1080	30°	1	9	9	12 1/	N
0081	1081	30°	1	10	10	7	N
0082	1082	30°	1	10	10	8	N
0083	1083	30°	1	10	10	9	N
0084	1084	30°	1	10	10	10	N
0085	1085	30°	1	10	10	11	N
0086	1086	30°	1	10	10	12 1/	N
0087	1087	22-1/2°	4	1	4	2	N
0088	1088	22-1/2°	4	1	4	3	N
0089	1089	22-1/2°	4	1	4	4	N
0090	1090	22-1/2°	4	2	8	2	N
0091	1091	22-1/2°	4	2	8	3	N
0092	1092	22-1/2°	4	2	8	4	N
0093	1093	22-1/2°	4	3	12	2	N
0094	1094	22-1/2°	4	3	12	3	N
0095	1095	22-1/2°	4	3	12	4	N
0096	1096	22-1/2°	4	4	16	2	N
0097	1097	22-1/2°	4	4	16	3	N
0098	1098	22-1/2°	4	4	16	4	N
0099	1099	22-1/2°	2	1	2	5	N
0100	1100	22-1/2°	2	1	2	6	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0101	1101	22-1/2°	2	1	2	7	N
0102	1102	22-1/2°	2	1	2	8	N
0103	1103	22-1/2°	2	2	4	5	N
0104	1104	22-1/2°	2	2	4	6	N
0105	1105	22-1/2°	2	2	4	7	N
0106	1106	22-1/2°	2	2	4	8	N
0107	1107	22-1/2°	2	3	6	5	N
0108	1108	22-1/2°	2	3	6	6	N
0109	1109	22-1/2°	2	3	6	7	N
0110	1110	22-1/2°	2	3	6	8	N
0111	1111	22-1/2°	2	4	8	5	N
0112	1112	22-1/2°	2	4	8	6	N
0113	1113	22-1/2°	2	4	8	7	N
0114	1114	22-1/2°	2	4	8	8	N
0115	1115	22-1/2°	2	5	10	5	N
0116	1116	22-1/2°	2	5	10	6	N
0117	1117	22-1/2°	2	5	10	7	N
0118	1118	22-1/2°	2	5	10	8	N
0119	1119	22-1/2°	2	6	12	5	N
0120	1120	22-1/2°	2	6	12	6	N
0121	1121	22-1/2°	2	6	12	7	N
0122	1122	22-1/2°	2	6	12	8	N
0123	1123	22-1/2°	1	1	1	9	N
0124	1124	22-1/2°	1	1	1	10	N
0125	1125	22-1/2°	1	1	1	11	N
0126	1126	22-1/2°	1	1	1	12	N
0127	1127	22-1/2°	1	1	1	13	N
0128	1128	22-1/2°	1	1	1	14	N
0129	1129	22-1/2°	1	1	1	15	N
0130	1130	22-1/2°	1	1	1	16 1/	N
0131	1131	22-1/2°	1	2	2	9	N
0132	1132	22-1/2°	1	2	2	10	N
0133	1133	22-1/2°	1	2	2	11	N
0134	1134	22-1/2°	1	2	2	12	N
0135	1135	22-1/2°	1	2	2	13	N
0136	1136	22-1/2°	1	2	2	14	N
0137	1137	22-1/2°	1	2	2	15	N
0138	1138	22-1/2°	1	2	2	16 1/	N
0139	1139	22-1/2°	1	3	3	9	N
0140	1140	22-1/2°	1	3	3	10	N
0141	1141	22-1/2°	1	3	3	11	N
0142	1142	22-1/2°	1	3	3	12	N
0143	1143	22-1/2°	1	3	3	13	N
0144	1144	22-1/2°	1	3	3	14	N
0145	1145	22-1/2°	1	3	3	15	N
0146	1146	22-1/2°	1	3	3	16 1/	N
0147	1147	22-1/2°	1	4	4	9	N
0148	1148	22-1/2°	1	4	4	10	N
0149	1149	22-1/2°	1	4	4	11	N
0150	1150	22-1/2°	1	4	4	12	N
0151	1151	22-1/2°	1	4	4	13	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0152	1152	22-1/2°	1	4	4	14	N
0153	1153	22-1/2°	1	4	4	15	N
0154	1154	22-1/2°	1	4	4	16 1/	N
0155	1155	22-1/2°	1	5	5	9	N
0156	1156	22-1/2°	1	5	5	10	N
0157	1157	22-1/2°	1	5	5	11	N
0158	1158	22-1/2°	1	5	5	12	N
0159	1159	22-1/2°	1	5	5	13	N
0160	1160	22-1/2°	1	5	5	14	N
0161	1161	22-1/2°	1	5	5	15	N
0162	1162	22-1/2°	1	5	5	16 1/	N
0163	1163	22-1/2°	1	6	6	9	N
0164	1164	22-1/2°	1	6	6	10	N
0165	1165	22-1/2°	1	6	6	11	N
0166	1166	22-1/2°	1	6	6	12	N
0167	1167	22-1/2°	1	6	6	13	N
0168	1168	22-1/2°	1	6	6	14	N
0169	1169	22-1/2°	1	6	6	15	N
0170	1170	22-1/2°	1	6	6	16 1/	N
0171	1171	22-1/2°	1	7	7	9	N
0172	1172	22-1/2°	1	7	7	10	N
0173	1173	22-1/2°	1	7	7	11	N
0174	1174	22-1/2°	1	7	7	12	N
0175	1175	22-1/2°	1	7	7	13	N
0176	1176	22-1/2°	1	7	7	14	N
0177	1177	22-1/2°	1	7	7	15	N
0178	1178	22-1/2°	1	7	7	16 1/	N
0179	1179	22-1/2°	1	8	8	9	N
0180	1180	22-1/2°	1	8	8	10	N
0181	1181	22-1/2°	1	8	8	11	N
0182	1182	22-1/2°	1	8	8	12	N
0183	1183	22-1/2°	1	8	8	13	N
0184	1184	22-1/2°	1	8	8	14	N
0185	1185	22-1/2°	1	8	8	15	N
0186	1186	22-1/2°	1	8	8	16 1/	N
0187	1187	22-1/2°	1	9	9	9	N
0188	1188	22-1/2°	1	9	9	10	N
0189	1189	22-1/2°	1	9	9	11	N
0190	1190	22-1/2°	1	9	9	12	N
0191	1191	22-1/2°	1	9	9	13	N
0192	1192	22-1/2°	1	9	9	14	N
0193	1193	22-1/2°	1	9	9	15	N
0194	1194	22-1/2°	1	9	9	16 1/	N
0195	1195	22-1/2°	1	10	10	9	N
0196	1196	22-1/2°	1	10	10	10	N
0197	1197	22-1/2°	1	10	10	11	N
0198	1198	22-1/2°	1	10	10	12	N
0199	1199	22-1/2°	1	10	10	13	N
0200	1200	22-1/2°	1	10	10	14	N
0201	1201	22-1/2°	1	10	10	15	N
0202	1202	22-1/2°	1	10	10	16 1/	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0203	1203	15°	4	1	4	2	N
0204	1204	15°	4	1	4	3	N
0205	1205	15°	4	1	4	4	N
0206	1206	15°	4	1	4	5	N
0207	1207	15°	4	2	8	2	N
0208	1208	15°	4	2	8	3	N
0209	1209	15°	4	2	8	4	N
0210	1210	15°	4	2	8	5	N
0211	1211	15°	4	3	12	2	N
0212	1212	15°	4	3	12	3	N
0213	1213	15°	4	3	12	4	N
0214	1214	15°	4	3	12	5	N
0215	1215	15°	4	4	16	2	N
0216	1216	15°	4	4	16	3	N
0217	1217	15°	4	4	16	4	N
0218	1218	15°	4	4	16	5	N
0219	1219	15°	2	1	2	6	N
0220	1220	15°	2	1	2	7	N
0221	1221	15°	2	1	2	8	N
0222	1222	15°	2	1	2	9	N
0223	1223	15°	2	1	2	10	N
0224	1224	15°	2	1	2	11	N
0225	1225	15°	2	2	4	6	N
0226	1226	15°	2	2	4	7	N
0227	1227	15°	2	2	4	8	N
0228	1228	15°	2	2	4	9	N
0229	1229	15°	2	2	4	10	N
0230	1230	15°	2	2	4	11	N
0231	1231	15°	2	3	6	6	N
0232	1232	15°	2	3	6	7	N
0233	1233	15°	2	3	6	8	N
0234	1234	15°	2	3	6	9	N
0235	1235	15°	2	3	6	10	N
0236	1236	15°	2	3	6	11	N
0237	1237	15°	2	4	8	6	N
0238	1238	15°	2	4	8	7	N
0239	1239	15°	2	4	8	8	N
0240	1240	15°	2	4	8	9	N
0241	1241	15°	2	4	8	10	N
0242	1242	15°	2	4	8	11	N
0243	1243	15°	2	5	10	6	N
0244	1244	15°	2	5	10	7	N
0245	1245	15°	2	5	10	8	N
0246	1246	15°	2	5	10	9	N
0247	1247	15°	2	5	10	10	N
0248	1248	15°	2	5	10	11	N
0249	1249	15°	2	6	12	6	N
0250	1250	15°	2	6	12	7	N
0251	1251	15°	2	6	12	8	N
0252	1252	15°	2	6	12	9	N
0253	1253	15°	2	6	12	10	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0254	1254	15°	2	6	12	11	N
0255	1255	15°	1	1	1	12	N
0256	1256	15°	1	1	1	13	N
0257	1257	15°	1	1	1	14	N
0258	1258	15°	1	1	1	15	N
0259	1259	15°	1	1	1	16	N
0260	1260	15°	1	1	1	17	N
0261	1261	15°	1	1	1	18	N
0262	1262	15°	1	1	1	19	N
0263	1263	15°	1	1	1	20	N
0264	1264	15°	1	1	1	21	N
0265	1265	15°	1	1	1	22	N
0266	1266	15°	1	1	1	23	N
0267	1267	15°	1	1	1	24 1/	N
0268	1268	15°	1	2	2	12	N
0269	1269	15°	1	2	2	13	N
0270	1270	15°	1	2	2	14	N
0271	1271	15°	1	2	2	15	N
0272	1272	15°	1	2	2	16	N
0273	1273	15°	1	2	2	17	N
0274	1274	15°	1	2	2	18	N
0275	1275	15°	1	2	2	19	N
0276	1276	15°	1	2	2	20	N
0277	1277	15°	1	2	2	21	N
0278	1278	15°	1	2	2	22	N
0279	1279	15°	1	2	2	23	N
0280	1280	15°	1	2	2	24 1/	N
0281	1281	15°	1	3	3	12	N
0282	1282	15°	1	3	3	13	N
0283	1283	15°	1	3	3	14	N
0284	1284	15°	1	3	3	15	N
0285	1285	15°	1	3	3	16	N
0286	1286	15°	1	3	3	17	N
0287	1287	15°	1	3	3	18	N
0288	1288	15°	1	3	3	19	N
0289	1289	15°	1	3	3	20	N
0290	1290	15°	1	3	3	21	N
0291	1291	15°	1	3	3	22	N
0292	1292	15°	1	3	3	23	N
0293	1293	15°	1	3	3	24 1/	N
0294	1294	15°	1	4	4	12	N
0295	1295	15°	1	4	4	13	N
0296	1296	15°	1	4	4	14	N
0297	1297	15°	1	4	4	15	N
0298	1298	15°	1	4	4	16	N
0299	1299	15°	1	4	4	17	N
0300	1300	15°	1	4	4	18	N
0301	1301	15°	1	4	4	19	N
0302	1302	15°	1	4	4	20	N
0303	1303	15°	1	4	4	21	N
0304	1304	15°	1	4	4	22	N
0305	1305	15°	1	4	4	23	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0306	1306	15°	1	4	4	24 1/	N
0307	1307	15°	1	5	5	12	N
0308	1308	15°	1	5	5	13	N
0309	1309	15°	1	5	5	14	N
0310	1310	15°	1	5	5	15	N
0311	1311	15°	1	5	5	16	N
0312	1312	15°	1	5	5	17	N
0313	1313	15°	1	5	5	18	N
0314	1314	15°	1	5	5	19	N
0315	1315	15°	1	5	5	20	N
0316	1316	15°	1	5	5	21	N
0317	1317	15°	1	5	5	22	N
0318	1318	15°	1	5	5	23	N
0319	1319	15°	1	5	5	24 1/	N
0320	1320	15°	1	6	6	12	N
0321	1321	15°	1	6	6	13	N
0322	1322	15°	1	6	6	14	N
0323	1323	15°	1	6	6	15	N
0324	1324	15°	1	6	6	16	N
0325	1325	15°	1	6	6	17	N
0326	1326	15°	1	6	6	18	N
0327	1327	15°	1	6	6	19	N
0328	1328	15°	1	6	6	20	N
0329	1329	15°	1	6	6	21	N
0330	1330	15°	1	6	6	22	N
0331	1331	15°	1	6	6	23	N
0332	1332	15°	1	6	6	24 1/	N
0333	1333	15°	1	7	7	12	N
0334	1334	15°	1	7	7	13	N
0335	1335	15°	1	7	7	14	N
0336	1336	15°	1	7	7	15	N
0337	1337	15°	1	7	7	16	N
0338	1338	15°	1	7	7	17	N
0339	1339	15°	1	7	7	18	N
0340	1340	22-1/2°	1	7	7	19	N
0341	1341	22-1/2°	1	7	7	20	N
0342	1342	22-1/2°	1	7	7	21	N
0343	1343	22-1/2°	1	7	7	22	N
0344	1344	22-1/2°	1	7	7	23	N
0345	1345	22-1/2°	1	7	7	24 1/	N
0346	1346	22-1/2°	1	8	8	12	N
0347	1347	22-1/2°	1	8	8	13	N
0348	1348	22-1/2°	1	8	8	14	N
0349	1349	22-1/2°	1	8	8	15	N
0350	1350	22-1/2°	1	8	8	16	N
0351	1351	22-1/2°	1	8	8	17	N
0352	1352	22-1/2°	1	8	8	18	N
0353	1353	22-1/2°	1	8	8	19	N
0354	1354	22-1/2°	1	8	8	20	N
0355	1355	22-1/2°	1	8	8	21	N
0356	1356	22-1/2°	1	8	8	22	N
0357	1357	22-1/2°	1	8	8	23	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0358	1358	22-1/2°	1	8	8	24 1/	N
0359	1359	22-1/2°	1	9	9	12	N
0360	1360	22-1/2°	1	9	9	13	N
0361	1361	22-1/2°	1	9	9	14	N
0362	1362	22-1/2°	1	9	9	15	N
0363	1363	22-1/2°	1	9	9	16	N
0364	1364	22-1/2°	1	9	9	17	N
0365	1365	22-1/2°	1	9	9	18	N
0366	1366	22-1/2°	1	9	9	19	N
0367	1367	22-1/2°	1	9	9	20	N
0368	1368	22-1/2°	1	9	9	21	N
0369	1369	22-1/2°	1	9	9	22	N
0370	1370	22-1/2°	1	9	9	23	N
0371	1371	22-1/2°	1	9	9	24 1/	N
0372	1372	22-1/2°	1	10	10	12	N
0373	1373	22-1/2°	1	10	10	13	N
0374	1374	22-1/2°	1	10	10	14	N
0375	1375	22-1/2°	1	10	10	15	N
0376	1376	22-1/2°	1	10	10	16	N
0377	1377	22-1/2°	1	10	10	17	N
0378	1378	22-1/2°	1	10	10	18	N
0379	1379	22-1/2°	1	10	10	19	N
0380	1380	22-1/2°	1	10	10	20	N
0381	1381	22-1/2°	1	10	10	21	N
0382	1382	22-1/2°	1	10	10	22	N
0383	1383	22-1/2°	1	10	10	23	N
0384	1384	22-1/2°	1	10	10	24 1/	N
0385	1385	11.25°	4	1	4	2	N
0386	1386	11.25°	4	1	4	3	N
0387	1387	11.25°	4	1	4	4	N
0388	1388	11.25°	4	1	4	5	N
0389	1389	11.25°	4	1	4	6	N
0390	1390	11.25°	4	1	4	7	N
0391	1391	11.25°	4	2	8	2	N
0392	1392	11.25°	4	2	8	3	N
0393	1393	11.25°	4	2	8	4	N
0394	1394	11.25°	4	2	8	5	N
0395	1395	11.25°	4	2	8	6	N
0396	1396	11.25°	4	2	8	7	N
0397	1397	11.25°	4	3	12	2	N
0398	1398	11.25°	4	3	12	3	N
0399	1399	11.25°	4	3	12	4	N
0400	1400	11.25°	4	3	12	5	N
0401	1401	11.25°	4	3	12	6	N
0402	1402	11.25°	4	3	12	7	N
0403	1403	11.25°	4	4	16	2	N
0404	1404	11.25°	4	4	16	3	N
0405	1405	11.25°	4	4	16	4	N
0406	1406	11.25°	4	4	16	5	N
0407	1407	11.25°	4	4	16	6	N
0408	1408	11.25°	4	4	16	7	N
0409	1409	11.25°	2	1	2	8	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0410	1410	11.25°	2	1	2	9	N
0411	1411	11.25°	2	1	2	10	N
0412	1412	11.25°	2	1	2	11	N
0413	1413	11.25°	2	1	2	12	N
0414	1414	11.25°	2	1	2	13	N
0415	1415	11.25°	2	1	2	14	N
0416	1416	11.25°	2	1	2	15	N
0417	1417	11.25°	2	2	4	8	N
0418	1418	11.25°	2	2	4	9	N
0419	1419	11.25°	2	2	4	10	N
0420	1420	11.25°	2	2	4	11	N
0421	1421	11.25°	2	2	4	12	N
0422	1422	11.25°	2	2	4	13	N
0423	1423	11.25°	2	2	4	14	N
0424	1424	11.25°	2	2	4	15	N
0425	1425	11.25°	2	3	6	8	N
0426	1426	11.25°	2	3	6	9	N
0427	1427	11.25°	2	3	6	10	N
0428	1428	11.25°	2	3	6	11	N
0429	1429	11.25°	2	3	6	12	N
0430	1430	11.25°	2	3	6	13	N
0431	1431	11.25°	2	3	6	14	N
0432	1432	11.25°	2	3	6	15	N
0433	1433	11.25°	2	4	8	8	N
0434	1434	11.25°	2	4	8	9	N
0435	1435	11.25°	2	4	8	10	N
0436	1436	11.25°	2	4	8	11	N
0437	1437	11.25°	2	4	8	12	N
0438	1438	11.25°	2	4	8	13	N
0439	1439	11.25°	2	4	8	14	N
0440	1440	11.25°	2	4	8	15	N
0441	1441	11.25°	2	5	10	8	N
0442	1442	11.25°	2	5	10	9	N
0443	1443	11.25°	2	5	10	10	N
0444	1444	11.25°	2	5	10	11	N
0445	1445	11.25°	2	5	10	12	N
0446	1446	11.25°	2	5	10	13	N
0447	1447	11.25°	2	5	10	14	N
0448	1448	11.25°	2	5	10	15	N
0449	1449	11.25°	2	6	12	8	N
0450	1450	11.25°	2	6	12	9	N
0451	1451	11.25°	2	6	12	10	N
0452	1452	11.25°	2	6	12	11	N
0453	1453	11.25°	2	6	12	12	N
0454	1454	11.25°	2	6	12	13	N
0455	1455	11.25°	2	6	12	14	N
0456	1456	11.25°	2	6	12	15	N
0457	1457	11.25°	1	1	1	16	N
0458	1458	11.25°	1	1	1	17	N
0459	1459	11.25°	1	1	1	18	N
0460	1460	11.25°	1	1	1	19	N
0461	1461	11.25°	1	1	1	20	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0462	1462	11.25°	1	1	1	21	N
0463	1463	11.25°	1	1	1	22	N
0464	1464	11.25°	1	1	1	23	N
0465	1465	11.25°	1	1	1	24	N
0466	1466	11.25°	1	1	1	25	N
0467	1467	11.25°	1	1	1	26	N
0468	1468	11.25°	1	1	1	27	N
0469	1469	11.25°	1	1	1	28	N
0470	1470	11.25°	1	1	1	29	N
0471	1471	11.25°	1	1	1	30	N
0472	1472	11.25°	1	1	1	31	N
0473	1473	11.25°	1	1	1	32 1/	N
0474	1474	11.25°	1	2	2	16	N
0475	1475	11.25°	1	2	2	17	N
0476	1476	11.25°	1	2	2	18	N
0477	1477	11.25°	1	2	2	19	N
0478	1478	11.25°	1	2	2	20	N
0479	1479	11.25°	1	2	2	21	N
0480	1480	11.25°	1	2	2	22	N
0481	1481	11.25°	1	2	2	23	N
0482	1482	11.25°	1	2	2	24	N
0483	1483	11.25°	1	2	2	25	N
0484	1484	11.25°	1	2	2	26	N
0485	1485	11.25°	1	2	2	27	N
0486	1486	11.25°	1	2	2	28	N
0487	1487	11.25°	1	2	2	29	N
0488	1488	11.25°	1	2	2	30	N
0489	1489	11.25°	1	2	2	31	N
0490	1490	11.25°	1	2	2	32 1/	N
0491	1491	11.25°	1	3	3	16	N
0492	1492	11.25°	1	3	3	17	N
0493	1493	11.25°	1	3	3	18	N
0494	1494	11.25°	1	3	3	19	N
0495	1495	11.25°	1	3	3	20	N
0496	1496	11.25°	1	3	3	21	N
0497	1497	11.25°	1	3	3	22	N
0498	1498	11.25°	1	3	3	23	N
0499	1499	11.25°	1	3	3	24	N
0500	1500	11.25°	1	3	3	25	N
0501	1501	11.25°	1	3	3	26	N
0502	1502	11.25°	1	3	3	27	N
0503	1503	11.25°	1	3	3	28	N
0504	1504	11.25°	1	3	3	29	N
0505	1505	11.25°	1	3	3	30	N
0506	1506	11.25°	1	3	3	31	N
0507	1507	11.25°	1	3	3	32 1/	N
0508	1508	11.25°	1	4	4	16	N
0509	1509	11.25°	1	4	4	17	N
0510	1510	11.25°	1	4	4	18	N
0511	1511	11.25°	1	4	4	19	N
0512	1512	11.25°	1	4	4	20	N
0513	1513	11.25°	1	4	4	21	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0514	1514	11.25°	1	4	4	22	N
0515	1515	11.25°	1	4	4	23	N
0516	1516	11.25°	1	4	4	24	N
0517	1517	11.25°	1	4	4	25	N
0518	1518	11.25°	1	4	4	26	N
0519	1519	11.25°	1	4	4	27	N
0520	1520	11.25°	1	4	4	28	N
0521	1521	11.25°	1	4	4	29	N
0522	1522	11.25°	1	4	4	30	N
0523	1523	11.25°	1	4	4	31	N
0524	1524	11.25°	1	4	4	32 1/	N
0525	1525	11.25°	1	5	5	16	N
0526	1526	11.25°	1	5	5	17	N
0527	1527	11.25°	1	5	5	18	N
0528	1528	11.25°	1	5	5	19	N
0529	1529	11.25°	1	5	5	20	N
0530	1530	11.25°	1	5	5	21	N
0531	1531	11.25°	1	5	5	22	N
0532	1532	11.25°	1	5	5	23	N
0533	1533	11.25°	1	5	5	24	N
0534	1534	11.25°	1	5	5	25	N
0535	1535	11.25°	1	5	5	26	N
0536	1536	11.25°	1	5	5	27	N
0537	1537	11.25°	1	5	5	28	N
0538	1538	11.25°	1	5	5	29	N
0539	1539	11.25°	1	5	5	30	N
0540	1540	11.25°	1	5	5	31	N
0541	1541	11.25°	1	5	5	32 1/	N
0542	1542	11.25°	1	6	6	16	N
0543	1543	11.25°	1	6	6	17	N
0544	1544	11.25°	1	6	6	18	N
0545	1545	11.25°	1	6	6	19	N
0546	1546	11.25°	1	6	6	20	N
0547	1547	11.25°	1	6	6	21	N
0548	1548	11.25°	1	6	6	22	N
0549	1549	11.25°	1	6	6	23	N
0550	1550	11.25°	1	6	6	24	N
0551	1551	11.25°	1	6	6	25	N
0552	1552	11.25°	1	6	6	26	N
0553	1553	11.25°	1	6	6	27	N
0554	1554	11.25°	1	6	6	28	N
0555	1555	11.25°	1	6	6	29	N
0556	1556	11.25°	1	6	6	30	N
0557	1557	11.25°	1	6	6	31	N
0558	1558	11.25°	1	6	6	32 1/	N
0559	1559	11.25°	1	7	7	16	N
0560	1560	11.25°	1	7	7	17	N
0561	1561	11.25°	1	7	7	18	N
0562	1562	11.25°	1	7	7	19	N
0563	1563	11.25°	1	7	7	20	N
0564	1564	11.25°	1	7	7	21	N
0565	1565	11.25°	1	7	7	22	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0566	1566	11.25°	1	7	7	23	N
0567	1567	11.25°	1	7	7	24	N
0568	1568	11.25°	1	7	7	25	N
0569	1569	11.25°	1	7	7	26	N
0570	1570	11.25°	1	7	7	27	N
0571	1571	11.25°	1	7	7	28	N
0572	1572	11.25°	1	7	7	29	N
0573	1573	11.25°	1	7	7	30	N
0574	1574	11.25°	1	7	7	31	N
0575	1575	11.25°	1	7	7	32 1/	N
0576	1576	11.25°	1	8	8	16	N
0577	1577	11.25°	1	8	8	17	N
0578	1578	11.25°	1	8	8	18	N
0579	1579	11.25°	1	8	8	19	N
0580	1580	11.25°	1	8	8	20	N
0581	1581	11.25°	1	8	8	21	N
0582	1582	11.25°	1	8	8	22	N
0583	1583	11.25°	1	8	8	23	N
0584	1584	11.25°	1	8	8	24	N
0585	1585	11.25°	1	8	8	25	N
0586	1586	11.25°	1	8	8	26	N
0587	1587	11.25°	1	8	8	27	N
0588	1588	11.25°	1	8	8	28	N
0589	1589	11.25°	1	8	8	29	N
0590	1590	11.25°	1	8	8	30	N
0591	1591	11.25°	1	8	8	31	N
0592	1592	11.25°	1	8	8	32 1/	N
0593	1593	11.25°	1	9	9	16	N
0594	1594	11.25°	1	9	9	17	N
0595	1595	11.25°	1	9	9	18	N
0596	1596	11.25°	1	9	9	19	N
0597	1597	11.25°	1	9	9	20	N
0598	1598	11.25°	1	9	9	21	N
0599	1599	11.25°	1	9	9	22	N
0600	1600	11.25°	1	9	9	23	N
0601	1601	11.25°	1	9	9	24	N
0602	1602	11.25°	1	9	9	25	N
0603	1603	11.25°	1	9	9	26	N
0604	1604	11.25°	1	9	9	27	N
0605	1605	11.25°	1	9	9	28	N
0606	1606	11.25°	1	9	9	29	N
0607	1607	11.25°	1	9	9	30	N
0608	1608	11.25°	1	9	9	31	N
0609	1609	11.25°	1	9	9	32 1/	N
0610	1610	11.25°	1	10	10	16	N
0611	1611	11.25°	1	10	10	17	N
0612	1612	11.25°	1	10	10	18	N
0613	1613	11.25°	1	10	10	19	N
0614	1614	11.25°	1	10	10	20	N
0615	1615	11.25°	1	10	10	21	N
0616	1616	11.25°	1	10	10	22	N
0617	1617	11.25°	1	10	10	23	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0618	1618	11.25°	1	10	10	24	N
0619	1619	11.25°	1	10	10	25	N
0620	1620	11.25°	1	10	10	26	N
0621	1621	11.25°	1	10	10	27	N
0622	1622	11.25°	1	10	10	28	N
0623	1623	11.25°	1	10	10	29	N
0624	1624	11.25°	1	10	10	30	N
0625	1625	11.25°	1	10	10	31	N
0626	1626	11.25°	1	10	10	32 1/	N
0627	1627	30°	4	1 2/	4	2	N
0628	1628	30°	4	1 2/	4	3	N
0629	1629	30°	4	2 3/	8	2	N
0630	1630	30°	4	2 3/	8	3	N
0631	1631	30°	2	1 2/	2	4	N
0632	1632	30°	2	1 2/	2	5	N
0633	1633	30°	2	1 2/	2	6	N
0634	1634	30°	2	2 3/	4	4	N
0635	1635	30°	2	2 3/	4	5	N
0636	1636	30°	2	2 3/	4	6	N
0637	1637	30°	2	3 3/	6	4	N
0638	1638	30°	2	3 3/	6	5	N
0639	1639	30°	2	3 3/	6	6	N
0640	1640	30°	2	4 3/	8	4	N
0641	1641	30°	2	4 3/	8	5	N
0642	1642	30°	2	4 3/	8	6	N
0643	1643	30°	1	1 2/	1	7	N
0644	1644	30°	1	1 2/	1	8	N
0645	1645	30°	1	1 2/	1	9	N
0646	1646	30°	1	1 2/	1	10	N
0647	1647	30°	1	1 2/	1	11	N
0648	1648	30°	1	1 2/	1	12 1/	N
0649	1649	30°	1	2 3/	2	7	N
0650	1650	30°	1	2 3/	2	8	N
0651	1651	30°	1	2 3/	2	9	N
0652	1652	30°	1	2 3/	2	10	N
0653	1653	30°	1	2 3/	2	11	N
0654	1654	30°	1	2 3/	2	12 1/	N
0655	1655	30°	1	3 3/	3	7	N
0656	1656	30°	1	3 3/	3	8	N
0657	1657	30°	1	3 3/	3	9	N
0658	1658	30°	1	3 3/	3	10	N
0659	1659	30°	1	3 3/	3	11	N
0660	1660	30°	1	3 3/	3	12 1/	N
0661	1661	30°	1	4 3/	4	7	N
0662	1662	30°	1	4 3/	4	8	N
0663	1663	30°	1	4 3/	4	9	N
0664	1664	30°	1	4 3/	4	10	N
0665	1665	30°	1	4 3/	4	11	N
0666	1666	30°	1	4 3/	4	12 1/	N
0667	1667	30°	1	5 3/	5	7	N
0668	1668	30°	1	5 3/	5	8	N
0669	1669	30°	1	5 3/	5	9	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0670	1670	30°	1	5 3/	5	10	N
0671	1671	30°	1	5 3/	5	11	N
0672	1672	30°	1	5 3/	5	12 1/	N
0673	1673	22.5°	4	1 2/	2	2	N
0674	1674	22.5°	4	1 2/	2	3	N
0675	1675	22.5°	4	1 2/	2	4	N
0676	1676	22.5°	4	2 3/	4	2	N
0677	1677	22.5°	4	2 3/	4	3	N
0678	1678	22.5°	4	2 3/	4	4	N
0679	1679	22.5°	2	1 2/	2	5	N
0680	1680	22.5°	2	1 2/	2	6	N
0681	1681	22.5°	2	1 2/	2	7	N
0682	1682	22.5°	2	1 2/	2	8	N
0683	1683	22.5°	2	2 3/	4	5	N
0684	1684	22.5°	2	2 3/	4	6	N
0685	1685	22.5°	2	2 3/	4	7	N
0686	1686	22.5°	2	2 3/	4	8	N
0687	1687	22.5°	2	3 3/	6	5	N
0688	1688	22.5°	2	3 3/	6	6	N
0689	1689	22.5°	2	3 3/	6	7	N
0690	1690	22.5°	2	3 3/	6	8	N
0691	1691	22.5°	2	4 3/	8	5	N
0692	1692	22.5°	2	4 3/	8	6	N
0693	1693	22.5°	2	4 3/	8	7	N
0694	1694	22.5°	2	4 3/	8	8	N
0695	1695	22.5°	1	1 2/	1	9	N
0696	1696	22.5°	1	1 2/	1	10	N
0697	1697	22.5°	1	1 2/	1	11	N
0698	1698	22.5°	1	1 2/	1	12	N
0699	1699	22.5°	1	1 2/	1	13	N
0700	1700	22.5°	1	1 2/	1	14	N
0701	1701	22.5°	1	1 2/	1	15	N
0702	1702	22.5°	1	1 2/	1	16 1/	N
0703	1703	22.5°	1	2 3/	2	9	N
0704	1704	22.5°	1	2 3/	2	10	N
0705	1705	22.5°	1	2 3/	2	11	N
0706	1706	22.5°	1	2 3/	2	12	N
0707	1707	22.5°	1	2 3/	2	13	N
0708	1708	22.5°	1	2 3/	2	14	N
0709	1709	22.5°	1	2 3/	2	15	N
0710	1710	22.5°	1	2 3/	2	16 1/	N
0711	1711	22.5°	1	3 3/	3	9	N
0712	1712	22.5°	1	3 3/	3	10	N
0713	1713	22.5°	1	3 3/	3	11	N
0714	1714	22.5°	1	3 3/	3	12	N
0715	1715	22.5°	1	3 3/	3	13	N
0716	1716	22.5°	1	3 3/	3	14	N
0717	1717	22.5°	1	3 3/	3	15	N
0718	1718	22.5°	1	3 3/	3	16 1/	N
0719	1719	22.5°	1	4 3/	4	9	N
0720	1720	22.5°	1	4 3/	4	10	N
0721	1721	22.5°	1	4 3/	4	11	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0722	1722	22.5°	1	4 3/	4	12	N
0723	1723	22.5°	1	4 3/	4	13	N
0724	1724	22.5°	1	4 3/	4	14	N
0725	1725	22.5°	1	4 3/	4	15	N
0726	1726	22.5°	1	4 3/	4	16 1/	N
0727	1727	22.5°	1	5 3/	5	9	N
0728	1728	22.5°	1	5 3/	5	10	N
0729	1729	22.5°	1	5 3/	5	11	N
0730	1730	22.5°	1	5 3/	5	12	N
0731	1731	22.5°	1	5 3/	5	13	N
0732	1732	22.5°	1	5 3/	5	14	N
0733	1733	22.5°	1	5 3/	5	15	N
0734	1734	22.5°	1	5 3/	5	16 1/	N
0735	1735	15°	4	1 2/	4	2	N
0736	1736	15°	4	1 2/	4	3	N
0737	1737	15°	4	1 2/	4	4	N
0738	1738	15°	4	1 2/	4	5	N
0739	1739	15°	4	2 3/	8	2	N
0740	1740	15°	4	2 3/	8	3	N
0741	1741	15°	4	2 3/	8	4	N
0742	1742	15°	4	2 3/	8	5	N
0743	1743	15°	2	1 2/	2	6	N
0744	1744	15°	2	1 2/	2	7	N
0745	1745	15°	2	1 2/	2	8	N
0746	1746	15°	2	1 2/	2	9	N
0747	1747	15°	2	1 2/	2	10	N
0748	1748	15°	2	1 2/	2	11	N
0749	1749	15°	2	2 3/	4	6	N
0750	1750	15°	2	2 3/	4	7	N
0751	1751	15°	2	2 3/	4	8	N
0752	1752	15°	2	2 3/	4	9	N
0753	1753	15°	2	2 3/	4	10	N
0754	1754	15°	2	2 3/	4	11	N
0755	1755	15°	2	3 3/	6	6	N
0756	1756	15°	2	3 3/	6	7	N
0757	1757	15°	2	3 3/	6	8	N
0758	1758	15°	2	3 3/	6	9	N
0759	1759	15°	2	3 3/	6	10	N
0760	1760	15°	2	3 3/	6	11	N
0761	1761	15°	2	4 3/	8	6	N
0762	1762	15°	2	4 3/	8	7	N
0763	1763	15°	2	4 3/	8	8	N
0764	1764	15°	2	4 3/	8	9	N
0765	1765	15°	2	4 3/	8	10	N
0766	1766	15°	2	4 3/	8	11	N
0767	1767	15°	1	1 2/	1	12	N
0768	1768	15°	1	1 2/	1	13	N
0769	1769	15°	1	1 2/	1	14	N
0770	1770	15°	1	1 2/	1	15	N
0771	1771	15°	1	1 2/	1	16	N
0772	1772	15°	1	1 2/	1	17	N
0773	1773	15°	1	1 2/	1	18	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0774	1774	15°	1	1 2/	1	19	N
0775	1775	15°	1	1 2/	1	20	N
0776	1776	15°	1	1 2/	1	21	N
0777	1777	15°	1	1 2/	1	22	N
0778	1778	15°	1	1 2/	1	23	N
0779	1779	15°	1	1 2/	1	24 1/	N
0780	1780	15°	1	2 3/	2	12	N
0781	1781	15°	1	2 3/	2	13	N
0782	1782	15°	1	2 3/	2	14	N
0783	1783	15°	1	2 3/	2	15	N
0784	1784	15°	1	2 3/	2	16	N
0785	1785	15°	1	2 3/	2	17	N
0786	1786	15°	1	2 3/	2	18	N
0787	1787	15°	1	2 3/	2	19	N
0788	1788	15°	1	2 3/	2	20	N
0789	1789	15°	1	2 3/	2	21	N
0790	1790	15°	1	2 3/	2	22	N
0791	1791	15°	1	2 3/	2	23	N
0792	1792	15°	1	2 3/	2	24 1/	N
0793	1793	15°	1	3 3/	3	12	N
0794	1794	15°	1	3 3/	3	13	N
0795	1795	15°	1	3 3/	3	14	N
0796	1796	15°	1	3 3/	3	15	N
0797	1797	15°	1	3 3/	3	16	N
0798	1798	15°	1	3 3/	3	17	N
0799	1799	15°	1	3 3/	3	18	N
0800	1800	15°	1	3 3/	3	19	N
0801	1801	15°	1	3 3/	3	20	N
0802	1802	15°	1	3 3/	3	21	N
0803	1803	15°	1	3 3/	3	22	N
0804	1804	15°	1	3 3/	3	23	N
0805	1805	15°	1	3 3/	3	24 1/	N
0806	1806	15°	1	4 3/	4	12	N
0807	1807	15°	1	4 3/	4	13	N
0808	1808	15°	1	4 3/	4	14	N
0809	1809	15°	1	4 3/	4	15	N
0810	1810	15°	1	4 3/	4	16	N
0811	1811	15°	1	4 3/	4	17	N
0812	1812	15°	1	4 3/	4	18	N
0813	1813	15°	1	4 3/	4	19	N
0814	1814	15°	1	4 3/	4	20	N
0815	1815	15°	1	4 3/	4	21	N
0816	1816	15°	1	4 3/	4	22	N
0817	1817	15°	1	4 3/	4	23	N
0818	1818	15°	1	4 3/	4	24 1/	N
0819	1819	15°	1	5 3/	5	12	N
0820	1820	15°	1	5 3/	5	13	N
0821	1821	15°	1	5 3/	5	14	N
0822	1822	15°	1	5 3/	5	15	N
0823	1823	15°	1	5 3/	5	16	N
0824	1824	15°	1	5 3/	5	17	N
0825	1825	15°	1	5 3/	5	18	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0826	1826	15°	1	5 3/	5	19	N
0827	1827	15°	1	5 3/	5	20	N
0828	1828	15°	1	5 3/	5	21	N
0829	1829	15°	1	5 3/	5	22	N
0830	1830	15°	1	5 3/	5	23	N
0831	1831	15°	1	5 3/	5	24 1/	N
0832	1832	11.25°	4	1 2/	4	2	N
0833	1833	11.25°	4	1 2/	4	3	N
0834	1834	11.25°	4	1 2/	4	4	N
0835	1835	11.25°	4	1 2/	4	5	N
0836	1836	11.25°	4	1 2/	4	6	N
0837	1837	11.25°	4	1 2/	4	7	N
0838	1838	11.25°	4	2 3/	8	2	N
0839	1839	11.25°	4	2 3/	8	3	N
0840	1840	11.25°	4	2 3/	8	4	N
0841	1841	11.25°	4	2 3/	8	5	N
0842	1842	11.25°	4	2 3/	8	6	N
0843	1843	11.25°	4	2 3/	8	7	N
0844	1844	11.25°	2	1 2/	2	8	N
0845	1845	11.25°	2	1 2/	2	9	N
0846	1846	11.25°	2	1 2/	2	10	N
0847	1847	11.25°	2	1 2/	2	11	N
0848	1848	11.25°	2	1 2/	2	12	N
0849	1849	11.25°	2	1 2/	2	13	N
0850	1850	11.25°	2	1 2/	2	14	N
0851	1851	11.25°	2	1 2/	2	15	N
0852	1852	11.25°	2	2 3/	4	8	N
0853	1853	11.25°	2	2 3/	4	9	N
0854	1854	11.25°	2	2 3/	4	10	N
0855	1855	11.25°	2	2 3/	4	11	N
0856	1856	11.25°	2	2 3/	4	12	N
0857	1857	11.25°	2	2 3/	4	13	N
0858	1858	11.25°	2	2 3/	4	14	N
0859	1859	11.25°	2	2 3/	4	15	N
0860	1860	11.25°	2	3 3/	6	8	N
0861	1861	11.25°	2	3 3/	6	9	N
0862	1862	11.25°	2	3 3/	6	10	N
0863	1863	11.25°	2	3 3/	6	11	N
0864	1864	11.25°	2	3 3/	6	12	N
0865	1865	11.25°	2	3 3/	6	13	N
0866	1866	11.25°	2	3 3/	6	14	N
0867	1867	11.25°	2	3 3/	6	15	N
0868	1868	11.25°	2	4 3/	8	8	N
0869	1869	11.25°	2	4 3/	8	9	N
0870	1870	11.25°	2	4 3/	8	10	N
0871	1871	11.25°	2	4 3/	8	11	N
0872	1872	11.25°	2	4 3/	8	12	N
0873	1873	11.25°	2	4 3/	8	13	N
0874	1874	11.25°	2	4 3/	8	14	N
0875	1875	11.25°	2	4 3/	8	15	N
0876	1876	11.25°	1	1 2/	1	16	N
0877	1877	11.25°	1	1 2/	1	17	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0878	1878	11.25°	1	1 2/	1	18	N
0879	1879	11.25°	1	1 2/	1	19	N
0880	1880	11.25°	1	1 2/	1	20	N
0881	1881	11.25°	1	1 2/	1	21	N
0882	1882	11.25°	1	1 2/	1	22	N
0883	1883	11.25°	1	1 2/	1	23	N
0884	1884	11.25°	1	1 2/	1	24	N
0885	1885	11.25°	1	1 2/	1	25	N
0886	1886	11.25°	1	1 2/	1	26	N
0887	1887	11.25°	1	1 2/	1	27	N
0888	1888	11.25°	1	1 2/	1	28	N
0889	1889	11.25°	1	1 2/	1	29	N
0890	1890	11.25°	1	1 2/	1	30	N
0891	1891	11.25°	1	1 2/	1	31	N
0892	1892	11.25°	1	1 2/	1	32 1/	N
0893	1893	11.25°	1	2 3/	2	16	N
0894	1894	11.25°	1	2 3/	2	17	N
0895	1895	11.25°	1	2 3/	2	18	N
0896	1896	11.25°	1	2 3/	2	19	N
0897	1897	11.25°	1	2 3/	2	20	N
0898	1898	11.25°	1	2 3/	2	21	N
0899	1899	11.25°	1	2 3/	2	22	N
0900	1900	11.25°	1	2 3/	2	23	N
0901	1901	11.25°	1	2 3/	2	24	N
0902	1902	11.25°	1	2 3/	2	25	N
0903	1903	11.25°	1	2 3/	2	26	N
0904	1904	11.25°	1	2 3/	2	27	N
0905	1905	11.25°	1	2 3/	2	28	N
0906	1906	11.25°	1	2 3/	2	29	N
0907	1907	11.25°	1	2 3/	2	30	N
0908	1908	11.25°	1	2 3/	2	31	N
0909	1909	11.25°	1	2 3/	2	32 1/	N
0910	1910	11.25°	1	3 3/	3	16	N
0911	1911	11.25°	1	3 3/	3	17	N
0912	1912	11.25°	1	3 3/	3	18	N
0913	1913	11.25°	1	3 3/	3	19	N
0914	1914	11.25°	1	3 3/	3	20	N
0915	1915	11.25°	1	3 3/	3	21	N
0916	1916	11.25°	1	3 3/	3	22	N
0917	1917	11.25°	1	3 3/	3	23	N
0918	1918	11.25°	1	3 3/	3	24	N
0919	1919	11.25°	1	3 3/	3	25	N
0920	1920	11.25°	1	3 3/	3	26	N
0921	1921	11.25°	1	3 3/	3	27	N
0922	1922	11.25°	1	3 3/	3	28	N
0923	1923	11.25°	1	3 3/	3	29	N
0924	1924	11.25°	1	3 3/	3	30	N
0925	1925	11.25°	1	3 3/	3	31	N
0926	1926	11.25°	1	3 3/	3	32 1/	N
0927	1927	11.25°	1	4 3/	4	16	N
0928	1928	11.25°	1	4 3/	4	17	N
0929	1929	11.25°	1	4 3/	4	18	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Part no. M3786/40- Construction: N	Part no. M3786/40- Construction: S	Angle of throw	Poles per deck	No. of decks	No. of poles	Pos. per pole	Switch characteristic N or S
0930	1930	11.25°	1	4 3/	4	19	N
0931	1931	11.25°	1	4 3/	4	20	N
0932	1932	11.25°	1	4 3/	4	21	N
0933	1933	11.25°	1	4 3/	4	22	N
0934	1934	11.25°	1	4 3/	4	23	N
0935	1935	11.25°	1	4 3/	4	24	N
0936	1936	11.25°	1	4 3/	4	25	N
0937	1937	11.25°	1	4 3/	4	26	N
0938	1938	11.25°	1	4 3/	4	27	N
0939	1939	11.25°	1	4 3/	4	28	N
0940	1940	11.25°	1	4 3/	4	29	N
0941	1941	11.25°	1	4 3/	4	30	N
0942	1942	11.25°	1	4 3/	4	31	N
0943	1943	11.25°	1	4 3/	4	32 1/	N
0944	1944	11.25°	1	5 3/	5	16	N
0945	1945	11.25°	1	5 3/	5	17	N
0946	1946	11.25°	1	5 3/	5	18	N
0947	1947	11.25°	1	5 3/	5	19	N
0948	1948	11.25°	1	5 3/	5	20	N
0949	1949	11.25°	1	5 3/	5	21	N
0950	1950	11.25°	1	5 3/	5	22	N
0951	1951	11.25°	1	5 3/	5	23	N
0952	1952	11.25°	1	5 3/	5	24	N
0953	1953	11.25°	1	5 3/	5	25	N
0954	1954	11.25°	1	5 3/	5	26	N
0955	1955	11.25°	1	5 3/	5	27	N
0956	1956	11.25°	1	5 3/	5	28	N
0957	1957	11.25°	1	5 3/	5	29	N
0958	1958	11.25°	1	5 3/	5	30	N
0959	1959	11.25°	1	5 3/	5	31	N
0960	1960	11.25°	1	5 3/	5	32 1/	N

1/ Continuous rotation (no stops)
2/ PC terminals
3/ Rear deck has PC terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced Documents:
MIL-DTL-3786
MS25082
NASM35333

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5930-1872)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:41Z
Check the source to verify that this is the current version before use.