MIL-S-3786/33A
10 December 1981
SUPERSEDING
MIL-S-3786/33
18 December 1968


MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, CLOSED CONSTRUCTION, 1-1/2-INCH O.D., 2 AMPERE, STYLE SR

Ⓐ INACTIVE FOR NEW DESIGN AFTER 10 December 1981.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of Specification MIL-S-3786.

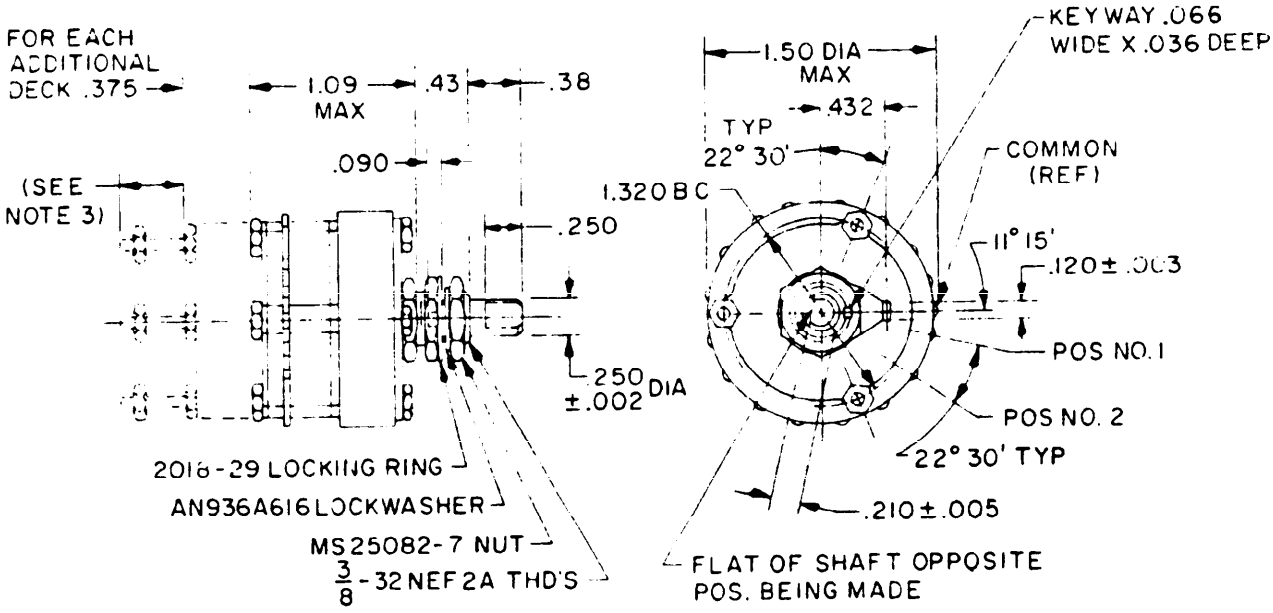

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.120	3.05	.43	10.92
.003	.08	.210	5.33	.432	10.97
.005	.13	.250	6.35	1.09	27.69
.036	.91	.375	9.53	1.320	33.53
.090	2.29	.38	9.65	1.50	38.10

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.010 (.25 mm), ±.03 (.76 mm) and ±2° on angles.
3. Recommended for 6 decks or more. .312 (7.92 mm) min. thru bolt ext. 1-72 thread on 1.320 (33.53 mm) bolt circle.
4. Available with multipole per deck construction; 1, 2, and 4 poles
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.

FSC 5930

REQUIREMENTS:

Dimensions and configuration: See figure.

Enclosure design: B, D, or E.

Torque (stops): Stops shall be set in a clockwise direction from position 1 only, when viewed from the shaft end. Stops, when supplied, shall withstand a 25 pound-inch torque.

Rotational torque: The minimum and maximum values of torque determined for shaft rotation shall be within the limits specified in table I. The rotational torque shall not change more than 50 percent from its initial value and shall not be less than the minimum torque specified.

TABLE I. Rotational-torque limits.

Temperature	Torque (lb-in)	
	Minimum	Maximum
Room	2	8
Minimum	2	10

Life (rotational): The test loads for the applicable circuit conditions shall be as specified in table II. Each of the loads, specified for the applicable environmental condition, shall be switched by at least one rotor contact of the switch.

TABLE II. Circuit values for life (rotational) test.

Environmental condition	Inductive load (2.8 Henries)		Resistive load	
	Amperes	Volts, dc	Amperes	Volts
At atmospheric pressure and elevated temperature (125°C)	.200	28	2 1	28 dc 115 vrms
At reduced barometric pressure (125°C)	.050	28	.2 .05	28 dc 115 vrms
At atmospheric pressure and room temperature (approx. 25°C)	.500	28	2.5 1.5	28 dc 115 vrms
At reduced barometric pressure (approx. 25°C)	.250	28	.5 .1	28 dc 115 vrms

Contact resistance: Contact resistance initially shall not exceed 10 milliohms, but not to exceed 50 milliohms after life.

Degree of indexing: 22-1/2° - (16 positions, 1 pole), (8 positions, 2 pole), (4 positions, 4 pole).

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:39Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV, SM
Navy - MC, CG
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1181-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Enclosure design: B, D, or E.

Torque (stops): Stops shall be set in a clockwise direction from position 1 only, when viewed from the shaft end. Stops, when supplied, shall withstand a 25 pound-inch torque.

Rotational torque: The minimum and maximum values of torque determined for shaft rotation shall be within the limits specified in table I. The rotational torque shall not change more than 50 percent from its initial value and shall not be less than the minimum torque specified.

TABLE I. Rotational-torque limits.

Temperature	Torque (lb-in)	
	Minimum	Maximum
Room	2	8
Minimum	2	10

Life (rotational): The test loads for the applicable circuit conditions shall be as specified in table II. Each of the loads, specified for the applicable environmental condition, shall be switched by at least one rotor contact of the switch.

TABLE II. Circuit values for life (rotational) test.

Environmental condition	Inductive load (2.8 Henries)		Resistive load	
	Amperes	Volts, dc	Amperes	Volts
At atmospheric pressure and elevated temperature (125°C)	.200	28	2 1	28 dc 115 vrms
At reduced barometric pressure (125°C)	.050	28	.2 .05	28 dc 115 vrms
At atmospheric pressure and room temperature (approx. 25°C)	.500	28	2.5 1.5	28 dc 115 vrms
At reduced barometric pressure (approx. 25°C)	.250	28	.5 .1	28 dc 115 vrms

Contact resistance: Contact resistance initially shall not exceed 10 milliohms, but not to exceed 50 milliohms after life.

Degree of indexing: 22-1/2° - (16 positions, 1 pole), (8 positions, 2 pole), (4 positions, 4 pole).

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-3786/33A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 20260-16T21:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:39Z
Check the source to verify that this is the current version before use.