MILITARY SPECIFICATION SHEET

ELECTRON TUBE, IMAGE CONVERTER

Ⓕ TYPE 6914

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the electron tubes described herein shall consist of this specification and the latest issue of MIL-E-1.

Ⓕ DESCRIPTION: Infrared sensitive (S1 photocathode surface; P-20 phosphor image screen).

See figure 1.

Weight: 3 ounces (85 grams) nominal.

Mounting position: Any.

Ⓕ ABSOLUTE RATINGS:

Parameter:	Eb	Light flux	ib (see note 2)	Ib	Rb	TA
Unit:	kV dc	lux	µA dc	µA dc	MΩ	°C
Maximum:	16	---	3.5	0.35	---	68
Minimum:	---	---	---	---	---	-54
TEST CONDITIONS:	16	See note 1	---	---	100	20 to 23

GENERAL:

Qualification - Required

Holding period - See note 4

Stabilization - See note 3

Ⓕ denotes changes

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:04Z
Check the source to verify that this is the current version before use.

Method	Requirement or test	Conditions	AQL (percent defective)	Inspection level or code	Symbol	Limits		Unit
						Min	Max	
	Quality conformance inspection, part 1							
---	Shock	See note 6	---	---	---	---	---	---
---	Irradiation surge	See note 7	---	---	---	---	---	---
---	Conversion index	See note 8	---	---	CI	15	---	---
---	Conversion index decay	See notes 4 and 5	---	---	---	---	---	---
---	Conversion index to background	See notes 5 and 9	---	---	CI/B	4	---	---
---	Alinement and image shift	See note 10	---	---	---	---	---	---
---	Center resolution	See notes 11 and 12	---	---	Res	50	---	1-p/mm
---	Peripheral resolution	See notes 11 and 12	---	---	Res	12	---	1-p/mm
---	Center magnification	See note 13	---	---	Cmx	0.742	0.790	---
---	Distortion	See note 14	---	---	---	9	13	%
---	Cathode and screen spots	See notes 5 and 15	---	---	---	---	---	---
---	Breakdown	See notes 5 and 16	---	---	---	---	---	---
---	Dark current	Light flux = 0 (see notes 5 and 17)	---	---	Ilk	---	0.02	µA
	Quality conformance inspection, part 2							
---	Cathode and screen uniformity	See note 18	2.5	I	---	---	---	---
---	Vibration (1)	See notes 19 and 22	1	II	---	---	---	---
---	Vibration (2)	See notes 20 and 22	2.5	S3	---	---	---	---
---	Temperature cycling and thermal shock	See notes 21 and 22	1	II	---	---	---	---
1105	Permanence of marking		---	---	---	---	---	---

NOTES:

1. Unless otherwise specified, the radiation source shall be a tungsten filament lamp operated at a color temperature of 2,854°K. A Corning No. 2540 filter (melt No. 1613, of 2.61 mm thickness), or equivalent, shall be placed between the radiation source and the photocathode. The quantity of radiation from the source incident on the photocathode for the individual tests shall be the amount stated in the note describing the particular test.

2. The period of time of ib for any single period shall not exceed 2 minutes, and the tube shall not be subjected to more than 10 such periods during its life.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

3. The tube shall be held for a manufacturer's stabilizing period of at least 2 weeks. Prior to this period, the temperature, vibration, and shock tests shall be made; at the end of the 2-week period, the irradiation surge and initial conversion index tests shall be made in the order listed. (See note 4.)

4. After a holding period of 672 hours, which shall not include the manufacturer's stabilizing period of at least 336 hours, the conversion index of the tube shall not be less than 15, and shall not have slumped more than 20 percent from the initial value measured at the end of the stabilizing period. If the conversion index has slumped more than 20 percent, but still is above the minimum value of 15, the tube shall be held an additional 2 weeks. At the end of the 6-week period, the tube shall have a conversion index of not less than 15 and shall not have slumped more than 30 percent of the initial value. After completing the above conversion index test, the manufacturer shall have a period of 24 hours to screen out tubes he feels do not meet the requirements specified herein.

5. This test to be performed at the conclusion of the holding period.

(F) 6. Upon completion of the vibration (1) test specified, each tube, in a proper holder, shall be energized with 16 kilovolts for a stabilization period of 15 seconds in a darkened room (not more than 0.01 footcandle (0.11 lux)). At the end of this period, with the tube still energized and no incident light on the photocathode, it shall be subjected to shock impacts in the following manner:

The shock impacts shall be applied in a way to generate nominal half-sine wave pulses having a minimum of 75 G's at the peak. The duration of each shock pulse shall be 6 ±2 milliseconds measured between the 10 percent values of the peak amplitude. The energy under the shock curve shall be not less than 0.25 G second and the after oscillations shall be not greater than 15 percent of the peak amplitude of the nominal half-sine wave pulse. The tube shall be subjected to six shock pulses parallel to, and six shock pulses perpendicular to, its longitudinal axis. Presence of flashing or electrical bursting during more than two shocks in each direction shall be cause for rejection.

7. The image tube shall be subjected to an irradiation surge by exposing the photocathode to radiation from a tungsten light source (which need not be the one specified in note 1) for a period of at least 5 seconds to produce a minimum of 3.5 μA of photocathode current. The image of the source on the screen of the tube shall not disintegrate nor shall any part of the image darken or be blanked out during the irradiation surge.

(F) 8. The radiation source, specified in note 1, shall be used to produce a circular image 3/4 inch (19.05 mm) in diameter on the center of the photocathode. The amount of incident flux on the photocathode (prior to interposing the filter) shall be 0.01 ±0.0005 lux. The light output of the tube shall be read with a Weston Model 856 RRV photronic cell, or equivalent, provided with a Viscor filter and truncated lucite cone. The cone shall be 1.562 inches (39.67 mm) in diameter at its base, 1.125 inches (28.58 mm) in diameter at its top, and 1.6875 inches (42.86 mm) in height. The base of the cone shall be cemented to the photronic cell window. The cone top shall be in contact with the image screen of the tube. The photronic cell and cone shall be precalibrated from a diffused light source. The small end of the cone shall be placed to cover the excited area of the image screen. The conversion index is defined as:

$$CI = F_1/F_2T$$

F_1 is the total available luminous flux emitted by the phosphor screen of the tube at the operating voltage specified.

F_2 is the unfiltered flux from the 2,854°K light source incident on the photocathode of the tube.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:04Z
Check the source to verify that this is the current version before use.

T is the filter factor of a calibrated Corning No. 2540 (melt number 1613, 2.61 mm thickness) infrared filter, or equivalent, interposed between the light source and photocathode. This filter factor is the percentage of 2,854°K hololumen flux transmitted by the infrared filter and is determined by the following:

$$T = \frac{\int_0^\infty R\lambda \; J\lambda \; t\lambda \; d\lambda}{\int_0^\infty R\lambda \; J\lambda \; d\lambda}$$

Where $R\lambda$ = The relative spectral response of an EIA S-1 photosurface.

$J\lambda$ = The relative spectral distribution of the 2,854°K color temperature radiation source.

$t\lambda$ = The spectral transmission of the infrared filter.

$d\lambda$ = The differential of the wavelength of the radiation.

Ⓕ 9. The radiation source and filter specified in note 1 shall be used. The source shall be adjusted to produce a 3/4-inch (19.05 mm) diameter circle image on the center of the photocathode. The amount of radiation incident on the photocathode (prior to interposing the filter) shall be 0.01 ±0.0005 lux. The 5819 or 1P21 photomultiplier shall be adjusted to give 227 microamperes of anode current. The radiation from the source shall then be excluded from the photocathode and the brightness shall be read in terms of anode current (LB) of the photomultiplier tube. The ratio of conversion index to background (CI/B) = 1.00/LB.

10. After the completion of the vibration, shock, and temperature tests specified, the resolution pattern described on figure 2 shall be focused on the photocathode and the image of the pattern observed on the screen of the tube with a 10 power microscope. The microscope shall be alined with the geometric axis of the tube (which shall be the center line of the 1.680 inch (42.69 mm) diameters at each end of the tube as shown on figure 1) and it shall be focused for best resolution of the test pattern image. With the microscope focused and alined with the tube operating at normal voltage, a test spot shall then be projected on the center (tube axis) of the photocathode and the image of the spot shall be observed on the screen. The center of the test spot image shall fall on the screen within a 0.045 inch (1.14 mm) radius circle concentric with the tube axis. Following the alinement test, the position of the center of this image shall be recorded. After application of electrical shock, resulting from 10 cycles of alternate periods of 15 seconds with and 10 seconds without application of the rated tube voltage, the center of the above image shall not displace more than 0.0025-inch (0.06 mm) in any direction from its initially recorded position.

11. This test shall be performed with a 10 power or greater microscopic monocular; a tungsten radiation source and infrared filter (which need not be the source and filter specified in note 1), a resolution test pattern, and a condenser lens system to project the resolution test pattern upon the image tube photocathode. The test pattern shall be placed between the radiation source and the filter and shall be focused on the photocathode for best equal resolution of line sets in the central area of the image tube screen. The input radiation level shall be adjusted by the operator to obtain best contrast of the resolution patterns. The image shall be resolved when all lines in each resolution group can be counted. The resolution test pattern shall be projected 1:1 on the photocathode of the tube. (Projection other than 1:1 may be used provided the chart size is such that the projected image on the photocathode meets the requirements of notes 12 or 13, as applicable.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

12. The resolution pattern for this test, shown on figure 2, shall consist of 3 groups (marked 12, 50, and 12). In the center resolution group, marked 50, each set of lines shall have 8 black lines with a minimum length-to-width ratio of 15 to 1. In the peripheral groups, marked 12, each set of lines shall have 5 black lines with a minimum length-to-width ratio of 5 to 1. The width of each black line and the distance between the black lines in the group marked 50 shall be 0.01 mm. The width of each black line and the distance between the black lines in the two groups marked 12 shall be 0.04 mm. The arrangement and orientation of the groups and the sets of lines in each group shall be as shown on figure 2.

13. Magnification is defined as the ratio of the separation of the two image points to the separation of corresponding object points; the latter being located on a diameter and equidistant from the tube axis. Paraxial magnification is obtained only if the object points are very close to the tube axis. Center magnification (Cmx) is a close approximation to paraxial magnification and shall be measured with a nominal chordal separation of object points of 20 ±0.4 percent of the useful minimum cathode diameter. The object points shall be projected on the photocathode with nominal monochromatic visible light.

14. A second magnification measurement shall be made to determine the percentage of distortion. The procedure used to determine the center magnification (see note 13) shall be used except, the spacing of the points or lines on the photocathode which shall have a separation of 80 ±0.4 percent of the useful minimum cathode diameter. Percentage distortion shall be determined by the following formula:

$$D = \frac{M_2 - M_1}{M_1} \times 100$$

Where:

D = Percentage distortion.

M_1 = Magnification obtained in center magnification test.

M_2 = Second magnification determined as above.

15. The Universal Standard Image Tube Tester Assembly F8584978, or equivalent, shall be used for this test. When the tube screen is observed with a 2.5 power magnifier and with no radiation incident on photocathode, there shall be no ion spots or cold emission that appear as bright streaks or blemishes. When the screen is viewed through a 10 power microscope and with the radiation level on the photocathode adjusted to obtain the best spot contrast, the opaque or dark spots shall not exceed the size and quantities shown:

Size of spots 1/ (inches)	Number of spots within 0.3-inch (7.62 mm) diameter circle 2/	Number of spots, within area bounded by two circles (0.30 (7.62 mm) and 0.86 inches (21.84 mm) in diameter 2/
Greater than 0.012 (0.30 mm)	0	0
0.009 to 0.012 (0.23 to 0.30 mm)	0	2
0.006 to 0.012 (0.15 to 0.30 mm)	0	12
0.002 to 0.012 (0.05 to 0.30 mm)	0	32

1/ If the distance between two spots is less than the maximum dimension of either spot, they shall be considered as one spot with a size equal to the sum of the maximum dimensions of the two spots plus the amount of separation between them.

2/ The 0.30 (7.62 mm) and 0.86-inch (21.84 mm) circles on the image screen shall be concentric with the tube axis.

Source: https://assist.dla.mil -- Downloaded: 2026l0-15T14:04Z
Check the source to verify that this is the currentversion before use.

16. Apply 18 kilovolts for 10 seconds. The tube shall be rejected for intermittent or continuous arcing.

17. To measure total tube dark current I_{dk}, a microammeter shall be connected in series with the grounding terminal of the tube. This test shall be performed in an atmospheric environment of 40 to 50 percent relative humidity.

18. The background shading shall be uniformly graded so that there is no line of demarcation between light and dark areas. Two tests shall be performed.

    a. With no radiation incident on the photocathode.

    b. With the radiation uniformly distributed over the photocathode produced by filtering through Corning filter No. 2540, 0.1 to 0.4 lumens/sq ft from a tungsten source operating at a color temperature of 2,854°K.

19. The tubes shall be rigidly mounted, singly or in groups, in a vertical position with the cathode end up, and subjected to a simple harmonic motion having an amplitude of not less than 1/16 inch (1.59 mm) (total excursion 1/8-inch (3.18 mm)), at a frequency of 30 Hz, for a period of 2-1/2 minutes. No voltage potential shall be applied to the tube during the above vibration test. Any tube submitted for qualification shall be tested only once, after which a certification that the vibration test has been performed shall be issued.

20. The tubes shall be rigidly mounted, singly or in groups, in a vertical position with the cathode end up, and subjected to a simple harmonic motion having an amplitude of not less than 0.04 ±0.0025 inch (1.02 ±0.06 mm) (total excursion 0.08 ±0.005 inch (2.03 ±0.13 mm)) at a frequency of 50 ±2 Hz, for a period of 2 minutes. No voltage potential shall be applied to the tube during the above vibration test.

21. The tube shall be placed in a test chamber and internal temperature of the chamber raised gradually to 68°C. After not less than 1-hour at 68°C, the chamber temperature shall be lowered to 52°C and held for at least 1-hour. At the end of this period, the tube shall be removed immediately to room temperature (approximately 22°C) and shall remain at this temperature for not less than 1-hour. At the end of this period, the tube shall be replaced in the test chamber and the internal temperature of the chamber lowered gradually to minus 54°C. After not less than 1-hour at minus 54°C, the chamber shall be raised to minus 32°C and held for not less than 1-hour. At the end of this period, the tube shall be removed immediately to room temperature (approximately 22°C). Evidence of deformation, cracks, or breakage shall constitute failure of this test.

22. The following post environmental tests shall be performed and shall meet test limits specified in quality conformance inspection, part 1: conversion index, conversion index to background, alinement and image shift, center resolution, cathode and screen spots, breakdown, dark current, and threshold sensitivity.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Preparing activity:
Navy - EC


(Project 5960-3333)

Review activities:
Air Force - 17
DLA - ES

User activities:
Army - AR
Navy - AS, MC, CG, SH
Air Force - 11, 19

Agent:
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 202640-15T14:04Z
Check the source to verify that this is the current version before use.

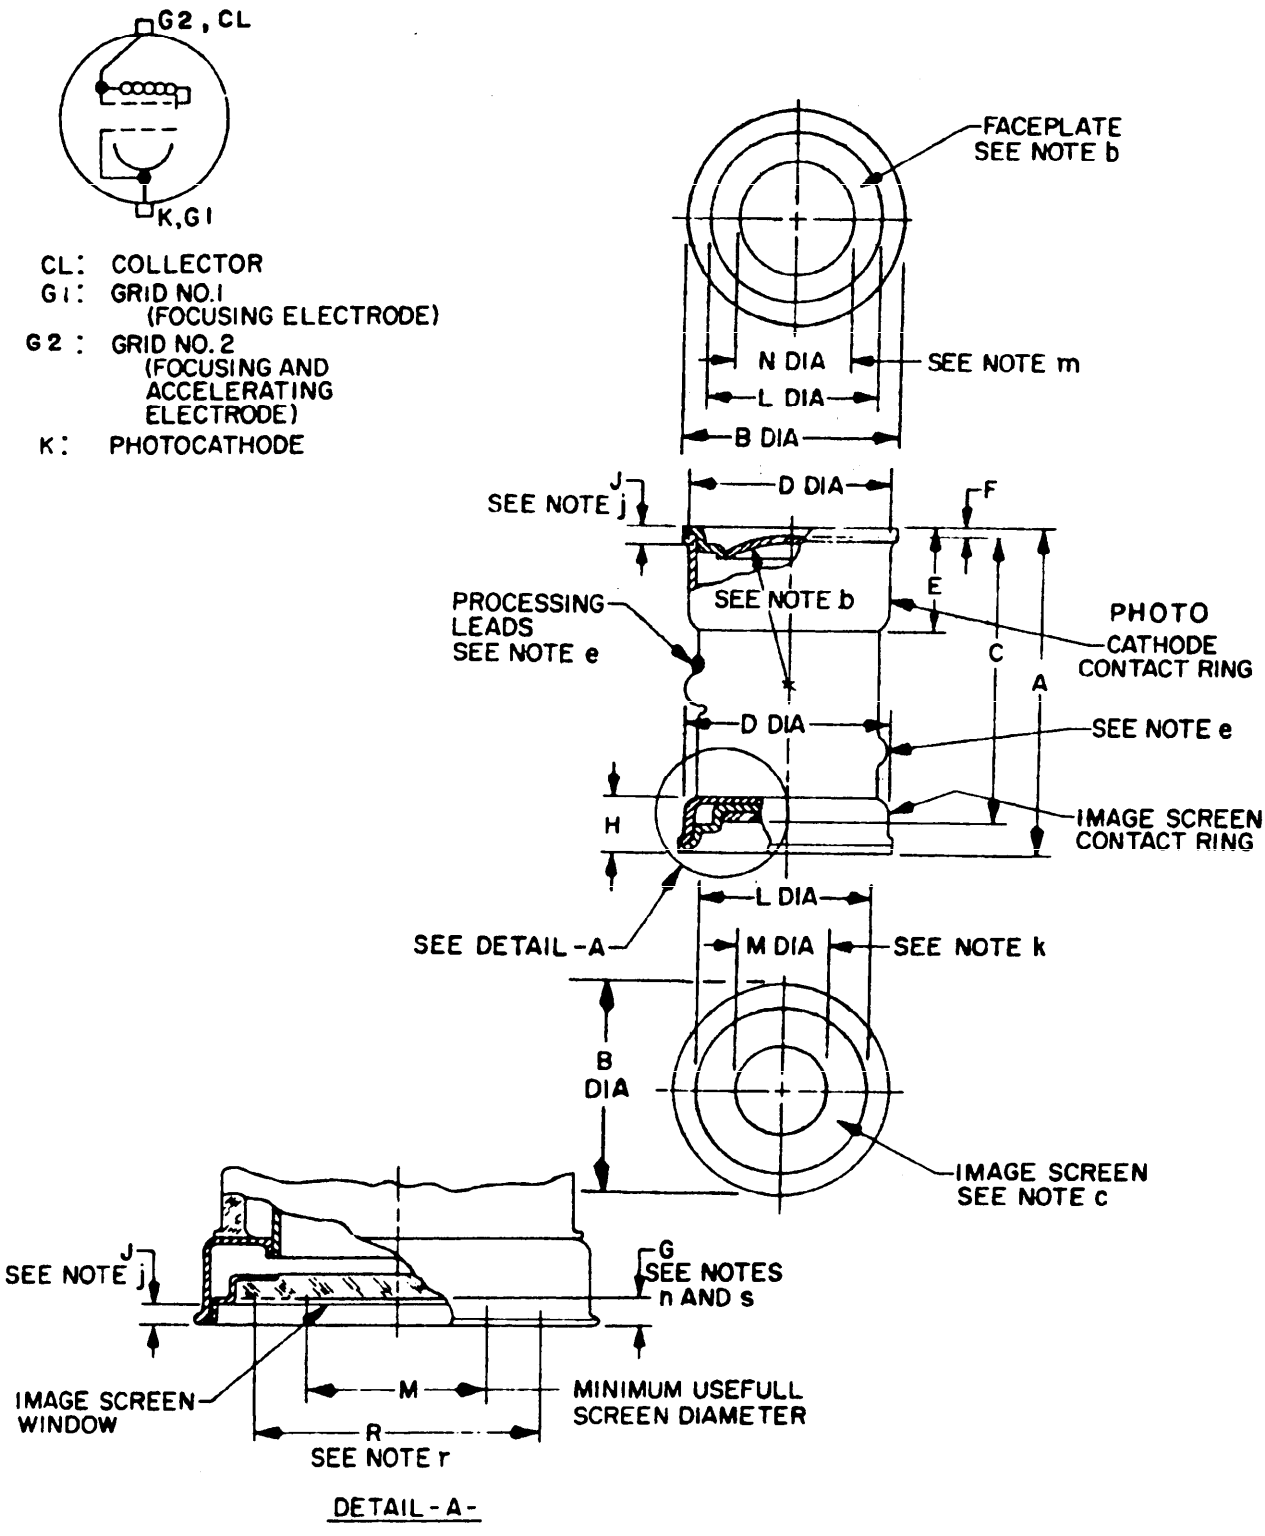

(F) FIGURE 1. Outline drawing of electron tube type 6914.


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	2.875 (73.03)	2.975 (75.57)
B	1.855 (47.13)	1.905 (48.39)
C	2.650 (67.31)	2.768 (70.31)
F	.068 (1.73)	.128 (3.25)
G	.090 (2.29)	.150 (3.81)
L	1.680 (42.67)	1.694 (43.03)
Reference dimensions (see note a)		
D	1.796 (45.62)max	
E	.900 (22.86)design center	
H	.400 (10.16)design center	
J	.120 (3.05)design center	
M	.860 (21.84)	
N	1.000 (25.40)	

NOTES:
a. These dimensions are for information only and are not required for inspection purposes.
b. Faceplate dimensions (see note p).
Radius of curvature (inside and outside) shall be 2.33(59.18 mm) min and 2.43(61.72 mm) max.
Thickness at center shall be .061(1.55 mm) min and .069(1.75 mm) max.
Variation in edge thickness shall be .004(.10 mm) max.
c. Image screen dimensions (see note p).
Thickness at center shall be .095(2.41 mm) min and .105(2.67 mm) max.
Variation in edge thickness shall be .010(.25 mm) max.
d. Refractive index for faceplate and image screen glass shall be 1.49±.04 (37.85±1.02 mm).
e. No part of that portion of the tube included between metal contact ring shall protrude beyond dimension B.
f. Tube axis is established by centerline through dimension L.
g. The following ratio shall govern dimensions A, C, F, and G: A min≤C+F+G≤A max.
h. All exposed metal parts shall be nickel plated.
j. Dimension J measures depth to bearing surface of metal shoulder.
k. Minimum useful image screen diameter.
m. Minimum useful cathode diameter.
n. Depth to outside surface of image screen window.
p. Faceplate and image screen dimensions are for guidance on component parts. Conformance check of these dimensions shall be made prior to tube assembly.
r. No glass or other protuberance permitted inside minimum diameter R, protuberance beyond this diameter shall not exceed .031(.79 mm) deviation from flatness of external surface of image screen within a minimum diameter of 1.260(32.00 mm) shall not exceed .002(.05 mm) from peak to valley.
s. Dimension G applies over 1.260(32.00 mm) diameter only.

(F) FIGURE 1. Outline drawing of electron tube type 6914 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

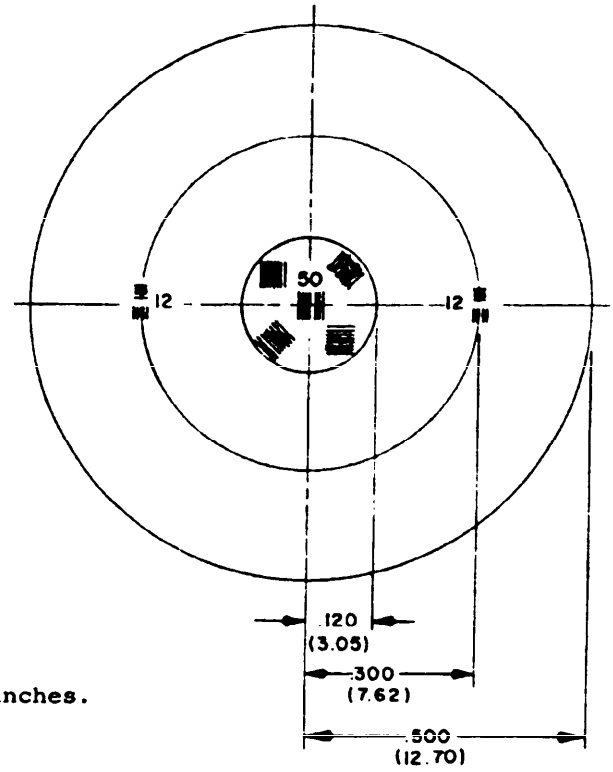

NOTE:
Dimensions are in inches.

(F) FIGURE 2. Resolution pattern for type 6914.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: **In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.**

NOTE: **This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.**

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-E-1/1049F	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.