INCH-POUND

MIL-E-1/1049F
AMENDMENT 1
14 March 1992

MILITARY SPECIFICATION SHEET


ELECTRON TUBE, IMAGE CONVERTER
TYPE 6914

This amendment forms a part of MIL-E-1/1049F, dated 10 April 1984, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

Note 15, delete and substitute:

"The test equipment used for this test shall be approved by the qualifying activity prior to the start of testing. When the tube screen is observed with a 2.5 power magnifier and with no radiation incident on photocathode, there shall be no ion spots or cold emission that appear as bright streaks or blemishes. Spots less than .0008 inch (0.020 mm) in diameter will not be counted, however, there shall be no unacceptable concentration of such spots. There shall be no flickering or pulsating light during functional testing for blemishes. The intensity of light in the right and left sides shall appear to be equal. Any spots that change from light to dark or dark to light, in the fluorescent screen, shall be cause for reject. When the screen is viewed through a 10 power microscope and with the radiation level on the photocathode adjusted to obtain the best spot contrast, the opaque or dark spots shall not exceed the size and quantities shown:

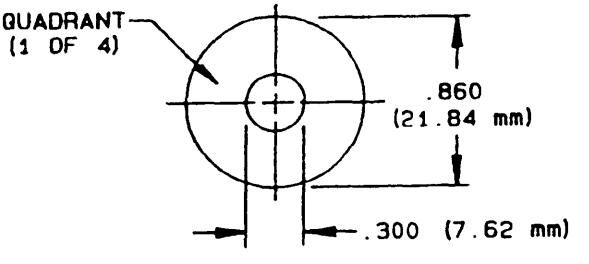


| Size of spots 1/ (inches) | Number of spots within .300 (7.62 mm) diameter circle 2/ | Number of spots, within area bounded by two circles .300 (7.62 mm) and .860 (21.84 mm) in diameter 3/ |
|---|---|---|
| .0008 to .0016 (0.020 to 0.041 mm) | 3 | 10 |
| .0016 to .006 (0.041 to 0.15 mm) | 0 | 8 |
| .006 to .009 (0.15 to 0.23 mm) | 0 | 5 |
| .009 to .012 (0.23 to 0.30 mm) | 0 | 2 |
| Greater than .012 (0.30 mm) | 0 | 0 |

See footnotes on next page.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.

1/ If the distance between two spots is less than the maximum dimension of either spot, they shall be considered as one spot with a size equal to the sum of the maximum dimensions of the two spots plus the amount of separation between them.
2/ The .300 (7.62 mm) and .860 (21.84 mm) circles on the image screen shall be concentric with the tube axis.
3/ There shall not be more than two spots, blemishes or scratches in each of the four quadrants except sizes .0008 to .0016 inch (0.020 to 0.041 mm) wherein two of the four quadrants may contain three spots."

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 17, 99
DLA - ES

User activities:
Army - AR
Navy - AS, CG, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3389)



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:04Z
Check the source to verify that this is the current version before use.