MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE, NEGATIVE GRID

TYPE 6442

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode, planar
See figure 1
Mounting position: Any
Weight: 1 ounce nominal

ABSOLUTE RATINGS:

Parameter: / Unit:	Ef V	Fl GHz	Eb Vdc	(D) epy kv	Ec Vdc	Ehk Vdc	ib a	Ib mAdc	Ic mAdc	ik a	ic a	Pp W	Pi W	tp µs	Du ---	tk sec	T(seal) °C (Note 1)	Barometric pressure, reduced mmHg (Note 2)
Osc or amp (Note 3)																		
Maximum:	5.7 (Note 4)	2.5	350	---	-50	±90	---	35	15	---	---	8.0	12	---	---	---	175	20
Minimum:	4.5	---	---	---	---	---	---	---	---	---	---	---	---	---	---	30	---	---
Pulse modulated Osc or amp (Note 5)																		
Maximum:	5.7 (Note 4)	2.5	275	---	-50	±90	---	35	15	---	---	6.0	9.5	---	---	---	175	20
Minimum:	4.5	---	---	---	---	---	---	---	---	---	---	---	---	---	---	30	---	---
Anode pulsed Osc or amp (Note 6)																		
Maximum:	6.3 (Note 4)	3.5	---	3.0	-100	±90	2.5 (Note 7)	2.5	1.25	3.75	1.25	7.5	7.5	2.0	0.001	---	175	250
Minimum:	5.7	---	---	---	---	---	---	---	---	---	---	---	---	---	---	60	---	---
Class A RF amp																		
Maximum:	6.6	---	350	---	-25	±90	---	35	---	---	---	8.0	12	---	---	---	175	20
Minimum:	5.7	---	---	---	---	---	---	---	---	---	---	---	---	---	---	0	---	---
TEST CONDITIONS	6.3	---	350	---	Adj	---	---	35	---	---	---	---	---	---	---	120 min	--- (Note 10)	---

GENERAL:

Qualification - Required

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1	12							
---	Pulsed oscillation	14, 15	F = 3.45 GHz (min); cpy = 3,000 v; Rg/Ib = 2.5 mAdc; tpv = 1.0 µs +10%; trv = 0.1 µs (max); tfv = 0.2 µs (max); prr/Du = 0.001 ±5%; Ef = 6.0 V	0.65	II	Po	1.75	---	W (useful)
1211	Insulation of electrodes	16	Ef = 6.3 V	0.65	II	Rgp Rgk	250 25	--- ---	Meg Meg
(D) 1231	Emission	-	Eb = Ec/Is = 40 mAdc	0.65	II	Eb = Ec	---	4.0	Vdc
(D) 1231	Pulsing emission	-	Prr = 500 (max); tp = 1 to 3 µs; Du = 0.0005 (min); eb = ec = etd/is = 8a	0.65	II	etd	---	175	v
1261	Electrode voltage (1) (grid)	-		0.65	II	Ec	-2.5	-5.75	Vdc
1266	Total grid current	-		0.65	II	Ic	---	-0.5	µAdc
	Quality conformance inspection, part 2								
1261	Electrode voltage (2) (grid)	-	Ec/Ib = 2 mAdc	---	---	Ec	-5.0	-11.5	Vdc
1301	Heater current	-		---	---	If	840	960	mA
1306	Transconductance	-		---	---	Sm	13,500	19,000	µmhos
---	Resonance test	8, 13	No voltages	---	---	---	---	---	---
1316	Amplification factor	-		---	---	Mu	35	65	---
1331	Direct-interelectrode capacitance	-	No voltages; use shielded socket in accordance with Drawing No. 260-JAN	---	---	Cgp Cgk Cpk	2.10 4.60 ---	2.45 5.45 0.045	pF pF pF
1336	Heater-cathode leakage	-	Eb = Ec = 0	---	---	Ihk	---	100	µAdc
	Quality conformance inspection, part 3								
---	Life test	-	Group C; t = 500 hours; pulsed oscillation	---	---	---	---	---	---
---	Life-test end point:								
---	Pulsed oscillation	-		---	---	ΔPo	---	25	%

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Periodic-check tests								
1002	Barometric pressure, reduced (1)	11, 18	Pressure = 250 mmHg (max); voltage = 3,000 Vac; TA = 30°±10°C	---	---	---	---	---	---
1002	Barometric pressure, reduced (2)	11, 18	Pressure = 20 mmHg (max); voltage = 500 Vac; TA = 30°±10°C	---	---	---	---	---	---
1031	High-frequency vibration	17	Ebb = 300 Vdc; Ec/Ib = 10 mAdc; Rp = 10,000 ohms; use socket in accordance with Drawing No. 261-JAN	---	---	Ep	---	100	mVac
(D) 1041	Shock	11	No voltages; Accel = 400 G peak (min); 0.5 ms duration (min); use socket in accordance with Drawing No. 261-JAN	---	---	---	---	---	---
---	Shock-test end point:								
1266	Total grid current			---	---	Ic	---	-0.6	µAdc
---	Torque	9, 17	No voltages	---	---	---	---	---	---
---	Torque-test end points:								
1266	Total grid current			---	---	Ic	---	-0.6	µAdc
(D) 1301	Heater current			---	---	If	840	960	mA

NOTES:

1. Sufficient conduction and convection cooling shall be provided to limit the envelope temperature to the specified maximum of 175°C under all operating conditions.
2. Operation at this altitude is possible in a suitably designed circuit.
3. Modulation essentially negative may be used if the positive peak of the audio frequency envelope does not exceed 115 percent of the carrier conditions.
4. This tube operates at frequencies where transit-time effects of the electron current shall be considered. The principal effects influencing the tube operation are the decrease in power output and operating efficiency with increase in frequency, and the bombardment and heating of the cathode by electrons from the region of the grid, which can be sufficiently severe to result in short tube life and erratic operation. Operating frequency, circuit design and adjustment, grid bias, grid current, average power input and the operating voltage contribute to some degree to the magnitude of the resulting cathode bombardment. There is a heater voltage which will maintain the cathode at the correct operating temperature for a set of operating conditions. If the conditions of operation result in appreciable cathode back-heating, it may be necessary to initiate dynamic operation of the tube at normal heater voltage, followed by a reduction of heater voltage to the proper value. A maximum variation of ±5 percent in heater voltage is recommended where consistent operation and extended tube life is a factor.
5. Carrier conditions for use with a maximum modulation factor of 1.0.
6. Tube shall not be operated for more than 6 microseconds in any 5,000-microsecond interval. Tube shall not be grid-pulsed beyond the CW ratings.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:05Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

7. The regulation or series-anode-supply impedance, or both, shall limit the instantaneous peak current, with the tube considered as a short circuit, to a maximum of 10 times the specified maximum current rating.

8. Other tube contact configurations may be used provided the tube contact area remains unchanged and the socket, jig, or cavity gives equal performance. Mounting of the socket, jig, or cavity may be at the option of the manufacturer.

(D) 9. Torque test shall be performed as follows:

(a) A torque of 15 inch-pounds shall be applied between the anode and heater terminal No. 1 without shock. This is not a destructive test.

(b) A torque of 5 inch-pounds shall be applied between heater terminal No. 1 and heater terminal No. 2 without shock. This is not a destructive test.

10. During any test the maximum temperature of any part of the envelope shall be limited to 175°C maximum by conduction or forced convection cooling.

(D) 11. Perform test on 10 tubes selected at random from the first production lot of each calendar year. If more than one tube fails, the test shall become part of quality conformance inspection, part 2, with AQL 6.5, inspection level S3. After three consecutive successful submissions, the test shall revert to an annual 10-tube test.

12. All tests listed under quality conformance inspection, part 1, are to be performed at the conclusion of the holding period.

13. Grid-anode resonance: Test in cavity in accordance with DESC Drawing No. D64102. Cavity shall resonate at 1.74 GHz ±2.5 MHz with tuning slug in accordance with DESC Drawing No. B64103 at TA = 25° ±5°C.

Grid-cathode resonance: Test in cavity in accordance with DESC Drawing No. D64102. Cavity shall resonate at 1.793 GHz ±2.5 MHz with tuning slug in accordance with DESC Drawing No. B64103 at TA = 25° ±5°C.

When plotted on graphs of resonant frequency versus grid-anode capacitance and resonant frequency versus grid-cathode capacitance, the tube under test shall be represented by a point within a parallelogram whose four corners are located by the following points:

Points	Capacitance (pF)		Frequency (GHz)	
	C-gp	C-gk	F-gp	F-gk
1	2.10	4.60	1.928	1.890
2	2.10	4.60	1.947	1.914
3	2.45	5.45	1.895	1.851
4	2.45	5.45	1.914	1.875

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

14. Test in cavity in accordance with Drawing No. 253-JAN. Measure useful power output with the coupling and tuning adjusted for maximum power output. The tube shall operate under the given conditions and after the required circuit adjustments for a minimum of 10 seconds without arcing or instability, as evidenced by pronounced variations in the average anode current meter or the power output meter. If temporary arcing does occur during the 10-second period, the tube shall subsequently operate for 60 seconds without arcing. The test may be discontinued at the end of the 10-second period if the power output has not completely stabilized but is rising. If the power output is falling, the test will be continued until a stable reading is obtained. For qualification purposes, a stabilized reading shall be obtained. All readings shall be "nonsquegging" power.

15. The pulse characteristics are defined as follows:

    (a) epy is the smooth peak voltage excluding spike (see method 1296).

    (b) The interval of trv and tfv is between 20 and 85 percent of the smooth peak value of the voltage pulse.

    (c) The definition of tp is applicable to tpv.

    (d) The parameter tpv, tfv, and trv may be measured with the tube replaced by a 1,000-ohm noninductive resistor.

    The load VSWR shall be 1.5 maximum.

16. The insulation between the grid and the cathode shall be measured with a voltage of 100 Vdc. The other insulation test shall be made in accordance with method 1211.

(D) 17. Test 10 tubes selected at random from the first production lot of each calendar year and approximately every 90 days during the year. If more than one tube fails to pass the specified end points, the failed test shall become a part of quality conformance inspection, part 2, with AQL 6.5, inspection level S3, on all lots in process. After three consecutive successful submissions, the test shall revert to a 10-tube quarterly test.

(D) 18. Voltage shall be applied between anode and grid. No other voltages shall be applied. There shall be no evidence of failure as indicated by visual arc-over.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Air Force - 11, 17
DSA - ES

User activities:
Army - WC
Navy - AS, OS, MC, CG, SH
Air Force - 19

Preparing activity: Army - EL

Agent: DSA - ES

(Project 5960-2677)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

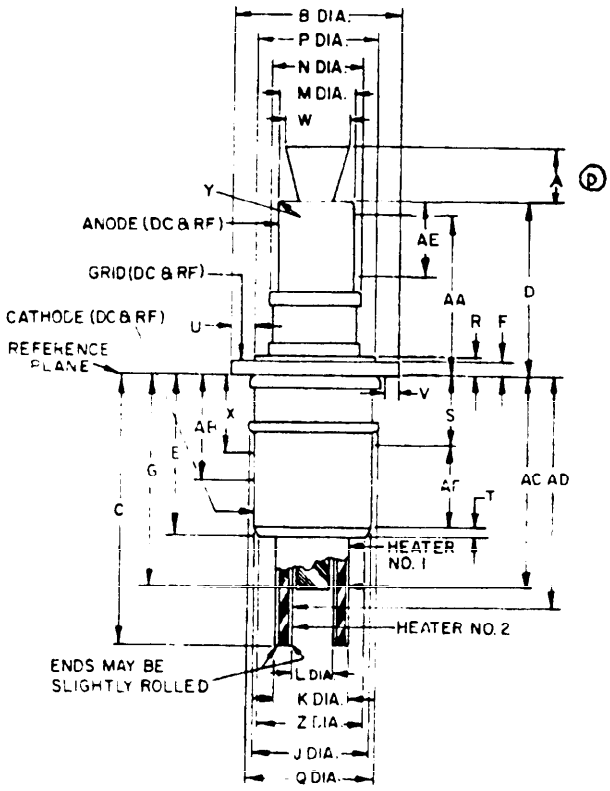


FIGURE 1. Outline drawing of electron tube type 6442.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:05Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
	Quality conformance inspection, part 2		
Ⓓ A		.250(6.35)	
B	.810(20.57)	.818(20.77)	
C	1.219(30.96)	1.281(32.53)	
D	.953(24.21)	.984(24.99)	
E	.750(19.05)	.813(20.65)	
F	.070 (1.78)	.078 (1.98)	d, e
G		1.016(25.80)	
J	.539(13.69)	.549(13.94)	f
K	.318 (8.08)	.328 (8.33)	
L	.180 (4.57)	.190 (4.82)	
M	.365 (9.27)	.371 (9.42)	
Ⓓ AE	.429(10.90)		d
	Quality conformance inspection, part 3 (periodic check)		c
N		.453(11.50)	
P	.560(14.22)	.570(14.47)	
Q		.609(15.46)	
R	.077 (1.96)	.097 (2.46)	
S		.266 (6.75)	
T	.015 (.38)	.090 (2.28)	
W		.285 (7.24)	a
X		.375 (9.52)	g
Z	.490(12.45)	.520(13.20)	
	Reference dimensions		
U	.094 (2.39)		d, e
V	.094 (2.39)		d, e
Y	.016 (.41) R		
AA	.750(19.05)		b
AB	.547(13.89)		b
AC	1.000(25.40)		b
AD	1.109(28.17)		b
AF	.453(11.51)		d

NOTES:
a. Exhaust tubulation shall not be subjected to any mechanical stress.
b. Eccentricity shall be gaged at points designated and shall be as follows (note c shall apply):

Contact	Eccentricity		Reference
	Inches	Millimeters	
Anode	.010 max	.25	Grid contact
Cathode	.010 max	.25	Grid contact
Anode-cathode	.020 TIR	.51	Grid contact
Heater No. 1	.015 max	.38	Grid contact
Heater No. 2	.015 max	.38	Grid contact
Heater No. 1 and 2	.030 TIR	.76	Grid contact

c. These dimensions shall be tested on 10 tubes per month when in continuous production. Failure of more than one tube to meet tolerances for any dimension shall cause that dimension to become, for all lots in process, part of quality conformance inspection, part 2.
d. Contact surface shall be confined to this area.
e. Only these surfaces shall be used for tube stops or clamping.
f. Maximum diameter shall not be increased by solder.
g. Tube marking shall be confined to this area.

FIGURE 1. Outline drawing of electron tube type 6442 - *Continued.*

Source: https://assist.dla.mil -- Downloaded: 202640-15T14:05Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-ED
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:05Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-E-1/1055D ELECTRON TUBE, MICROWAVE, NEGATIVE GRID TYPE 6442

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.