INCH-POUND

MIL-PRF-1/1065G
w/AMENDMENT 1
16 November 2020
SUPERSEDING
MIL-PRF-1/1065G
14 July 2009

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, CATHODE RAY
TYPE 5BCP7

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and MIL-PRF-1.

DESCRIPTION: Miniaturized, magnetic deflection and focus.

DIMENSIONS AND PIN CONNECTIONS: See figure 1.

ABSOLUTE RATINGS:

Parameter:	Ef	Ec1	Eb1	Ehk	Rg1	Alt
Unit:	V	V dc	V dc	V dc	MegΩ	ft
Maximum:	6.9	0	11,000	±180	1.5	80,000
Minimum:	5.7	-200	5,000	---	---	---
Test condition:	6.3	Adjust	6,000	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification - Required. 1/

This specification sheet uses accept on zero defect sampling plan in accordance with MIL-PRF-1, table III.

AMSC N/A

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits Min	Limits Max	Unit
Qualification inspection							
Vibration	5111	---		Width	---	2.0	mm
Pressure implosion	1141	---		---	---	---	---
Barometric pressure, reduced	1002	2/	20 mmHg	---	---	---	---
Direct-interelectrode capacitance	1331	---	k to all g1 to all	Ck Cg1	--- ---	5.5 5.5	pF pF
Cathode illumination	5216	---		---	---	---	---
Conformance inspection, part 1							
Voltage breakdown	5201	---		---	---	---	---
Voltage breakdown (magnetic types)	5201	---		---	---	---	---
Neck straightness (Alignment)	5101	---	Cylinder length = 4 inches (101.6 mm); ID = .901 inches (22.89 mm) maximum	---	---	---	---
Screen and faceplate blemishes	5106	---		---	---	---	---
Modulation	5223	---	Ib = 200 μA dc	ΔEc1	---	34	V dc
Screens	5221	---	Eb1 = 5,000 V dc; Ib1 = 48 μA dc	cB1	640	---	cB
Spot position (magnetic deflection)	5231	---		---	---	6	mm
Zero-bias anode current (magnetic deflection)	5236	3/		---	---	---	---
Focusing coil current	---	4/	Ib = 200 μA dc D = 2.375 inches (60.33 mm)	---	48	72	mA dc
Grid-cutoff voltage	5241	---		---	-19	-56	V dc
Grid No. 1 leakage current	5251	---		---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection, part 2							
Heater current	1301	---		If	270	330	mA
Side terminal and base alignment	5101	---	Halfway between pins No. 1 and No. 9	---	---	---	---
Neck and bulb alignment (magnetic types)	5101	5/		---	---	---	---
Face tilt	5101	5/		---	---	---	---
Stray light emission (conventional types)	5216	---	Eb1 = 11,000 V dc	---	---	---	---
Screen (P7 type)	5221	---	Eb1 = 5,000 V dc; Ib1 = 48 μA dc	---	---	---	---
Line width A (magnetic deflection)	5226	6/	Ib = 200 μA dc	Width	---	0.33	mm
Heater cathode leakage current	5251	---	Ehk = +180 V dc Ehk = -180 V dc	Ihk Ihk	--- ---	15 15	μA dc μA dc
Astigmatism	---	7/		Ratio	---	1.20	---
Permanence of marking	1105	---		---	---	---	---
Conformance inspection, part 3							
Life test	---	---	Group C; Eb1 = 11,000 V dc; Ib = 60 μA dc; t = 500 hours	---	---	---	---
Life-test end points:	---						
Line width A	5226	---	200 μA dc;	Width	---	0.33	mm
Modulation	5223	---	200 μA dc	ΔEc1	---	34	V dc

1/ The following information and materiel shall be made available to the Government representative conducting the qualification inspection measurements with four regular qualification samples:
(a) The gun drawing with significant dimensions.
(b) A sample of the gun to be used in manufacturing of the tubes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

2/ Maximum rated voltages are applied to all electrodes connected through the base, and with tube in cutoff conditions.

3/ The following values are to be used in place of those specified in method 5236:

Negative grid cutoff voltage	Minimum O-bias current μA	Negative grid cutoff voltage	Minimum O-bias current μA
19	250	38	480
20	250	39	500
21	250	40	520
22	250	41	540
23	250	42	560
24	250	43	580
25	250	44	600
26	270	45	620
27	285	46	640
28	300	47	660
29	310	48	680
30	335	49	700
31	350	50	725
32	370	51	750
33	390	52	775
34	405	53	800
35	425	54	825
36	445	55	850
37	460	56	875


4/ Use JEDEC No. 127 focus coil, or equal. Focusing coil current shall be determined at the focus setting used in the astigmatism test.


5/ The two sets of neck supports, referenced in method 5101, shall be spaced 1.125 inches (28.58 mm) and 3.375 inches (85.73 mm) below reference plane.

6/ Line width A shall be the maximum line width obtained in the astigmatism test.

7/ With a single line, 4.5 inches (114.30 mm) in length and 1/60-second duration, repeated at a rate of 60 Hz, modulate grid No. 1 with 1-microsecond pulses. Adjust the peak beam current to 200 μA dc and focus for the most circular spot at the center of the screen. Display a partially merged nonlinear raster and note the orientations for greatest and least mergings as the raster is rotated. Maintain this focus and proceed according to method 5226, to determine the line widths for those two orientations. Astigmatism (the ratio of the maximum to the minimum line width) shall not exceed the value specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

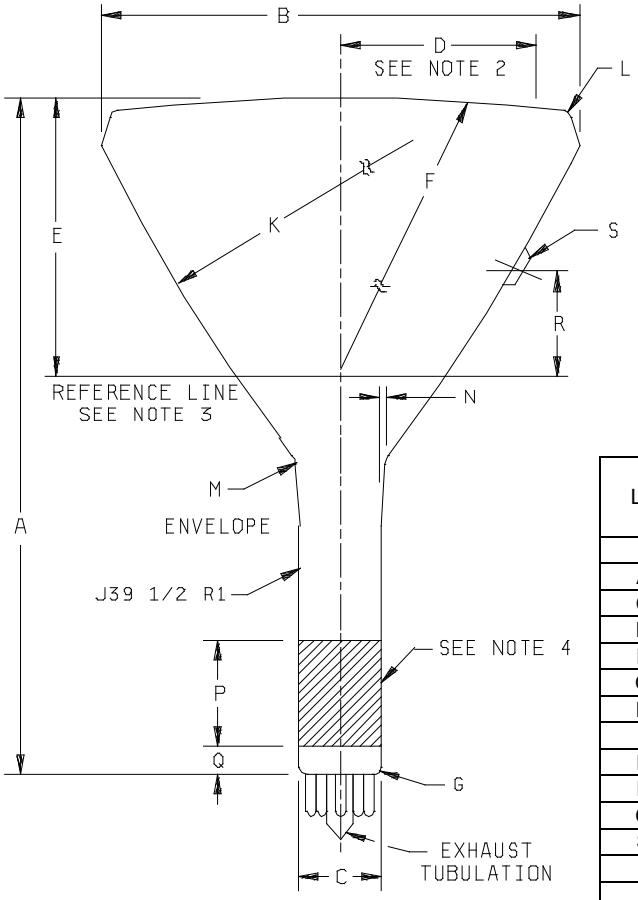



BIASING DIAGRAM

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	6.750	7.250	171.45	184.15
C	.810 DIA	.896 DIA	20.57 DIA	22.76 DIA
D	2.125 R	---	53.98 R	---
P	.938	1.062	23.83	26.97
Q	.188	.250	4.78	6.35
R	.563	.813	14.30	20.65
Qualification inspection				
B	4.900 DIA	5.000 DIA	124.46 DIA	127.00 DIA
E	2.750	2.875	69.85	73.03
G	Base: E9-37 (EIA)			
S	Bulb contact: J1-22 (EIA)			
Reference dimensions (see note 1)				
F	24.000 R		609.60 R	
K	9.660 R		245.36 R	
L	.125 R		3.18 R	
M	.125 R		3.18 R	
J	2°		2°	

NOTES:
1. These dimensions are for information only and are not required for inspection purposes.
2. Useful screen.
3. Determined by point where leading edge of JEDEC reference line gauge G123 will stop.
4. External conductive coating shall be tied to cathode potential (by external application circuitry).

FIGURE 1. Outline drawing of electron tube type 5BCP7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-PRF-1, this document references the following:
MIL-STD-1311

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project: 5960-2021-001)

Review activities:
Army - CR4
Navy - AS, CG, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:05Z
Check the source to verify that this is the current version before use.