INCH-POUND

MIL-PRF-1/1071C(CR)
25 June 1999
SUPERSEDING
MIL-E-1/1071B(EL)
11 November 1971

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, GAS SWITCHING
TYPE 6962

This specification is approved for use by the Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: ATR, L-band, Fo = 1,285 MHz.

ABSOLUTE RATINGS:

Parameter: Unit:	Incident power Mw	Du ---	Alt ft
Maximum: Minimum:	2 ---	0.001 ---	10,000 ---

PHYSICAL CHARACTERISTICS:

Dimensions: See figures 1 and 2.
Mounting: See figure 1 and 1/.
Weight: 6 pounds (approximate).

TEST CONDITIONS:

Parameter: Unit:	Incident power kw	tp µs	Du ---	VSWR σ'	F MHz
Test condition 1:					
Maximum	525	4.4	0.001	1.05	1,298
Minimum	475	3.6	---	---	1,272
Test condition 2:					
Maximum	2,100	4.4	0.001	---	1,298
Minimum	1,900	3.6	---	---	1,272

See footnotes at end of table I.

GENERAL:

Preproduction sample approval: Required. 2/

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Notes	Test	Conditions	Symbol	Limits		Unit
						Min	Max	
First article inspection (Preproduction)		2/	---					
Loaded Q	4461	3/	---		QL	---	2.5	---
High-level VSWR	4474	3/	1		VSWR	---	1.15	---
Degradation due to vibration	4021	---	---		---	---	---	---
Conformance inspection, part 1		4/	---					
Tuning susceptance	4482	3/	---	Method A	b	-0.03	+0.03	---
Firing time	4486	3/	1		t	---	5	sec
Arc loss	4488	3/	1		La	---	0.3	dB
Temperature cycling	1027	---	---	1 cycle	---	---	---	---
Temperature cycling life test	1027	---	---	Group D; 10 cycles (min)	---	---	---	---
Conformance inspection, part 2								
Dielectric material strain	4101	---	---		---	---	---	---
Normalized conductance	4484	3/	---		g	---	0.03	---
Variable-frequency vibration	1031	---	---	F = 50 to 500 Hz; 15 G; t = 30 minutes (min)	---	---	---	---
Insertion	---	5/	---		---	---	---	---
Conformance inspection, part 3								
Life test	---	6/	2	Group D	t	1,000	---	hours
Life-test end points:	---	---	---					
Tuning susceptance	4482	3/	---	Method A	b	-0.05	+0.05	---
Normalized conductance	4484	3/	---		g	---	0.05	---
Arc loss	4488	3/	1		La	---	0.4	dB

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ Suitable rf gaskets will be supplied with each tube.

2/ The number of first article (preproduction) samples required for inspection and the acceptance criteria shall be as specified for qualification testing in the basic document. All tests listed on the tube specification sheet are required for first article (preproduction) inspection; however, those tests grouped under this heading are to be performed during preproduction testing only.


3/ This test shall be performed in a half-height L-band waveguide (ID 6.500 (165.10 mm) inches x 1.625 (41.28 mm) inches).

4/ Unless otherwise specified, the acceptance level for all tests listed under conformance inspection, part 1, shall be 1.0 percent, inspection level II.

5/ The tube shall be capable of being inserted and removed from its seat a minimum of 15 times with no deterioration in the tube electrical characteristics.

6/ This test shall be performed in a full-height L-band waveguide (ID 6.500 (165.10 mm) inches x 3.250 (82.55 mm) inches).


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.

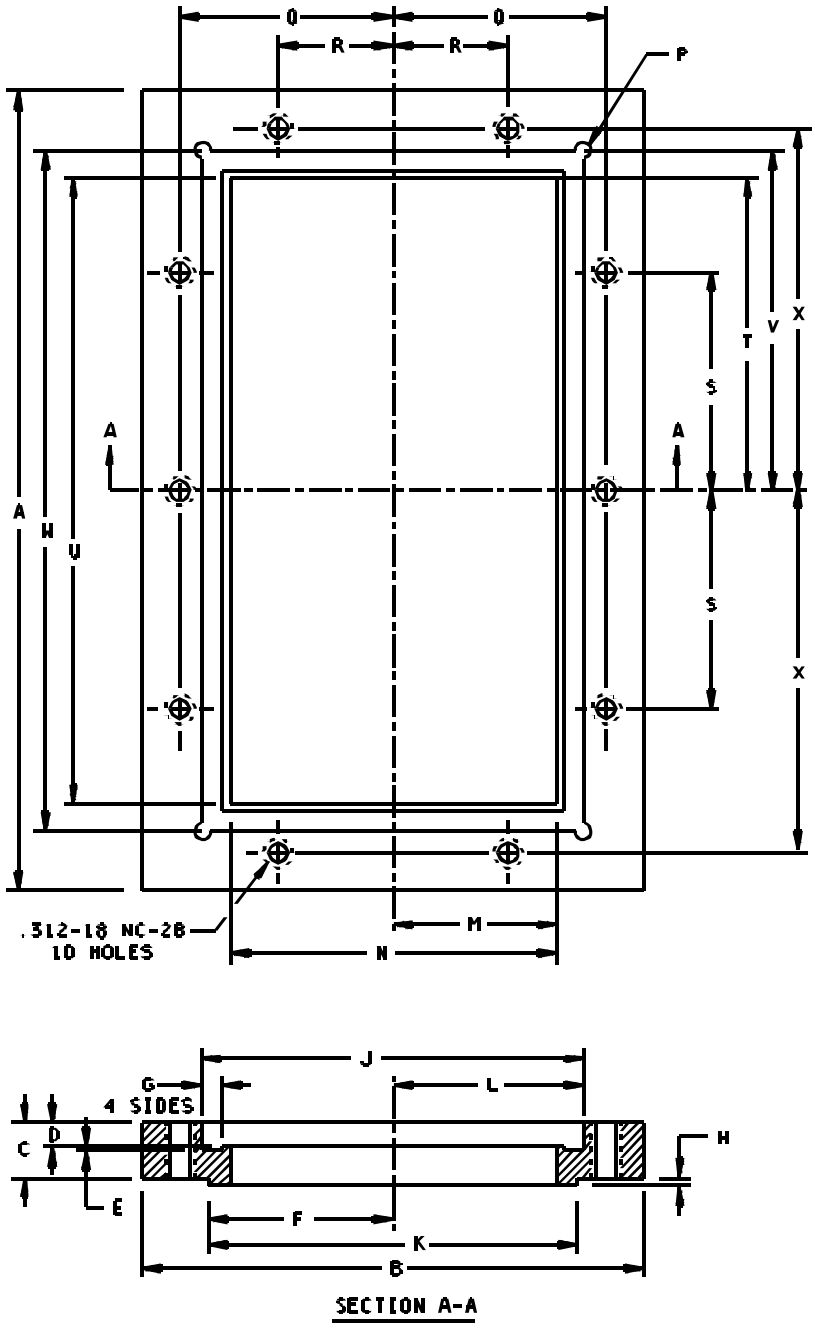

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 1				
Q	2.309	2.317	58.65	58.85
R	1.246	1.254	31.65	31.85
S	2.371	2.379	60.22	60.43
X	3.934	3.942	99.92	100.13
Reference dimensions				
A	8.690		220.73	
B	5.437		138.10	
C	.600		15.24	
D	.250		6.35	
E	.020		0.51	
F	2.000		50.80	
G	.220		5.59	
H	.080		2.03	
J	4.135		105.03	
K	4.000		101.60	
L	2.067		52.50	
M	1.768		44.91	
N	3.537		89.84	
P	.22 x .270 DP		5.59 x 6.86 DP	
T	3.393		86.18	
U	6.787		172.39	
V	3.692		93.78	
W	7.385		187.58	

FIGURE 1. Mounting seat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.

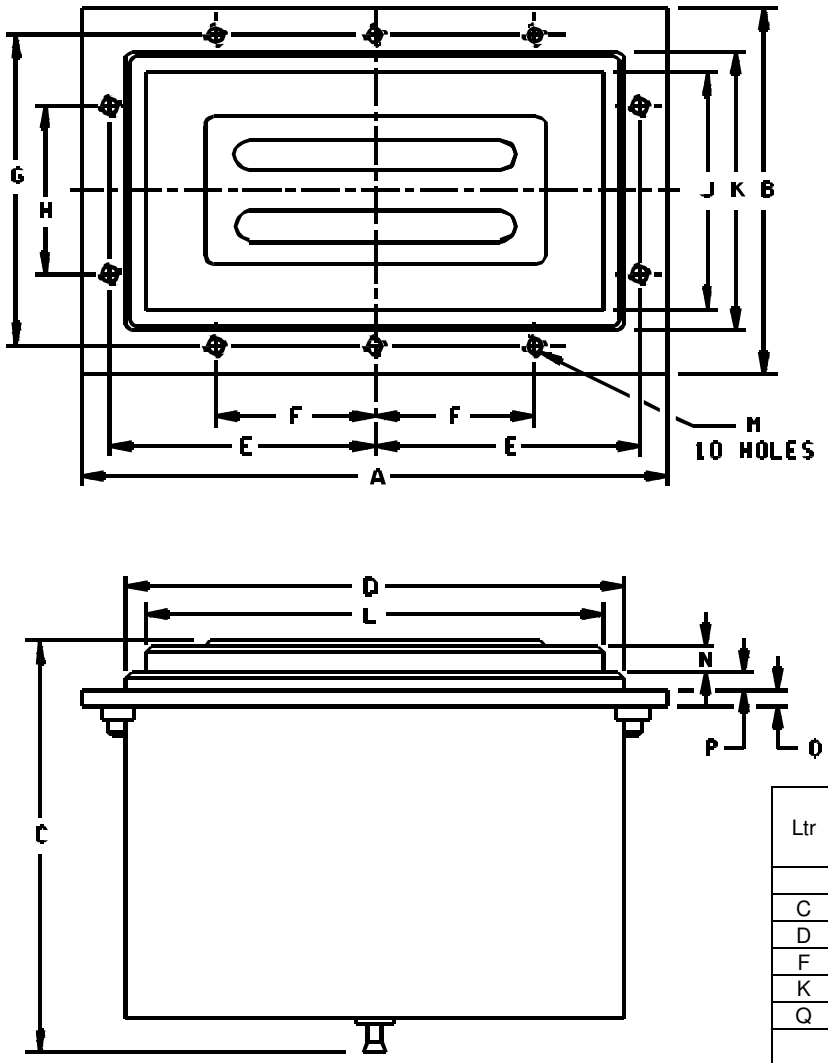

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Preproduction inspection				
C	---	6.125	---	155.58
D	7.355	7.375	186.82	187.33
F	2.367	2.383	60.12	60.53
K	4.105	4.125	104.27	104.78
Q	.240	.260	6.10	6.60
Conformance inspection, part 1 4/				
E	3.930	3.946	99.82	100.23
J	---	3.475	---	88.27
L	----	6.725	---	170.82
Conformance inspection, part 2				
G	4.618	4.634	117.30	117.70
H	2.492	2.508	63.30	63.70
M	.348 Drill		8.84 Drill	
N	.370	.390	9.40	9.91
P	.240	.260	6.10	6.60
Reference dimensions				
A	8.69		220.73	
B	5.44		138.18	

FIGURE 2. Outline drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
DLA - CC

Review activity:
Army - MI

Preparing activity:
DLA - CC

(Project 5960-A251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:06Z
Check the source to verify that this is the current version before use.