INCH-POUND

MS17344G
w/AMENDMENT 1
12 September 2018
SUPERSEDING
MS17344G
16 January 2013

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

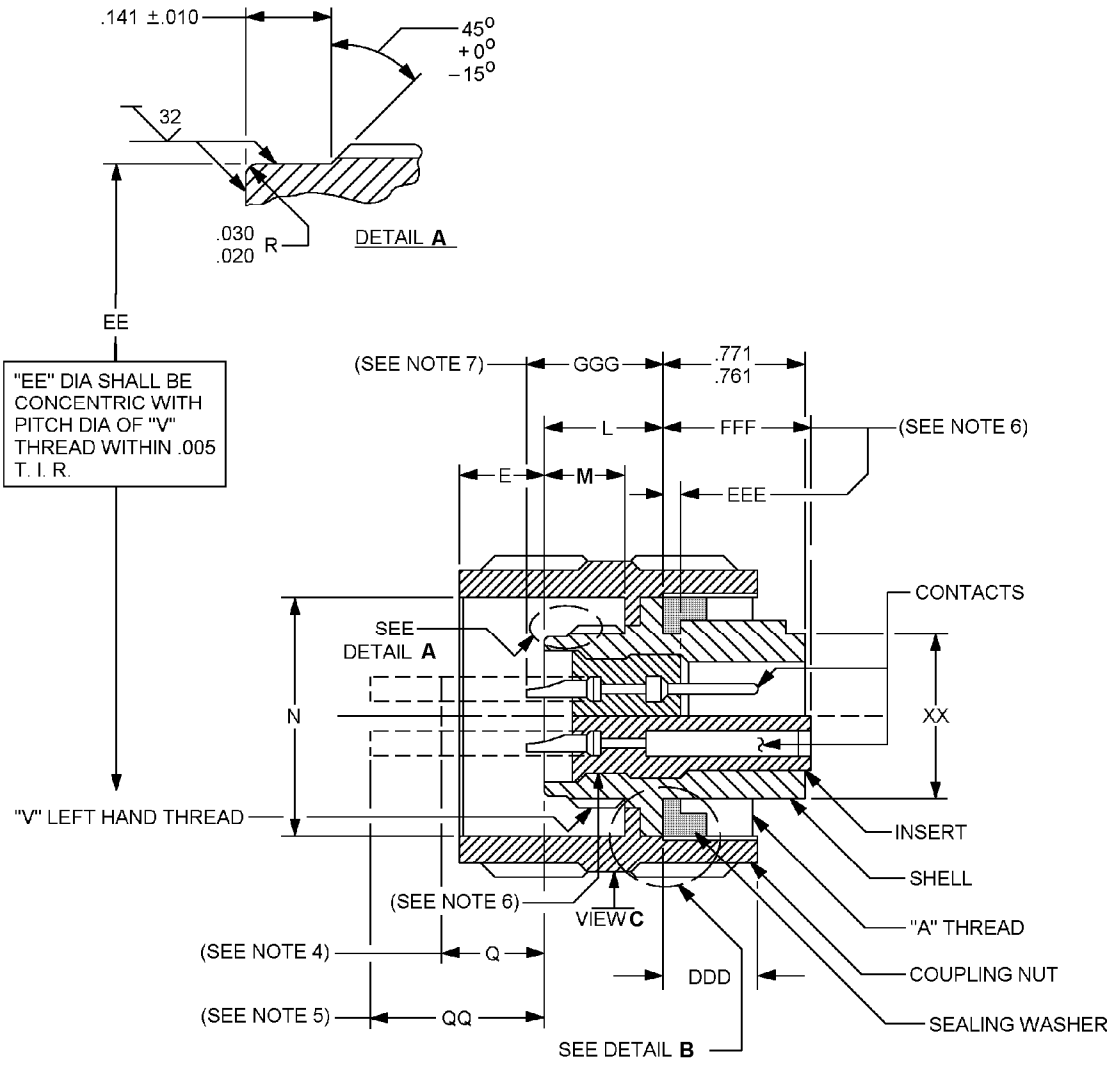


FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

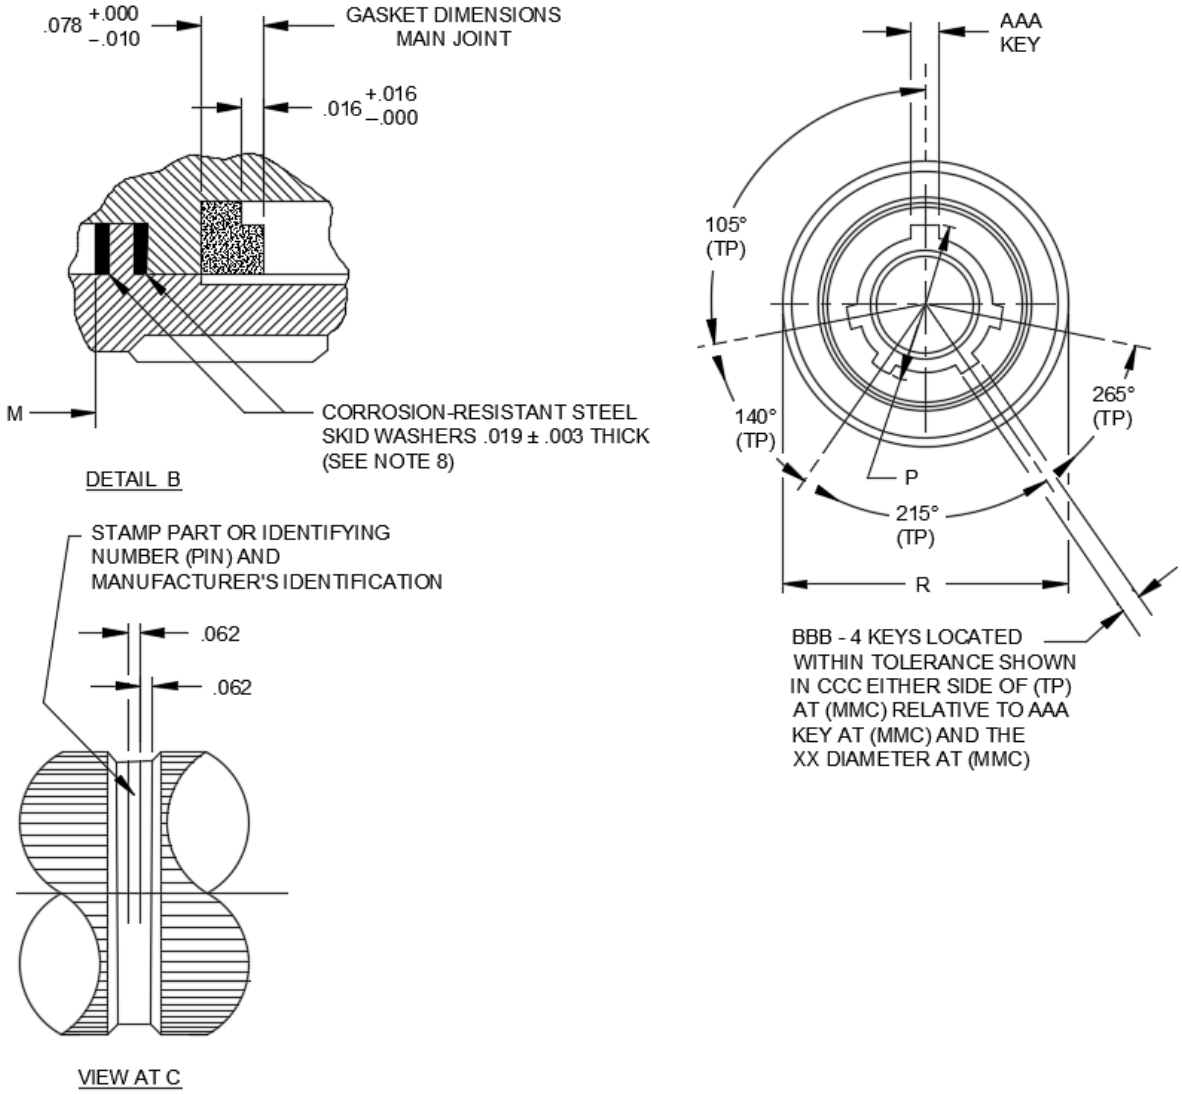


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	A Thread (plated) class 2B	E max	L + .011 - .010	M ± .031
12	0.8750-0.1P-0.2L-DS	.100	.738	.529
14	1.0000-0.1P-0.2L-DS			
16	1.1250-0.1P-0.2L-DS	.150		
18	1.2500-0.1P-0.2L-DS	.275		
20	1.3750-0.1P-0.2L-DS			
22	1.5000-0.1P-0.2L-DS			
24	1.7500-0.1P-0.2L-DS		.800	
28	2.0000-0.1P-0.2L-DS			
32	2.2500-0.1P-0.2L-DS		.875	
36	2.5000-0.1P-0.2L-DS	.300		
40	2.7500-0.1P-0.2L-DS	.100	1.041	.717
44	3.0000-0.1P-0.2L-DS	.109		

Shell size	N + .010 - .001	P + .010 - .005	Q max	QQ max	R dia max
12	.985	.627	.477	---	1.156
14	1.109	.752		1.027	1.281
16	1.235	.877			1.469
18	1.359	1.002			1.563
20	1.485	1.128			1.688
22	1.609	1.252			1.844
24	1.859	1.453		.967	2.094
28	2.109	1.672			2.344
32	2.359	1.922	.342	.892	2.594
36	2.609	2.141			2.844
40	2.922	2.391			3.156
44	3.172	2.672	NA	NA	3.406

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	V Thread (plated) class 2A LH	EE dia + .001 - .007	XX dia + .010 - .006	AAA	BBB
12	.7500-20 UNEF	.672	.554	.115 +.001, -.007	.047 +.001, -.007
14	.8750-20 UNEF	.797	.674		
16	1.0000-20 UNEF	.922	.804	.172 +.001, -.010	.078 +.001, -.010
18	1.1250-18 UNEF	1.040	.929		
20	1.2500-18 UNEF	1.164	1.052		
22	1.3750-18 UNEF	1.289	1.177		
24	1.6250-18 UNEF	1.539	1.302	.250 +.001, -.010	.125 +.001, -.010
28	1.8750-16 UN	1.780	1.522		
32	2.0625-16 UN	1.967	1.772		
36	2.3125-16 UN	2.217	1.982		
40	2.6250-16 UN	2.530	2.232		
44	2.8750-16 UN	2.780	2.522		

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	CCC	DDD	EEE pin insert location ± .030	FFF socket insert location ± .030	GGG max
12	.0035	.655 .593	.084	.793	.898
14					
16	.007				
18					
20					
22					
24					
28					
32		.677 .610			
36		.701 .634			
40		.679 .618			
44			.049	.774	1.062

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.300	7.62	.875	22.22	1.302	33.07	2.109	53.57
.003	0.08	.342	8.69	.877	22.28	1.359	34.52	2.141	54.38
.0035	0.09	.417	10.59	.892	22.66	1.375	34.93	2.217	56.31
.005	0.13	.477	12.12	.898	22.81	1.453	33.91	2.232	56.70
.006	0.15	.529	13.44	.922	23.42	1.469	37.31	2.250	57.15
.007	0.18	.554	14.07	.929	23.60	1.485	37.72	2.3125	58.74
.010	0.25	.593	15.06	.967	24.56	1.500	38.10	2.344	59.54
.011	0.28	.610	15.49	.985	25.02	1.522	38.66	2.359	59.92
.016	0.41	.618	15.70	1.000	25.40	1.539	39.09	2.391	60.73
.019	0.48	.627	15.93	1.002	25.45	1.563	39.70	2.500	63.50
.020	0.51	.655	16.64	1.027	26.09	1.609	40.87	2.522	34.06
.030	0.76	.672	17.07	1.040	26.42	1.625	41.28	2.530	64.26
.031	0.79	.674	17.12	1.041	26.44	1.672	42.47	2.594	65.89
.047	1.19	.677	17.20	1.052	26.72	1.688	42.88	2.625	66.70
.049	1.24	.679	17.25	1.062	26.97	1.750	44.46	2.629	66.78
.062	1.57	.701	17.81	1.109	28.17	1.772	45.01	2.672	67.87
.078	1.98	.717	18.21	1.125	28.60	1.780	45.21	2.750	69.85
.084	2.13	.738	18.75	1.128	28.65	1.844	46.84	2.844	72.24
.100	2.54	.750	19.05	1.156	29.36	1.859	48.22	2.875	73.04
.109	2.77	.752	19.10	1.164	29.57	1.8750	47.625	2.922	74.22
.115	2.92	.761	19.33	1.177	29.90	1.9225	48.832	3.000	76.20
.125	3.18	.771	19.58	1.235	31.37	1.967	49.96	3.156	80.16
.141	3.58	.774	19.66	1.250	31.75	1.982	50.34	3.172	80.57
.150	3.81	.793	20.14	1.252	31.80	2.000	50.80	3.406	86.51
.172	4.37	.797	20.24	1.281	31.54	2.0625	52.40		
.250	6.35	.800	20.32	1.289	32.74	2.096	53.24		
.275	6.99	.804	20.42						

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified tolerances are ± .016 inch (0.41 mm).
3. Metric equivalents are given for information only.
4. Maximum termination of grommet extension for sizes 12 and 16 contacts for class J.
5. Maximum termination of grommet extension for sizes 0, 4, and 8 contacts for class J.
6. Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
7. Dimensions shall be 1.210 (30.73 mm) maximum to .920 (23.37 mm) minimum for size 0 contacts only.
8. Front and rear washers for sizes 32 and 36 only. Rear washers for sizes 40 and 44 only.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.


Mates with receptacles in accordance with MS17343 and MS17345, MS17346, MS17347, and MS17348, dummy stowage receptacle in accordance with MS18062, and protective cover in accordance with MS17350.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

For shell size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish: See MIL-DTL-22992.

Part or Identifying Number (PIN) example:

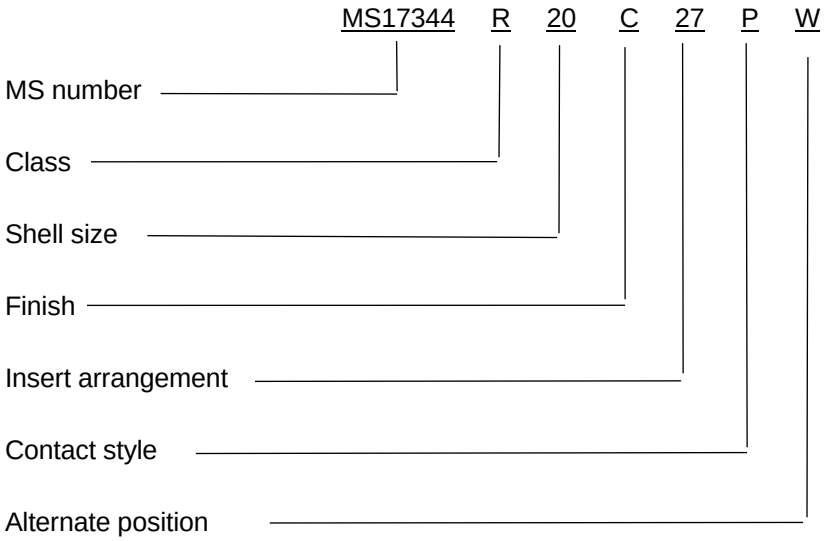

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS17343
MS17345
MS17346
MS17347
MS17348
MS17350
MS18062
MIL-STD-1651

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, SH, YD
Air Force – 19

(Project 5935–2018-126)

Civil agency:
NASA – NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.