INCH-POUND
MS17348E
18 April 1994
SUPERSEDING
MS17348D
12 August 1987

MILITARY SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, ELECTRICAL, JAMNUT (BOX)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22992.

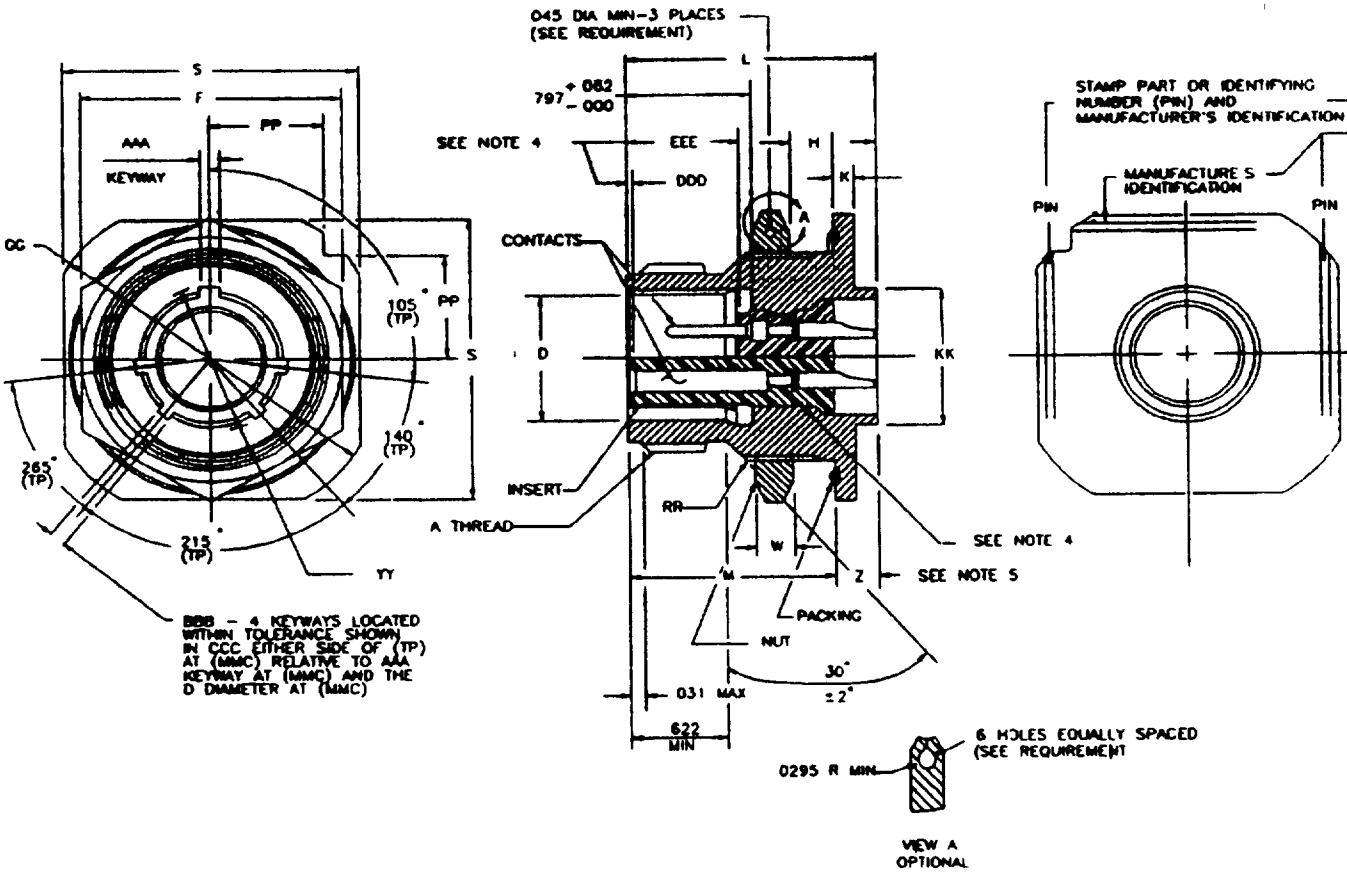



FIGURE 1. Dimensions and configuration


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Size | A thread (plated) class 2A | D dia +.005 -.010 | F hex +.017 -.016 | H panel thickness | | K +.006 -.005 | L +.011 -.010 | M | S | W +.017 -.000 | Z max (see note 5) | Z min (size 0 only) | DDD socket insert ltcn ±.030 | EEE pin insert ltcn ±.030 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Min | Max | | | | | | | | | |
| 12 | 0.8750-0.1P-0.2L-DS | .567 | 1.250 | .094 | .297 | 125 | 1.578 | 1.235 | 1 375 | .188 | .429 | NA | .020 | .729 |
| 14 | 1 0000-0 1P-0.2L-DS | .692 | 1.312 | .094 | .297 | 125 | 1.578 | 1.235 | 1.500 | .188 | .429 | NA | .020 | .729 |
| 16 | 1 1250-0.1P-0.2L-DS | .817 | 1.500 | .094 | .297 | .188 | 1.578 | 1.235 | 1.750 | .188 | .461 | NA | .020 | .729 |
| 18 | 1.2500-0.1P-0.2L-DS | .942 | 1.562 | .094 | .266 | .188 | 1.578 | 1.203 | 1.875 | .188 | .461 | NA | .020 | .729 |
| 20 | 1.3750-0.1P-0.2L-DS | 1.068 | 1.750 | .094 | .266 | .188 | 1.578 | 1.203 | 2.000 | .188 | .461 | .535 | .020 | .729 |
| 22 | 1.5000-0.1P-0.2L-DS | 1.192 | 1.875 | .094 | .266 | .188 | 1.578 | 1.203 | 2.125 | .188 | .461 | .535 | .020 | .729 |
| 24 | 1.7500-0.1P-0 2L-DS | 1.317 | 2.125 | .094 | .328 | .188 | 1.641 | 1.266 | 2.375 | .188 | .398 | .472 | .020 | .729 |
| 28 | 2.0000-0.1P-0.2L-DS | 1.536 | 2.375 | .094 | .328 | .219 | 1.641 | 1.329 | 2.625 | .250 | .335 | .409 | 020 | .729 |
| 32 | 2.2500-0.1P-0.2L-DS | 1.786 | 2.625 | .094 | .328 | .219 | 1.641 | 1.329 | 2.875 | .250 | .335 | .409 | .020 | .729 |
| 36 | 2.5000-0.1P-0.2L-DS | 2.005 | 2.875 | .094 | .328 | .219 | 1.641 | 1.329 | 3.125 | .250 | .335 | .409 | .020 | .729 |
| 40 | 2.7500-0.1P-0.2L-DS | 2.255 | 3.125 | .094 | .328 | .219 | 1.641 | 1.329 | 3.406 | .250 | .335 | .409 | .020 | .729 |
| 44 | 3.0000-0.1P-0.2L-DS | 2.545 | 3.375 | .094 | .328 | .219 | 1.641 | 1.329 | 3.656 | .250 | .562 | .409 | .039 | .764 |

FIGURE 1. Dimensions and configuration - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Size | GG dia | KK dia +.011 -.010 | PP +.011 -.010 | RR thread (plated) class 2A | YY dia +.010 -.006 | AAA | BBB | CCC | Packing preformed |
|---|---|---|---|---|---|---|---|---|---|
| 12 | 1.562 | .640 | .486 | 1.0000-20 UNEF | .647 | +.007 .126 -.001 | +.007 .063 -.001 | .0035 | MS29513-24 |
| 14 | 1.750 | .765 | .530 | 1.1250-18 NEF | .772 | +.007 126 -.001 | +.007 .063 -.001 | .0035 | MS29513-26 |
| 16 | 2.000 | .890 | .623 | 1.2500-18 NEF | .897 | +.010 .182 -.001 | +.010 .108 -.001 | .007 | MS29513-127 |
| 18 | 2.125 | 1.015 | .663 | 1.3750-18 NEF | 1.022 | +.010 .182 -.001 | +.010 .108 -.001 | .007 | MS29513-129 |
| 20 | 2.250 | 1 171 | .707 | 1.5000-18 NEF | 1.148 | +.010 182 -.001 | +.010 .108 -.001 | .007 | MS29513-131 |
| 22 | 2.500 | 1.296 | .751 | 1.6250-18 NEF | 1.272 | +.010 .182 -.001 | +.010 .108 -.001 | .007 | MS29513-133 |
| 24 | 2.750 | 1.421 | .840 | 1.8750-16 UN | 1.473 | +.010 .260 -.001 | +.010 .155 -.001 | .007 | MS29513-137 |
| 28 | 3.000 | 1.625 | .928 | 2.1250-16 UN | 1.692 | +.010 .260 -.001 | +.010 .155 -.001 | .007 | MS29513-141 |
| 32 | 3.250 | 1.891 | 1.017 | 2.3750-16 UN | 1.942 | +.010 .260 -.001 | +.010 .155 -.001 | .007 | MS29513-145 |
| 36 | 3.500 | 2.078 | 1.104 | 2.6250-16 UN | 2.161 | +.010 .260 -.001 | +.010 .155 -.001 | .007 | MS29513-149 |
| 40 | 3.750 | 2.312 | 1.213 | 2.8750-16 UN | 2 411 | +.010 .260 -.001 | +.010 155 -.001 | .007 | MS29513-234 |
| 44 | 4.000 | 2.562 | 1.299 | 3.1250-16 UN | 2.692 | + 010 .260 -.001 | +.010 .155 -.001 | .007 | MS29513-236 |

FIGURE 1. Dimensions and configuration - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .328 | 8.33 | .897 | 22.78 | 1.473 | 37.42 | 2.312 | 58.78 |
| .0035 | 0.089 | .335 | 8.51 | 928 | 23.57 | 1.5000 | 38.100 | 2.317 | 58.975 |
| .005 | 0.13 | .398 | 10.11 | .942 | 23.93 | 1.500 | 38.105 | 2.3750 | 60.325 |
| 006 | 0.15 | .409 | 10.34 | 1.0000 | 25.400 | 1 536 | 39.01 | 2.375 | 60.33 |
| .007 | 0.18 | .429 | 10.89 | 1.015 | 25.78 | 1.562 | 39.67 | 2.411 | 60.24 |
| .010 | 0.25 | .461 | 11 71 | 1 017 | 25.83 | 1.578 | 40.08 | 2.5000 | 63.500 |
| .011 | 0.28 | .472 | 11.99 | 1.022 | 25.96 | 1.6250 | 41.275 | 2.500 | 63.50 |
| .016 | 0.41 | .486 | 12.34 | 1.068 | 27.13 | 1.625 | 41.28 | 2.562 | 65.07 |
| .017 | 0.43 | .530 | 13.46 | 1.104 | 28.04 | 1.641 | 41.68 | 2.6250 | 66.675 |
| .020 | 0.51 | .535 | 13.59 | 1.1250 | 28.575 | 1.692 | 42.98 | 2 625 | 66 68 |
| .030 | 0 76 | .562 | 14.27 | 1.148 | 29.16 | 1.7500 | 44 450 | 2.692 | 68.38 |
| 031 | 0.79 | .567 | 14 40 | 1.171 | 29.74 | 1.750 | 44.45 | 2.7500 | 69.850 |
| .039 | 0.99 | .623 | 15.82 | 1.192 | 30.28 | 1.786 | 45.36 | 2.750 | 69.85 |
| .045 | 1.14 | .640 | 16.26 | 1.203 | 30 56 | 1.8750 | 47.625 | 2.8750 | 73.025 |
| .062 | 1.57 | .647 | 16.43 | 1.213 | 30.81 | 1.875 | 47.63 | 2.875 | 73.03 |
| .063 | 1.60 | .663 | 16.84 | 1.235 | 31.37 | 1.891 | 48.03 | 3.0000 | 76.200 |
| .094 | 2.39 | .692 | 17.58 | 1.2500 | 31.750 | 1.942 | 49.33 | 3.000 | 76.20 |
| .108 | 2.74 | .707 | 17.96 | 1.250 | 31.75 | 2.0000 | 50.800 | 3.1250 | 79.375 |
| .125 | 3.18 | .729 | 18.52 | 1.266 | 32.16 | 2.000 | 50.80 | 3.125 | 79.38 |
| .126 | 3.20 | .751 | 19.08 | 1.272 | 32.31 | 2.005 | 50.93 | 3.258 | 82.75 |
| .155 | 3.94 | .764 | 19.41 | 1.296 | 32.92 | 2.078 | 52.78 | 3.375 | 85.73 |
| .182 | 4.62 | .765 | 19.43 | 1.299 | 32.99 | 2.1250 | 53.975 | 3.406 | 86.51 |
| .188 | 4.78 | .722 | 19.61 | 1.312 | 33.32 | 2.125 | 53.98 | 3.500 | 88.90 |
| .219 | 5.56 | .797 | 20.24 | 1.317 | 33.45 | 2.161 | 54.89 | 3.656 | 92.86 |
| .250 | 5.78 | .817 | 20.75 | 1.329 | 33.75 | 2.2500 | 57.150 | 3.750 | 95.25 |
| .260 | 6.60 | .840 | 21.34 | 1.3750 | 34.925 | 2.25 | 57.15 | 4.000 | 101.60 |
| .266 | 6.76 | .8750 | 22.225 | 1.375 | 34.93 | 2.255 | 57.28 | | |

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm).
3. Metric equivalents are given for information only.
4. Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
5. For size 0 contacts only, increase Z dimension by .312 (7.92 mm) for shell sizes 12 through 40 and by .062 (1.57 mm) for shell size 44

REQUIREMENTS:

Mates with plugs shown on MS17344 and covers shown on MS17349.

Part or Identifying Number (PIN) example:

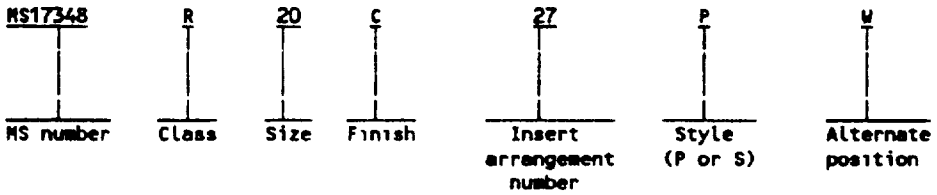


Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

For shell size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish shall be designated by the letter C (conductive) or N (nonconductive).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Safety wire holes shall not pull out when safety wire NI-CU alloy (Monel) (UNS N04400) or NI-CR alloy (INCONEL) (UNS N06600) .020 diameter in accordance with MS20995 is threaded through a hole and a pull of 30 pounds minimum is applied. Two pulls shall be made, one parallel with axis of nut and one perpendicular to axis of nut.

Qualification.

QPL evaluating activity: Defense Electronics Supply center (DESC-E), Dayton, OH 45444-5270

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - AS, YD
Air Force - 99

User activities:
Navy - CG, MC, OS, SH
Air Force - 19

Preparing activity:
DLA ES

(Project number 5935-3933)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.