

FED. SUP CLASS
6240

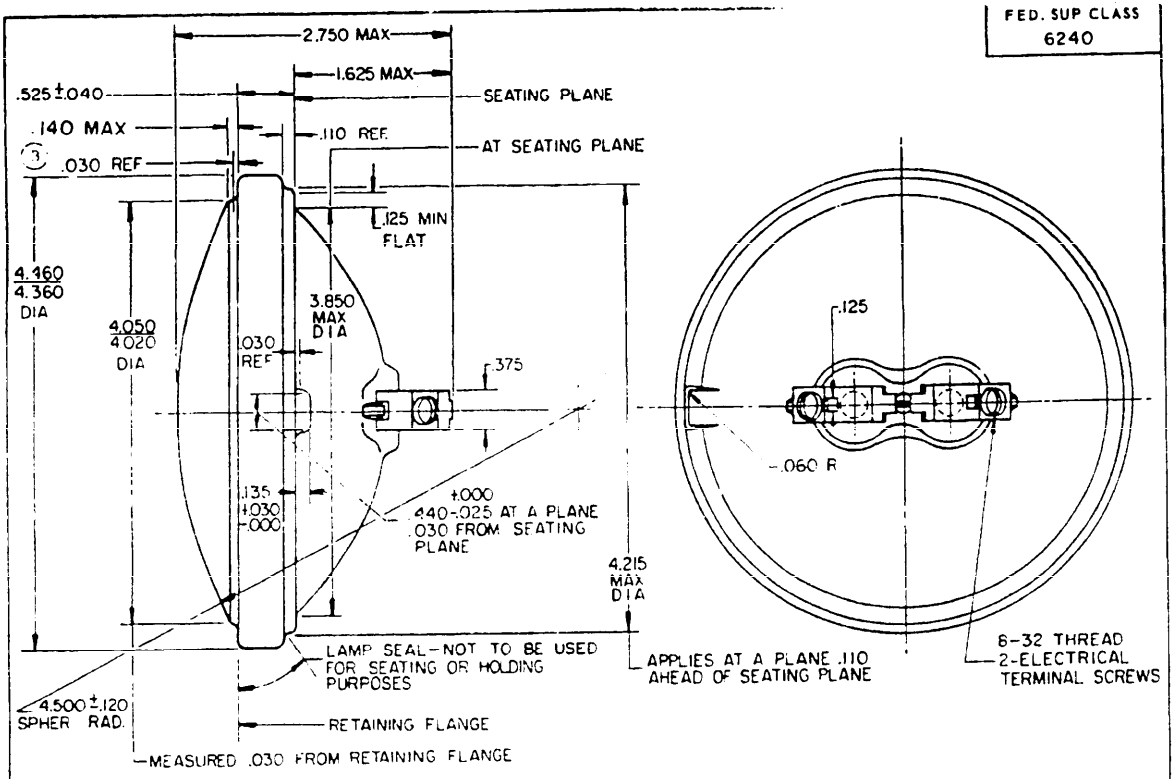

PHOTOMETRIC TEST POINTS
SEE TABLE I FOR TEST POINT VALUES

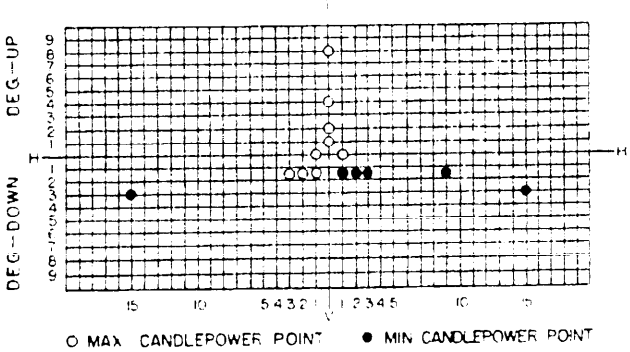

○ MAX CANDLEPOWER POINT ● MIN CANDLEPOWER POINT

TABLE I
PHOTOMETRIC TEST POINT VALUES
MEASURED 60 FEET FROM LAMP

POSITION, DEG.	MAX C.P.	MIN C.P.
LINES 8U TO 90U	75	——
LINE —4U	125	——
LINE —2U	200	——
LINE —1U	300	——
H—1L TO LEFT	500	——
H—1R TO RIGHT	1000	——
H-1/2D—1L TO 3L	8000	——
H-1/2D—1R TO 3R	——	2000
H-1/2D—3R TO 9R	——	1000
3D—15L TO 15R	——	1000

MS PART NO.	FORMER PART NO	RATED VOLTS	RATED WATTS	DESIGN VOLTS	DESIGN AMPS	FILAMENT TYPE	RATED AVG. LIFE	DESCRIPTION
MS 18002 -4015	ORD 193159	6	35	5.2	5.64	C—6	300 HRS	CLEAR GLASS LENS, PRISMATIC-FILAMENT SHIELD
MS 18002 -4503	ORD 193137	12	40	14	2.86	C—6	400 HRS	CLEAR GLASS LENS, PRISMATIC

(P) [illegible]

APPROVED 23 NOVEMBER 1962 REVISED (A) 7 SEPTEMBER 1978 (B) 26 JANUARY 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. [illegible]
Other Cust
Navy—3H

TITLE
LAMP, INCANDESCENT — SEALED BEAM, PAR 36 FOG LAMP, 2 SCREW TERMINAL TYPE

PROCUREMENT SPECIFICATION
W-L-50

SUPERSEDES
DLAX3 (IN PART)

MILITARY STANDARD
MS 18002
SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6240-0325

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. TYPE III (AUTOMOTIVE) OF PROCUREMENT SPECIFICATION.
2. LAMP 4015 SHALL BE IN ACCORDANCE WITH SOCIETY OF AUTOMOTIVE ENGINEERS (SAE) STANDARD ON FOG LAMPS, SAE J583.
3. MS DASH NUMBERS CORRELATE WITH LAMP INDUSTRY TRADE NUMBERS.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCE, ± .010 ON DECIMALS.
5. MARKINGS SHALL CONSIST OF MS DASH NUMBER, VOLTAGE RATING, AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. (B) THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.

APPROVED [illegible] REVISED (B) FOR CHANGES SEE SHEET 1

P.A. Other Cust	TITLE LAMP, INCANDESCENT — SEALED BEAM, PAR 36 FOG LAMP, 2 SCREW TERMINAL TYPE	MILITARY STANDARD MS18002
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.