
FED. SUP CLASS
5940

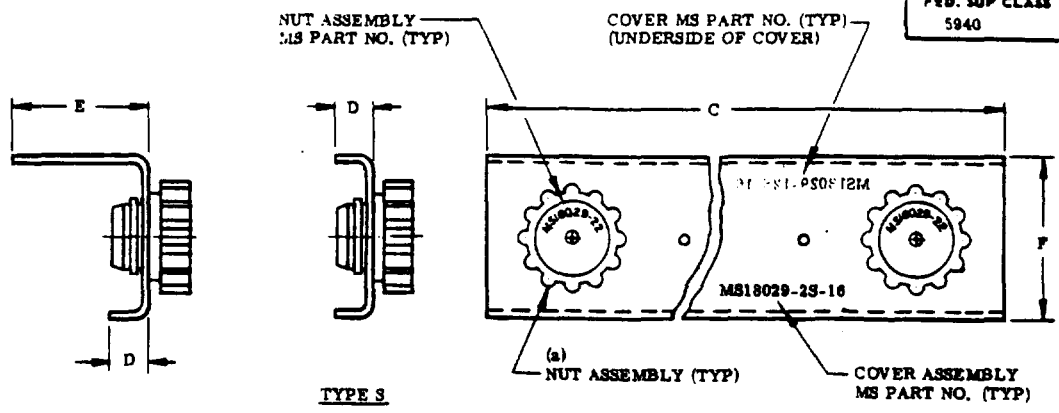


## COVER ASSEMBLY

| ASSEMBLY NO. | COVER DASH NO. | | STUDS | | NUT ASSEMBLY DASH NO. | C (REF) | D (REF) | E (REF) | F (REF) |
|---|---|---|---|---|---|---|---|---|---|
| | TYPE L | TYPE S | (N) MAX. | SIZE | | | | | |
| MS18029-1(*)-(N) | -11L-(N) | -11S-(N) | 20 | .138-32 | -21 | 12.334 | .234 | .734 | .813 |
| MS18029-2(*)-(N) | -12L-(N) | -12S-(N) | 16 | .190-32 | -22 | 12.454 | | .906 | 1.063 |
| MS18029-3(*)-(N) | -13L-(N) | -13S-(N) | 8 | .250-28 | -23 | 12.641 | .375 | 1.312 | 1.500 |
| MS18029-4(*)-(N) | | | | .312-24 | -24 | | | | |
| MS18029-5(*)-(N) | | | | .375-24 | -25 | | | | |
| MS18029-6(*)-(N) | -14L-(N) | -14S-(N) | 16 | .164-32 | -26 | 12.454 | .234 | .734 | .813 |

(a) COVER ASSEMBLIES MS18029-1L-2 OR MS18029-1S-2 USE NUT ASSEMBLY MS18029-21 (QTY 1). ALL OTHERS REQUIRE TWO NUT ASSEMBLIES.

NOTES:

1. (*) USE LETTER L OR S TO INDICATE TYPE COVER DESIRED.
   (N) INDICATES THE NUMBER OF STUDS IN A MS27212 TERMINAL BOARD ASSEMBLY TO BE COVERED.
2. EXAMPLE OF PART NUMBER:
   MS18029-2S-16 INDICATES A COVER ASSEMBLY FOR A MS27212 TERMINAL BOARD ASSEMBLY HAVING 16 STUDS, .190-32 UNF
   THIS COVER ASSEMBLY WILL CONSIST OF THE FOLLOWING:
   1 - MS18029-12S-16 TYPE S COVER
   2 - MS18029-22 NUT ASSEMBLIES
   COVER ASSEMBLY MS PART NUMBER SHALL BE MARKED ON TOP OF COVER.
3. THE GOVERNMENT SERVICES SHALL PROCURE AND STOCK ONLY COVERS MS18029-11L-20, -11S-20, -12L-16, 12S-16, -13L-8, 13S-8, -14L-16, 14S-16, AND NUT ASSEMBLIES MS18029-21 THROUGH -26.
4. THE INSTALLING ACTIVITY SHALL FABRICATE COVER ASSEMBLIES FROM PARTS TO BE STOCKED.
5. (N) CODE IS FOR INDUSTRY USE ONLY, FOR THE PROCUREMENT OF COVER ASSEMBLIES OF VARIOUS LENGTHS.
6. COVER ASSEMBLIES ARE NOT TO BE USED IN INSTALLATIONS WHERE THE TEMPERATURE EXCEEDS 475° F.
7. A MINIMUM OF THREE THREADS MUST BE EXPOSED AFTER TERMINAL STACKING OR THE END STUDS FOR COVER INSTALLATION.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(E) ENTIRE STANDARD REVISED AND REDRAWN

| P.A. NAVY - AS<br>Other Cust<br>AIR FORCE - 80<br>ARMY - EL | TITLE<br>COVER ASSEMBLY, ELECTRICAL, FOR MS27212 TERMINAL BOARD ASSEMBLY | MILITARY STANDARD<br>MS18029 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES:<br>MS18029(AS) | SHEET 1 OF 3 |

DD FORM 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PLATE 80, 15320


APPROVED 10 APRIL 1963 REVISED (E) 14 MAY 71

REVIEWER SYMBOLS: AIR FORCE - AO, 17 ARMY - EL, MI NAVY - DSA - GS
USER SYMBOLS: NAVY - MC

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.

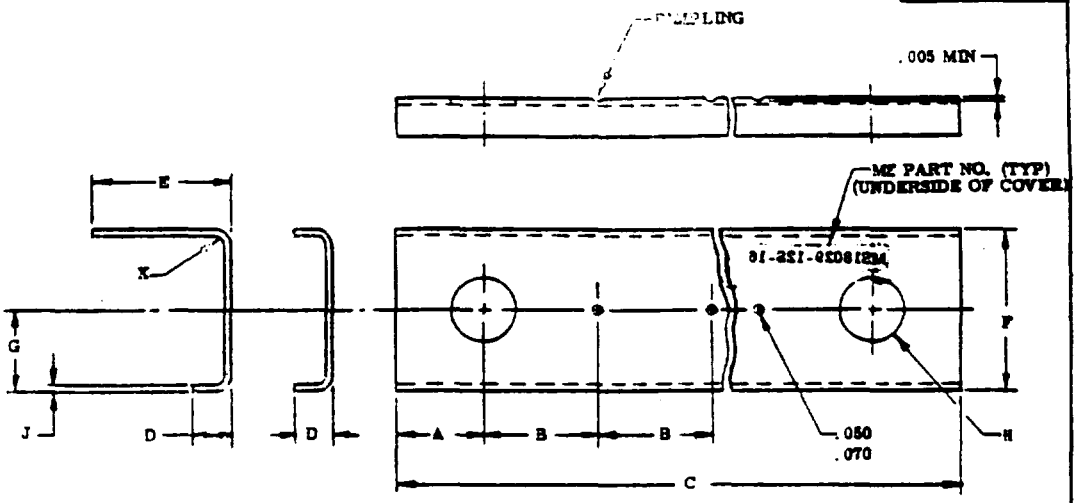


TYPE L TYPE S

COVER

| MS DASH NO. TYPE L | MS DASH NO. TYPE S | STUD SIZE (REF) | MAX. NO. OF STUDS (REF) | A | B ±.016 | C MAX (REF) | D ±.030 | E ±.030 TYPE L | F | G | H DIA ±.002 | J ±.010 | K RAD |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -11L-(N) | -11S-(N) | .138-32 | 20 | .515 | .594 | 12.334 | .234 | .734 | .813 | .406 | .430 | .034 | .062 |
| -12L-(N) | -12S-(N) | .190-32 | 16 | .593 | .750 | 12.454 | .234 | .906 | 1.063 | .531 | | | |
| -13L-(N) | -13S-(N) | .250-28<br>.312-24<br>.375-24 | 8 | 1.062 | 1.500 | 12.641 | .375 | 1.312 | 1.500 | .750 | .664 | .050 | .125 |
| -14L-(N) | -14S-(N) | .164-32 | 16 | .593 | .750 | 12.454 | .234 | .734 | .813 | .406 | .430 | .034 | .062 |

NOTES:

1. MATERIAL: PLASTIC, LAMINATE, IN ACCORDANCE WITH MIL-P-25518. TYPE L
2. TOLERANCE BETWEEN ANY TWO "B" DIMENSIONS SHALL BE WITHIN ±.010.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED; TOLERANCE: DECIMALS ±.016.
4. DIMPLING IS TO ENSURE CORRECT POSITIONING OF HOLE FOR THE NUT ASSEMBLY WHEN COVER IS USED ON TERMINAL BOARD ASSEMBLY HAVING LESS STUDS THAN THE MAXIMUM NUMBER SPECIFIED IN ABOVE TABLE.
5. EXAMPLE OF CALLOUT FOR SHORTER LENGTHS: MS18029-13L-5 IS A COVER OF THE TYPE L WITH TWO .664 DIA HOLES SPACED 6.00 INCHES FROM CENTER TO CENTER. THIS COVER WHEN ASSEMBLED WITH TWO MS18029-23 NUT ASSEMBLIES BECOMES COVER ASSEMBLY MS18029-3L-5 AND IS USED TO COVER TERMINAL BOARD ASSEMBLY MS27212-3-5.
6. COVER MS PART NUMBER SHALL BE MARKED ON UNDERSIDE OF COVER.

APPROVED 10 APRIL 1963 REVISED (E) FOR CHANGES SEE SHEETS 1, 2, AND 3

REVIEWER SYMBOLS: AIR FORCE - 80, 17 ARMY - EL, MI NAVY - DSA - GS

USER SYMBOLS: NAVY - MC

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document.

| P.A. NAVY - AS<br>Other Cust<br>AIR FORCE - 80<br>ARMY - EL | TITLE<br>COVER ASSEMBLY, ELECTRICAL, FOR MS27212 TERMINAL BOARD ASSEMBLY | MILITARY STANDARD<br>MS18029 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES:<br>MS18029(AS) | SHEET 2 |

DD FORM 1426 572-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 17709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.


REVIEWER SYMBOLS:
AIR FORCE - 80, 17
ARMY - EL, MI
NAVY -
DSA - CS


USER SYMBOLS:
NAVY - MC

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft modification should be based on the information in the current DoDISS."


This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5940

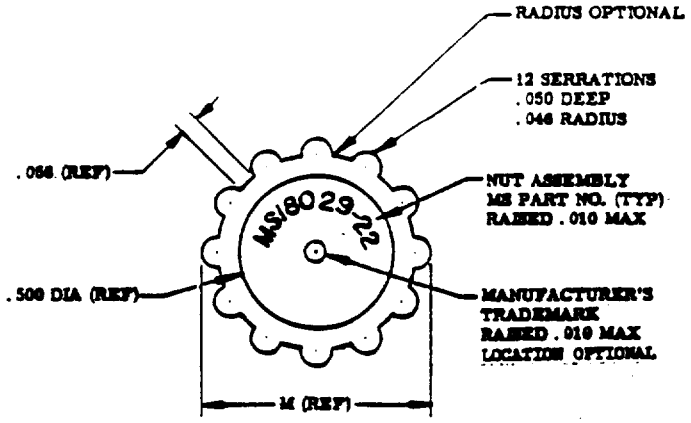


NUT ASSEMBLY

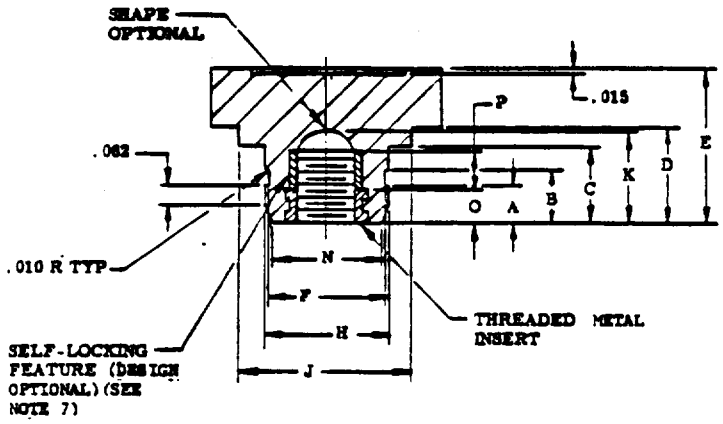


| MS DASH NO. | THREAD T INSERT | RETAINING RING | A | B | C | D REF | E REF | F DIA ±.005 | H DIA | J DIA REF | K REF | M DIA REF | N DIA ±.008 | O | P ±.0312 (REF.) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -21 | .138-32 UNC-2B | MS16624-1040 | .129 | .176 | .250 | .313 | .500 | .373 | .397 | .562 | .310 | .750 | .365 | .125 | .1250 |
| -22 | .190-32 UNF-2B | | | | | | | | | | | | | | |
| -23 | .250-28 UNF-2B | MS16624-1062 | .212 | .277 | .367 | .430 | .625 | .550 | .625 | .750 | .437 | .875 | .570 | .187 | .1875 |
| -24 | .312-24 UNF-2B | | | | | | | | | | | | | | |
| -25 | .375-24 UNF-2B | | | | | | | | | | | | | | |
| -26 | .164-32 UNC-2B | MS16624-1040 | .129 | .176 | .250 | .313 | .500 | .373 | .397 | .562 | .310 | .750 | .365 | .125 | .1250 |

NOTES:

1. MATERIAL: (a) NUT: DIALLYL PHTHALATE GDI-30F PER MIL-M-19833.
   (b) METAL INSERT: CORROSION RESISTANT STEEL. PER FED. STD. NO. 66, COMPOSITION 431.
2. THREADS: SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED; TOLERANCES: DECIMALS ±.010.
4. RETAINING RING AND NUT ARE NOT TO BE ASSEMBLED UNTIL NUT IS INSTALLED ON APPLICABLE COVER.
5. NUT ASSEMBLY MS PART NUMBER SHALL BE MARKED ON TOP OF NUT.
6. .015R OR .015 X 45° CHAMFER PERMISSIBLE ON ALL SHARP EDGES.
7. IMPERFECT THREADS WILL NOT BE PERMITTED.

APPROVED 10 APRIL 1963 REVISED (E) FOR CHANGES SEE SHEETS 1, 2, AND 3.

| P.A. NAVY - AS<br>Other Cust<br>AIR FORCE - 80<br>ARMY - EL | TITLE<br>COVER ASSEMBLY, ELECTRICAL, FOR MS27212 TERMINAL BOARD ASSEMBLY | MILITARY STANDARD<br>MS18029 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES:<br>MS18029(AS) | SHEET<br>3 |

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 15329

☆U.S. GOVERNMENT PRINTING OFFICE: 1981-505-022/8286

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.