FED. SUP CLASS
4730

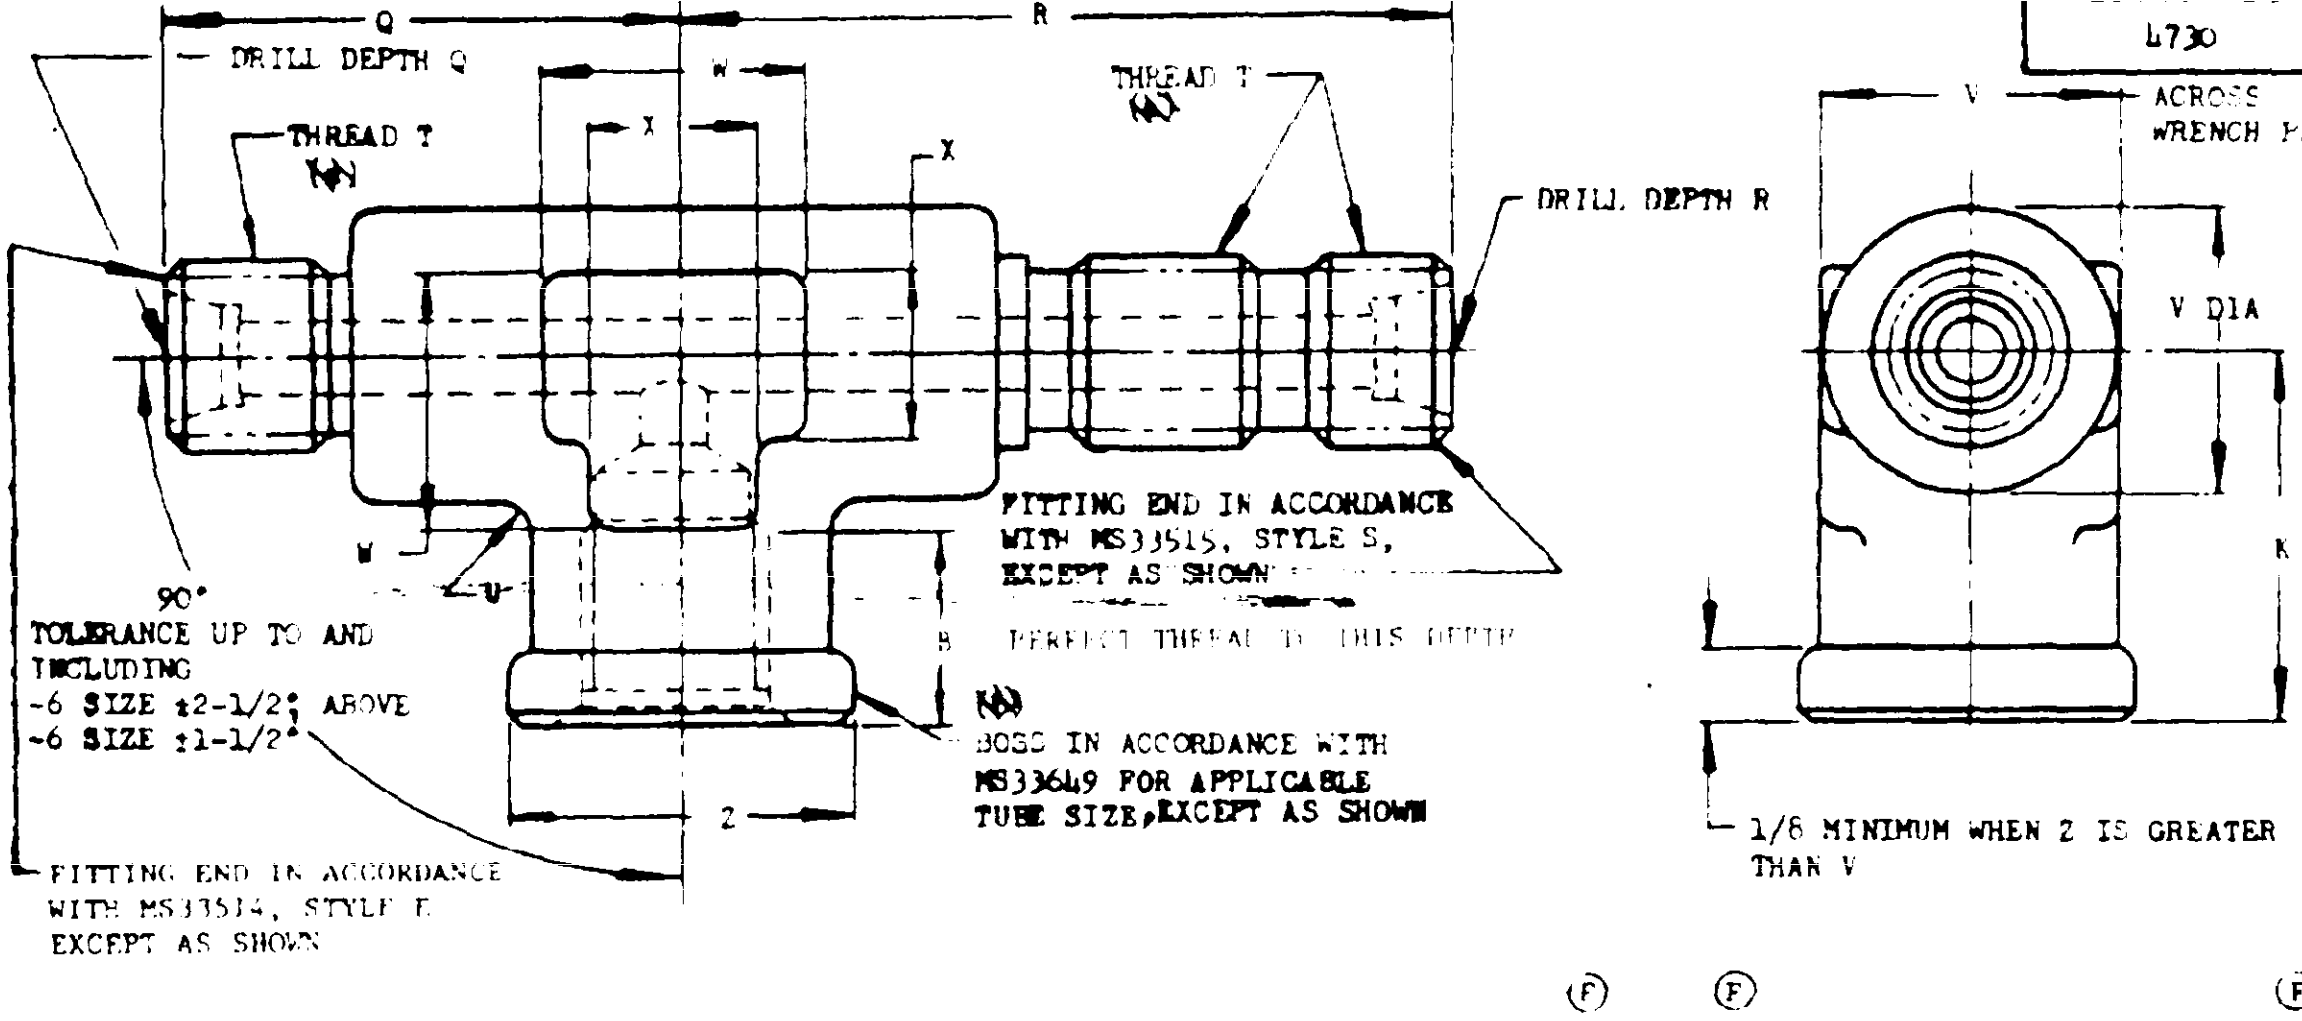
Q
R
DRILL DEPTH Q
W
X
X
THREAD T
THREAD T
DRILL DEPTH R
V
ACROSS WRENCH PAD
V DIA
K
FITTING END IN ACCORDANCE WITH MS33515, STYLE S, EXCEPT AS SHOWN
PERFECT THREAD TO THIS DEPTH
90°
TOLERANCE UP TO AND INCLUDING -6 SIZE ±2-1/2°; ABOVE -6 SIZE ±1-1/2°
W
U
B
BOSS IN ACCORDANCE WITH MS33649 FOR APPLICABLE TUBE SIZE, EXCEPT AS SHOWN
Z
1/8 MINIMUM WHEN Z IS GREATER THAN V
FITTING END IN ACCORDANCE WITH MS33514, STYLE E EXCEPT AS SHOWN

DASH NO.	TUBE OD	THREAD T MIL-S-8879	B MIN	K +3/64 -0	Q +3/64 -0	R +3/64 -0	U RAD	V	Ⓕ W APPROX	Ⓕ X APPROX	Z DIA	WT LB, MAX STEEL	AL ALLOY	Ⓕ TI ALLOY
-2	1/8	.3125-24 UNJF-3A	.375	5/8	27/32	3/8	1/16	1/2	15/32	5/16	9/16	.051	.018	.029
-3	3/16	.3750-24 UNJF-3A	.406	11/16	29/32	1-29/64	3/32	9/16	1/2		5/8	.104	.039	.060
-4	1/4	.4375-20 UNJF-3A	.438	3/4	1- 3/32	1-43/64		3/4	11/16	7/16	3/4	.233	.083	.134
-5	5/16	.5000-20 UNJF-3A										.278	.099	.160
-6	3/8	.5625-18 UNJF-3A	.469	13/16	1- 5/32	1-57/64		7/8	25/32		7/8	.326	.116	.188
-8	1/2	.7500-16 UNJF-3A	.562	1	1-11/32	2- 1/32	1/8	1-1/16	29/32	1/2	1- 1/16	.554	.197	.319
-10	5/8	.8750-14 UNJF-3A	.625	1- 5/32	1- 1/2	2- 1/4					1- 3/16	.579	.206	.334
-12	3/4	1.0625-12 UNJ-3A	.688	1-11/32	1-41/64	2- 7/16		1-5/16	1- 3/32	5/8	1- 7/16	1.012	.360	.583
-16	1	1.3125-12 UNJ-3A		1-17/32	1-27/32	2-21/32		1-5/8	1- 5/16	3/4	1-11/16	1.340	.455	.773
-20	1-1/4	1.6250-12 UNJ-3A		1 23/32	1-63/64	2-51/64		1-7/8	1- 1/2	7/8	2	1.950	.672	1.125

Ⓕ ~~(a) PARTS WITH THREADS IN ACCORDANCE WITH MIL-S-7742 OF THE SAME THREAD SIZE, PITCH AND TOLERANCE CLASS ARE ACCEPTABLE FOR PROCUREMENT UNTIL 1 JULY 1981, BUT PARTS WITH MIL-S-7742 THREADS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

Ⓕ ~~(b) PARTS WITH BOSS IN ACCORDANCE WITH AND10066 FOR THE APPLICABLE TUBE SIZE ARE ACCEPTABLE FOR PROCUREMENT UNTIL 1 JULY 1981, BUT PARTS WITH THE AND10066 BOSS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

1. MATERIAL: CARBON STEEL - FORGINGS
   ALUMINUM ALLOY - FORGINGS
   CORROSION RESISTANT STEEL - FORGINGS
   Ⓕ TITANIUM ALLOY - FORGINGS
   } Ⓕ SEE PROCUREMENT SPECIFICATION
   NOTE: PARTS MADE FROM 1137 OR 1141 FORGINGS QUALIFIED TO MIL-F-18280C SHALL NOT BE SUPPLIED AFTER 30 JUNE 1984.
2. FINISH: SEE PROCUREMENT SPECIFICATION
3. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
4. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.
5. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
   ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (2014).
   ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   ~~ADD C AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 302, 303, 304, 316 or 321~~
   ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
   ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
   ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 27 JUNE 1969.
   Ⓕ ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V)

EXAMPLES OF PART NUMBERS:
MS21910-8 - TEE, 1/2 TUBING, CARBON STEEL.
MS21910D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (2014).
MS21910W8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (7075).
MS21910J8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
MS21910K8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
MS21910-8S - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
Ⓕ MS21910-8T - TEE, 1/2 TUBING, TITANIUM ALLOY (6AL-4V)

Ⓕ DENOTES CHANGES

User activities: Navy - OS
Army - EL, CR, ME, AT

Review activities: USAF - 11
Army - AR, MI
DIA CS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 Oct 51
REVISED Ⓐ 28 Jun 54 Ⓑ 3 Jun 55 Ⓒ 2 May 56 Ⓓ 13 Nov 58 Ⓔ 27 June 69 Ⓕ 26 JUNE 1981

P.A. Navy-AS Other Cust USAF - 99 Army - AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON SIDE	MILITARY STANDARD MS21910
PROCUREMENT SPECIFICATION MIL-F-18280	SUPERSEDES:		SHEET 1 OF 2

PROJECT NO. 4730-0154

DD FORM 1 SEP 57 672-1 (Coordinated)
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
NAVY - OS
ARMY - GL, CR, ME, AT

REVIEWER SYMBOLS:
NAVY -
USAF - 11
ARMY - AR, MI
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
4730

Ⓕ 6. ~~PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 JUNE 1969. PARTS CODED C MAY BE USED UNTIL STOCKS ARE EXHAUSTED. PARTS CODED J OR K MAY BE USED IN LIEU OF PARTS CODED C.~~

Ⓕ ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR S (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

7. CERTAIN PROVISIONS (SCREW THREADS, BOSS DIMENSIONS AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

Ⓕ 8. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 4 OCT 51 REVISED Ⓕ FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust USAF-99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON SIDE	**MILITARY STANDARD** **MS21910**
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:41Z
Check the source to verify that this is the currentversion before use.