USER DOMICILE:
ARMY - GL, CR, ME, AT


REVIEWER DOMICILE:
USAF - 82
ARMY - AR, MI
DLA - CS

"Review/user information is current as of the date of this document for future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
4730

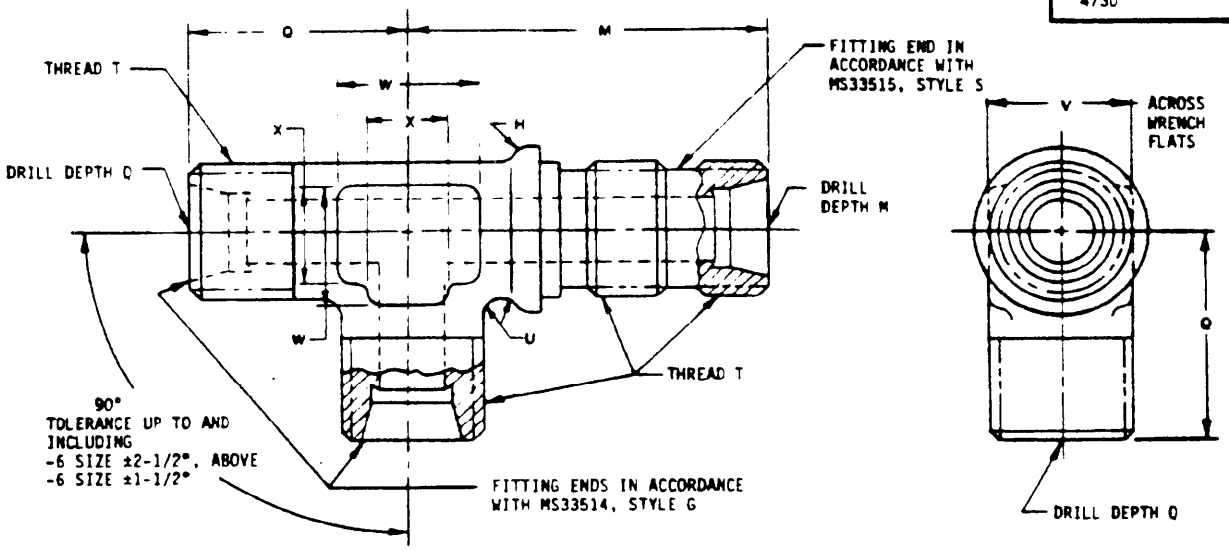

DASH NO.	TUBE OD	THREAD T MIL-S-8879	H RAD	M +.047 -0	Q +.047 -0	U RAD	V	W APPROX	X APPROX	WT STEEL	LB ALUM	MAX TI
-2	1/8	.3125-24 UNJF-3A	.063	1.313	.781	.063	.313	.313	.188	.064	.023	.036
-3	3/16	.3750-24 UNJF-3A		1.391	.906		.375	.375	.250	.074	.026	.042
-4	1/4	.4375-20 UNJF-3A		1.500	.938		.438			.091	.033	.052
-5	5/16	.5000-20 UNJF-3A	.094	1.531	1.031	.094	.500	.469	.313	.126	.048	.072
-6	3/8	.5625-18 UNJF-3A		1.688	1.063		.563	.500		.155	.056	.089
-8	1/2	.7500-16 UNJF-3A		1.969	1.313		.750	.688	.438	.290	.112	.167
-10	5/8	.8750-14 UNJF-3A		2.250	1.500	.125	.875	.781		.455	.166	.262
-12	3/4	1.0625-12 UNJ-3A		2.469	1.625		1.063	.906	.500	.677	.245	.390
-16	1	1.3125-12 UNJ-3A	.125	2.594	1.719		1.313	1.094	.625	.962	.342	.555
-20	1-1/4	1.6250-11 UNJ-3A		2.875	2.000	.188	1.625	1.313	.750	1.600	.635	.923
-24	1-1/2	1.8750-12 UNJ-3A		3.156	2.188		1.875	1.500	.875			
-32	2	2.5000-13 UNJ-3A		3.750	2.375		2.563	2.031	1.094			

REQUIREMENTS:

1. MATERIAL: CARBON STEEL - FORGINGS
   ALUMINUM ALLOY - FORGINGS
   CORROSION RESISTANT STEEL - FORGINGS
   TITANIUM ALLOY - FORGINGS
   SEE PROCUREMENT SPECIFICATION.

2. FINISH: SEE PROCUREMENT SPECIFICATION.

NOTES:

1. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±1/2°

3. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
   ADD "D" IN PLACE OF DASH FOR ALUMINUM ALLOY (2014).
   ADD "W" IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   ADD "J" IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
   ADD "K" IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
   ADD "T" AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).
   ADD "R" AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 321.

   EXAMPLES OF PART NUMBERS:
   MS21912-4 - TEE, 1/4 TUBING, CARBON STEEL.
   MS21912D4 - TEE, 1/4 TUBING, ALUMINUM ALLOY (2014).
   MS21912W4 - TEE, 1/4 TUBING, ALUMINUM ALLOY (7075).
   MS21912J4 - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
   MS21912K4 - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
   MS21912-4T - TEE, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).
   MS21912-4R - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 321.

4. ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR R (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

5. TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

(G) ENTIRE STANDARD REVISED

AMSC N/A

REVISED (G) 31 AUGUST 88

APPROVED 4 OCT 91

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY — AS Other Cust USAF - 99 ARMY - AV	(G)	TEE, FLARELESS TUBE WITH BULKHEAD ON RUN	MS21912
PROCUREMENT SPECIFICATION MIL-F-18280	SUPERSEDES: MS21912 (ASG)		SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

6. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 347 CRES AFTER 31 DEC 1989. HOWEVER, TYPE CODE "S" PARTS MAY BE USED UNTIL EXISTING STOCKS ARE DEPLETED.

7. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

8. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 4 OCT 91 REVISED (G) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST (G)	TITLE TEE, FLARELESS TUBE WITH BULKHEAD ON RUN	MILITARY STANDARD MS21912
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES MS21912 (ASG)	SHEET 2 OF 2

DD FORM 672-1 (Coordinated)

PROJECT NO. 4730-0973

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEW PREPARE: USAF - 82 ARMY - AR, MI DLA - CS

USER PREPARE: ARMY - GL, CR, ME, AT

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:41Z
Check the source to verify that this is the current version before use.