
FED. SUP CLASS
4730

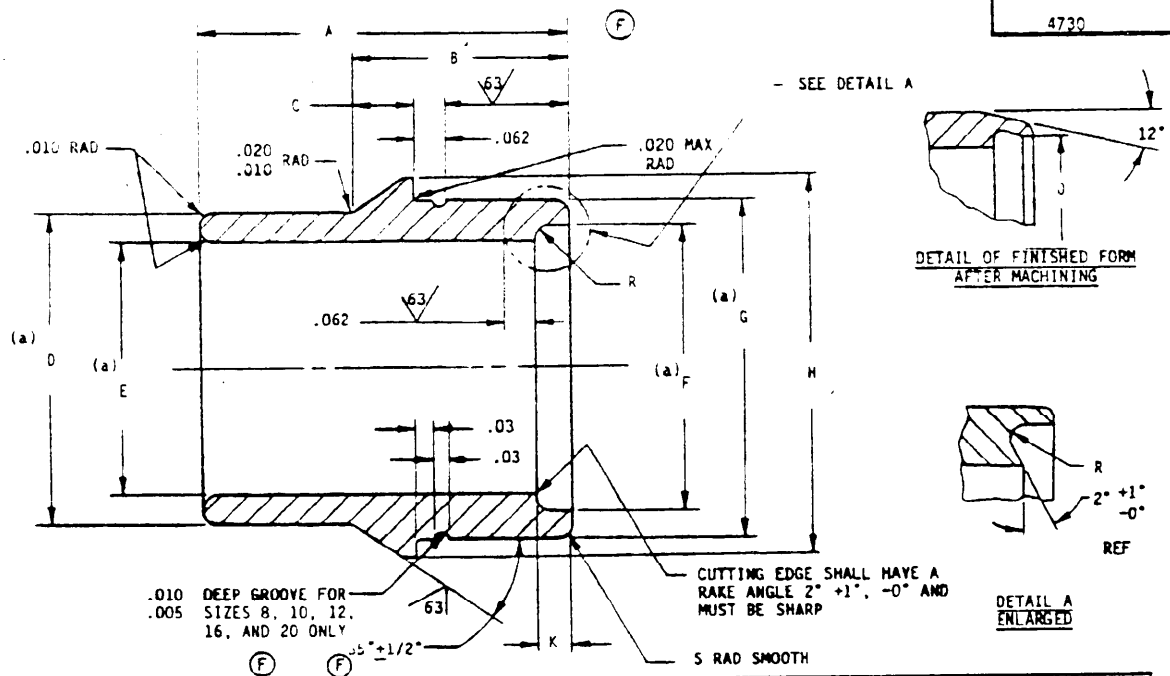


| DASH NO. STL | DASH NO. CRES | TUBE SIZE | A ±.01 | B ±.003 | C +.005 -.000 | D | E +.003 -.000 | F +.006 -.000 | G +.004 -.000 | H | J +.008 -.000 | K +.008 -.000 | R MAX | R MIN | S +.005 -.000 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -2 | -2C | 1/8 | .41 | .316 | .098 | .164 | .129 | .154 | .175 | .256 | .148 | .024 | .006 | .003 | .010 |
| -3 | -3C | 3/16 | .45 | .278 | .060 | .226 | .193 | .227 | .252 | .299 | .221 | .020 | | | .007 |
| -4 | -4C | 1/4 | .52 | .336 | | .294 | .255 | .286 | .309 | .359 | .280 | .024 | | | |
| -5 | -5C | 5/16 | .59 | | | .360 | .318 | .350 | .373 | .422 | .344 | | | | |
| -6 | -6C | 3/8 | .66 | .375 | | .419 +.004 -.000 | .380 | .408 | .435 | .484 | .402 | | | | |
| -8 | -8C | 1/2 | .75 | | | .546 | .506 | .556 | .585 | .619 | .550 | | | | |
| -10 | -10C | 5/8 | .80 | .415 | .090 | .682 | .633 | .669 | .707 | .750 | .663 | | .014 | .008 | .010 |
| -12 | -12C | 3/4 | .75 | | .120 | .817 | .758 | .807 | .836 | .938 | .801 | | | | |
| -16 | -16C | 1 | .80 | | | 1.065 | 1.008 | 1.057 | 1.086 | 1.156 | 1.051 | | | | |
| -20 | -20C | 1-1/4 | | | | 1.320 | 1.258 | 1.310 | 1.339 | 1.437 | 1.304 | | | | |
| -24 | -24C | 1-1/2 | | | | 1.570 +.005 -.000 | 1.511 | 1.560 | 1.589 | 1.687 | 1.554 | | | | |
| -32 | -32C | 2 | | | .150 | 2.070 | 2.011 | 2.063 | 2.092 | 2.218 | 2.057 | | | | |

(a) CIRCULAR SURFACES OF DIAMETERS D,E,F, AND G SHALL BE CONCENTRIC WITHIN .005 TOTAL INDICATOR READING, AND TRUE WITH CENTERLINE.

REQUIREMENTS:

1. MATERIAL: CARBON STEEL AND CORROSION RESISTANT STEEL, BARS. SEE PROCUREMENT SPECIFICATION.
2. FINISH: SEE PROCUREMENT SPECIFICATION.

(F) REVISED AND REDRAWN

| | | | |
|---|---|---|---|
| P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV | INTERNATIONAL INTEREST | TITLE: SLEEVE, COUPLING, FLARELESS | MILITARY STANDARD MS21922 |
| PROCUREMENT SPECIFICATION MIL-F-18280 | SUPERSEDES: MS21922 | | SHEET 1 OF 2 |

DD FORM 1 JAN 72 672-1 (Continuation)

AMSC N/A

REVISED (F) 4 April 1988
APPROVED 27 Feb 56

USER SYMBOLS: ARMY-ME, AT NAVY-OS

REVIEWER SYMBOLS: ARMY-AR, MI, AV NAVY-AS USAF-82, 71 DLA -CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairable use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:41Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
ARMY-ME, AT
NAVY-OS


REVIEWER SYMBOLS
ARMY-AR, MI, AV
NAVY-AS
USAF-82, 71
DLA-CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
4730

NOTES:

1. FOR SURFACE ROUGHNESS, SEE ANSI B46.1.
2. BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
3. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.
4. PART NO.: ADD C AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, AMS5643 (17-4-PH).
5. EXAMPLE OF PART NO.:




6. LETTERS MS NOT TO BE MARKED ON THIS PART.
7. INTERCHANGEABILITY RELATIONSHIP: MS21918 AND MS21922 PARTS IDENTIFIED BY THE SAME DASH NUMBER ARE FUNCTIONALLY INTERCHANGEABLE. USE MS21921 AND MS21922 AS AN ASSEMBLY WHEN SUBSTITUTING FOR MS21917 AND MS21918.
8. F DIAMETER, K LENGTH, R RADIUS, S RADIUS AND 2° EDGE ANGLE ARE NON-INSPECTABLE AFTER PRODUCTION OF 12° PILOT ANGLE.
9. PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 SEPTEMBER 1974. USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT.
10. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
11. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
12. OVALITY: THE INCREASE OR DECREASE OF DIMENSIONS D, E, F, OR G DUE TO WARPAGE CAUSED BY HEAT TREATMENT SHALL NOT EXCEED THE SPECIFIED DIMENSIONS, INCLUDING TOLERANCES, BY MORE THAN .004 FOR SIZES -2 THROUGH -12, NOR MORE THAN .006 FOR SIZES -16 THROUGH -32 WHEN MEASURED AFTER HEAT TREATMENT.

APPROVED 27 Feb: 56 REVISED (F) FOR CHANGES SEE SHEETS 1 AND 2

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

| P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV | INTERNATIONAL INTEREST | TITLE: SLEEVE, COUPLING, FLARELESS | MILITARY STANDARD MS21922 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION: MIL-F-18280 | | SUPERSEDES: MS21915 | SHEET 2 OF 2 |

DD FORM 1 MAR 72 672-1 (Copy furnished)

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T14:41Z
Check the source to verify that this is the current version before use.

PLATE NO. 22000