This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

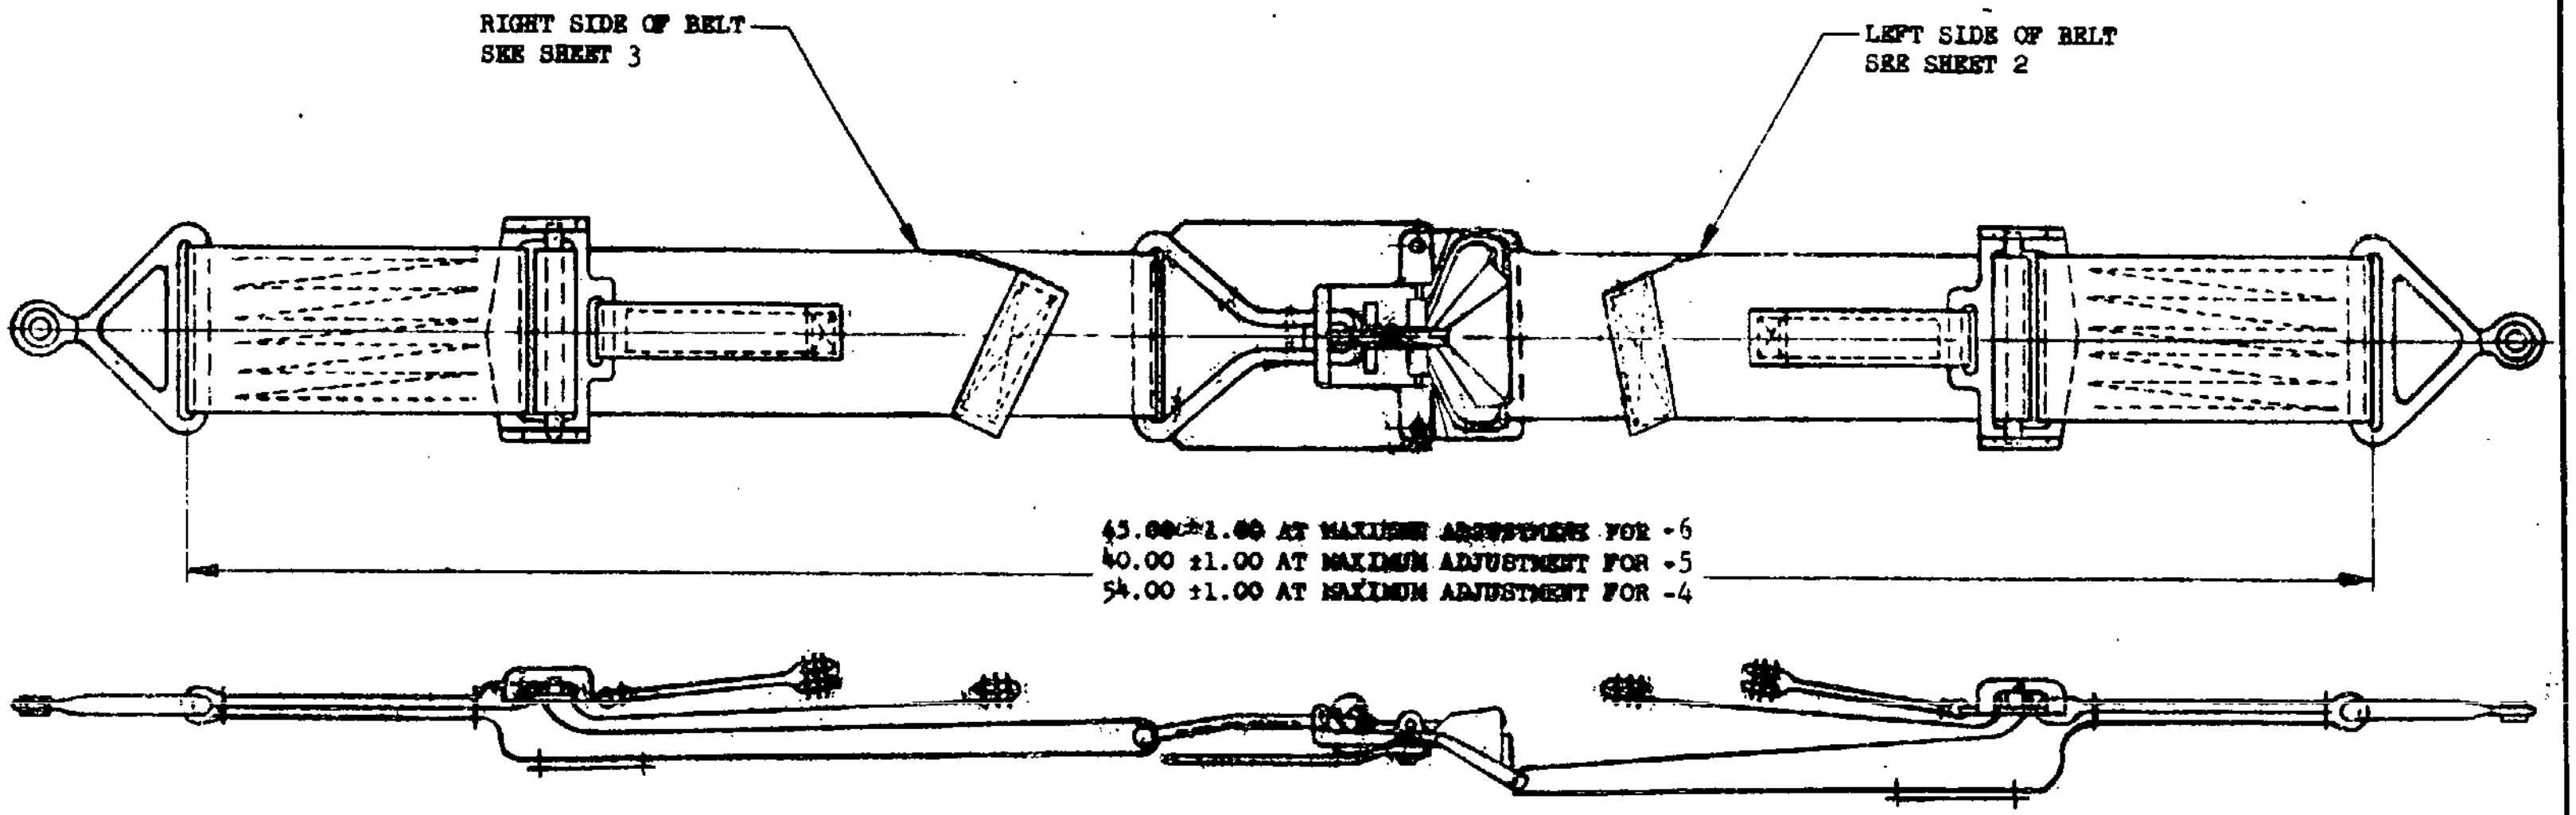
RIGHT SIDE OF BELT
SEE SHEET 3
LEFT SIDE OF BELT
SEE SHEET 2
43.00 ±1.00 AT MAXIMUM ADJUSTMENT FOR -6
40.00 ±1.00 AT MAXIMUM ADJUSTMENT FOR -5
54.00 ±1.00 AT MAXIMUM ADJUSTMENT FOR -4

BELT ASSEMBLY

ASSY DASH NO.	FORMER DASH NO.
-4	-1
-5	-2
-6	-3

MS22033-1, -2 & -3 ARE CANCELED.
EXISTING STOCKS SHOULD BE USED UNTIL DEPLETED

NOTES:

1. MATERIAL:
   - a. WEBBING, NYLON, SPECIFICATION MIL-W-8630,TYPE III, SAGE GREEN.
   - b. PULL TAB, NYLON, SPECIFICATION MIL-W-4088,TYPE II, CONDITION U, OR MIL-T-5038, TYPE IV, SAGE GREEN.
   - c. POCKET, NYLON, SPECIFICATION MIL-T-5038, TYPE II, SAGE GREEN.
   - d. THREAD, NYLON, SPECIFICATION V-T-295,TYPE I, NO. 6 CORD, SAGE GREEN.
   - e. THREAD, NYLON, SPECIFICATION V-T-295,TYPE I, SIZE E, SAGE GREEN.

2. FINISH: MATERIAL DYED SAGE GREEN SHALL BE A VISUAL MATCH TO USAF SAGE GREEN NO. 1531
   ALL STITCHING SHALL BE IN ACCORDANCE WITH FED STD NO. 751,TYPE 301, WITH NOT LESS THAN 4 NOR MORE THAN 6 STITCHES PER INCH, EXCEPT AS NOTED. ENDS OF STITCHING TO BE BACKSTITCHED A DISTANCE OF NOT LESS THAN 1/2 INCH. STITCHING TO BE WITH NO. 6 CORD NYLON THREAD, EXCEPT AS NOTED.
   SEAR EXPOSED ENDS OF WEBBING TO PREVENT FRAYING. AVOID FORMING SHARP EDGES.

3. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.06.

4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

FED. SUP CLASS
1680

APPROVED 25 OCT 57 **REVISED** Ⓔ 6 APRIL 82

Ⓔ REVISED AND REDRAWN

P.A. **NAVY - AS** **Other Cust**	**TITLE** BELT, AIRCRAFT SAFETY, LAP	**MILITARY STANDARD** **MS22033(AS)**
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	**SUPERSEDES:** NAF 1201-8B, MS22033(WEP)	**SHEET** 1 **OF** 3

DD FORM 672-1 (Limited ...) PROJECT NO. 1680-N502

FED. SUP CLASS
1680

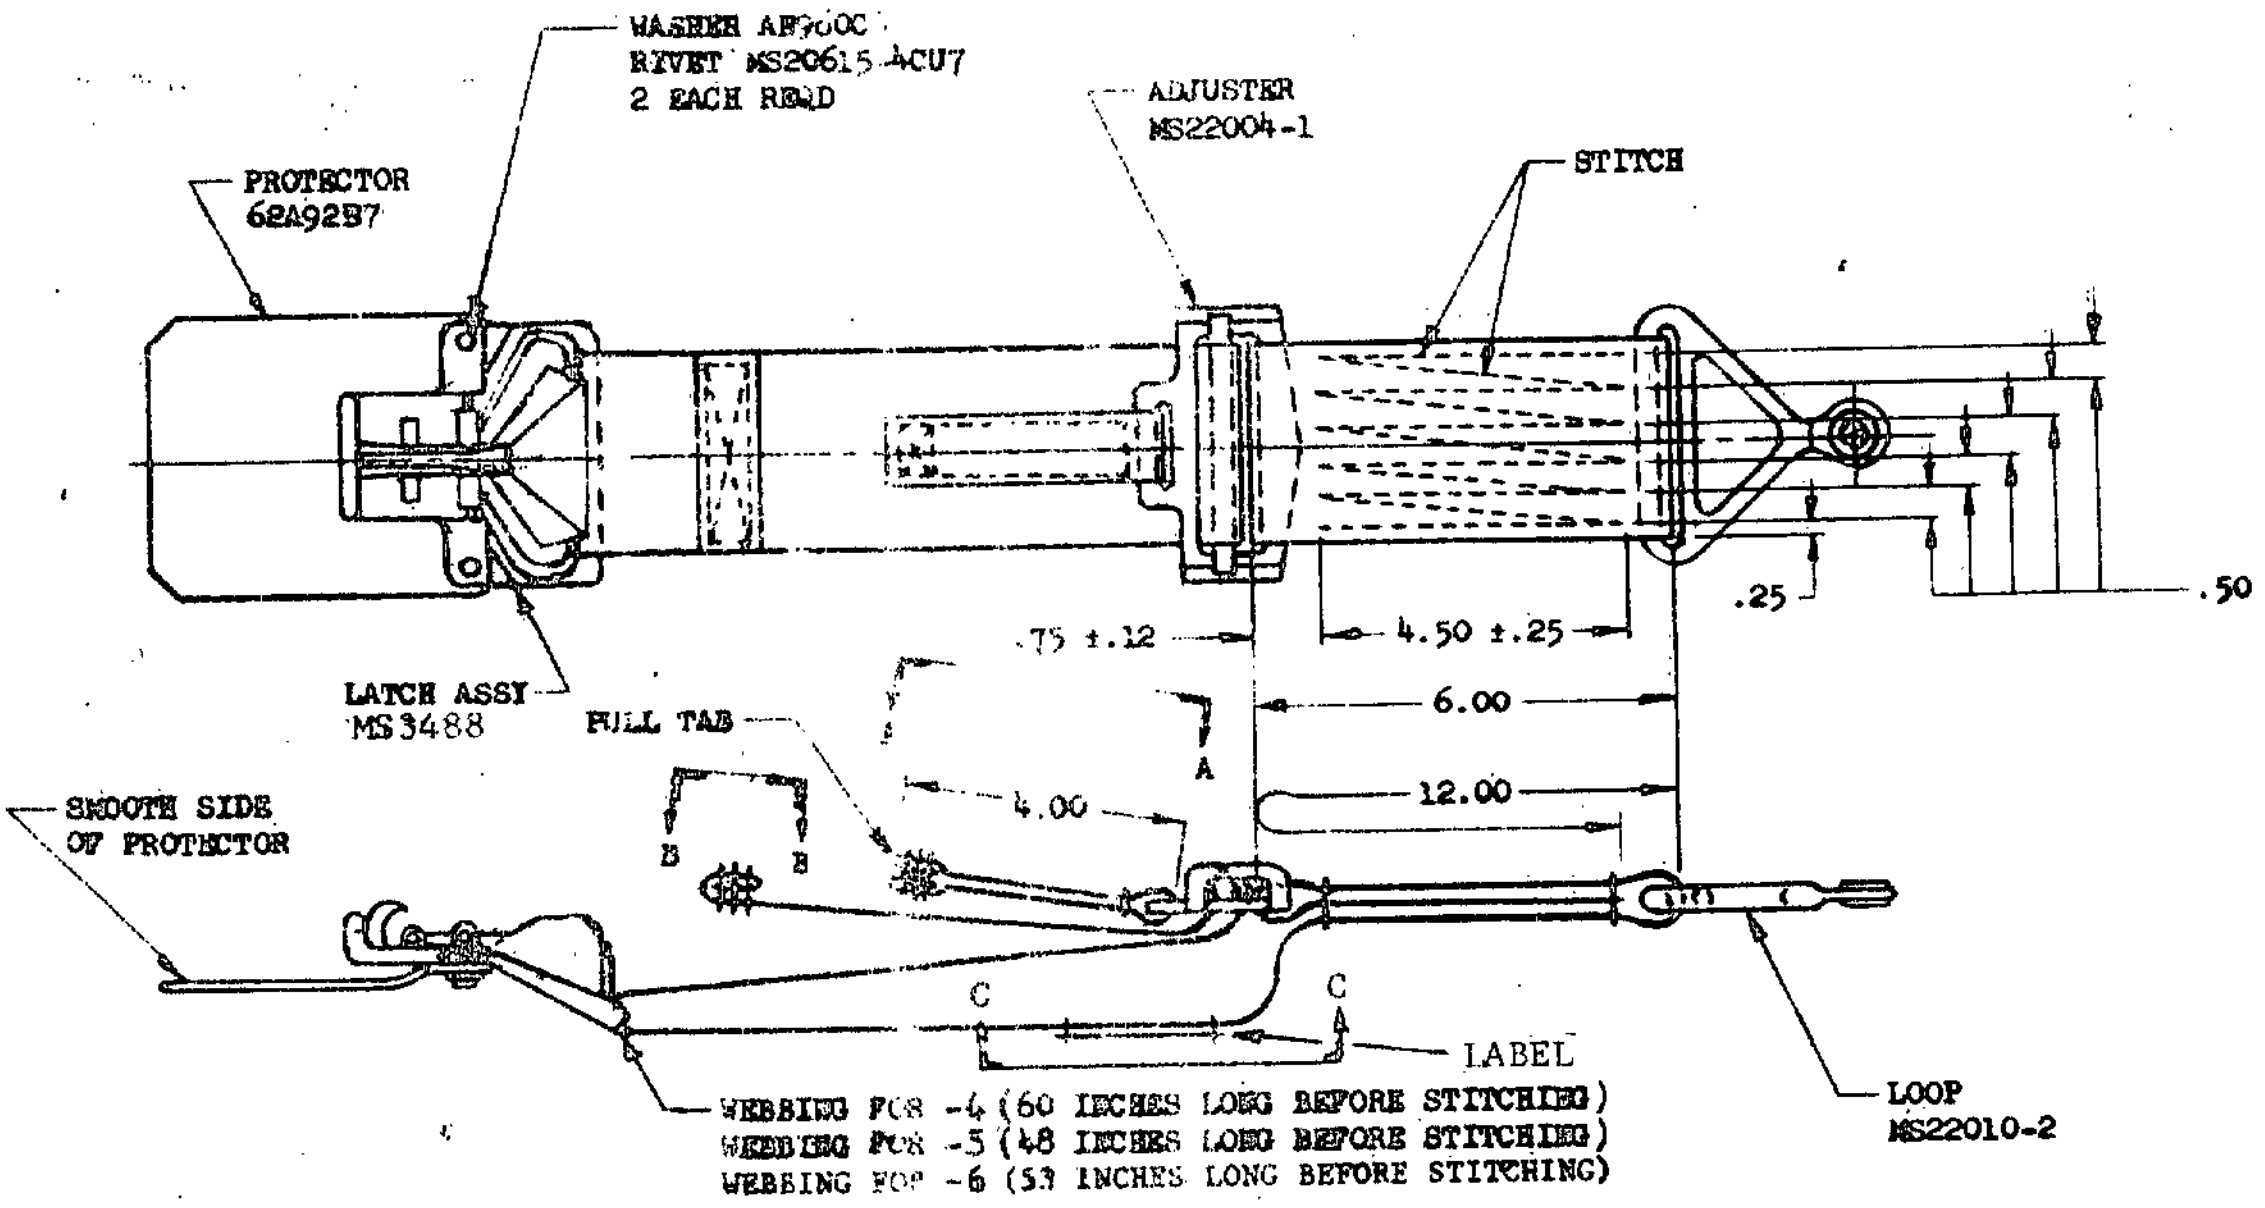

LEFT SIDE OF BELT

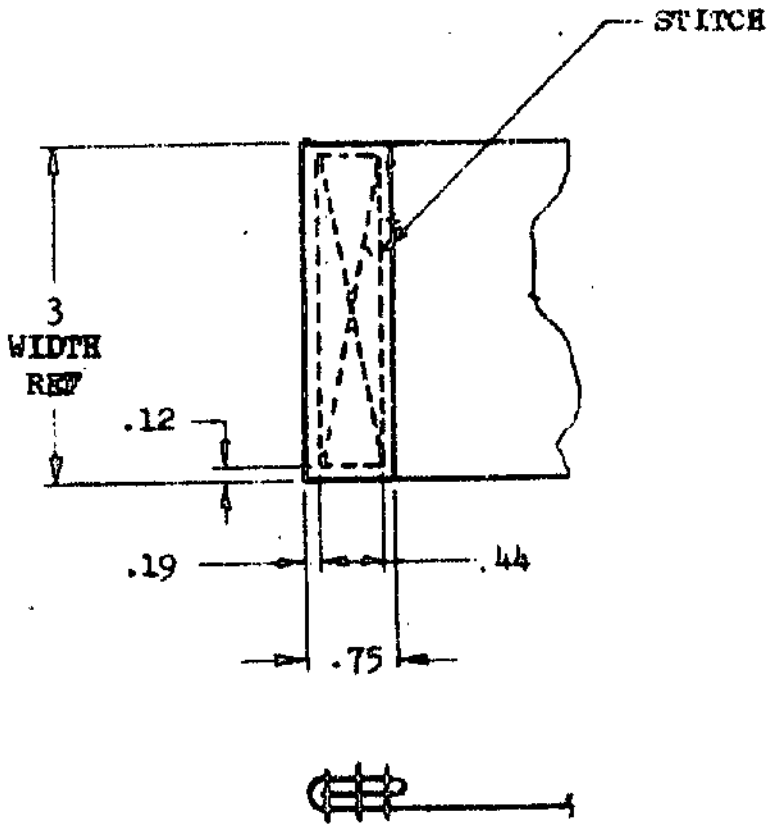

VIEW B-B
ENLARGED

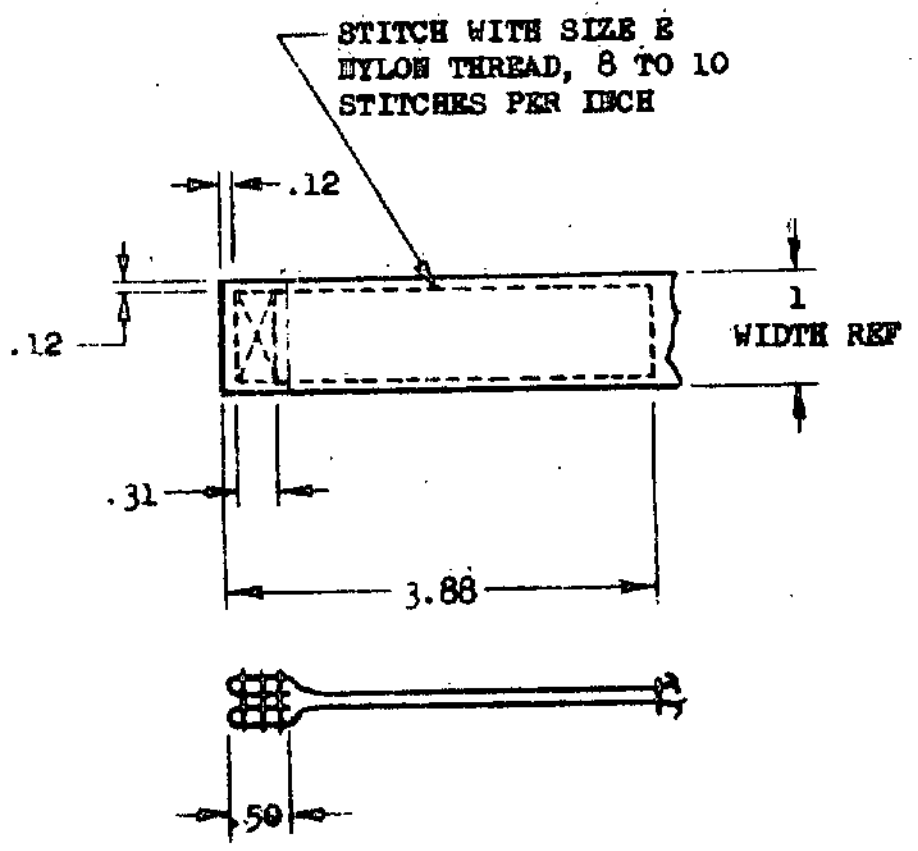

VIEW A-A
ENLARGED

APPROVED 25 OCT 57 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 3

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE BELT, AIRCRAFT SAFETY, LAP	MILITARY STANDARD MS22033(AS)
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: NAF 1201-8?, MS22033(WEP)	SHEET 2 OF 3

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO.

FED. SUP CLASS
1680

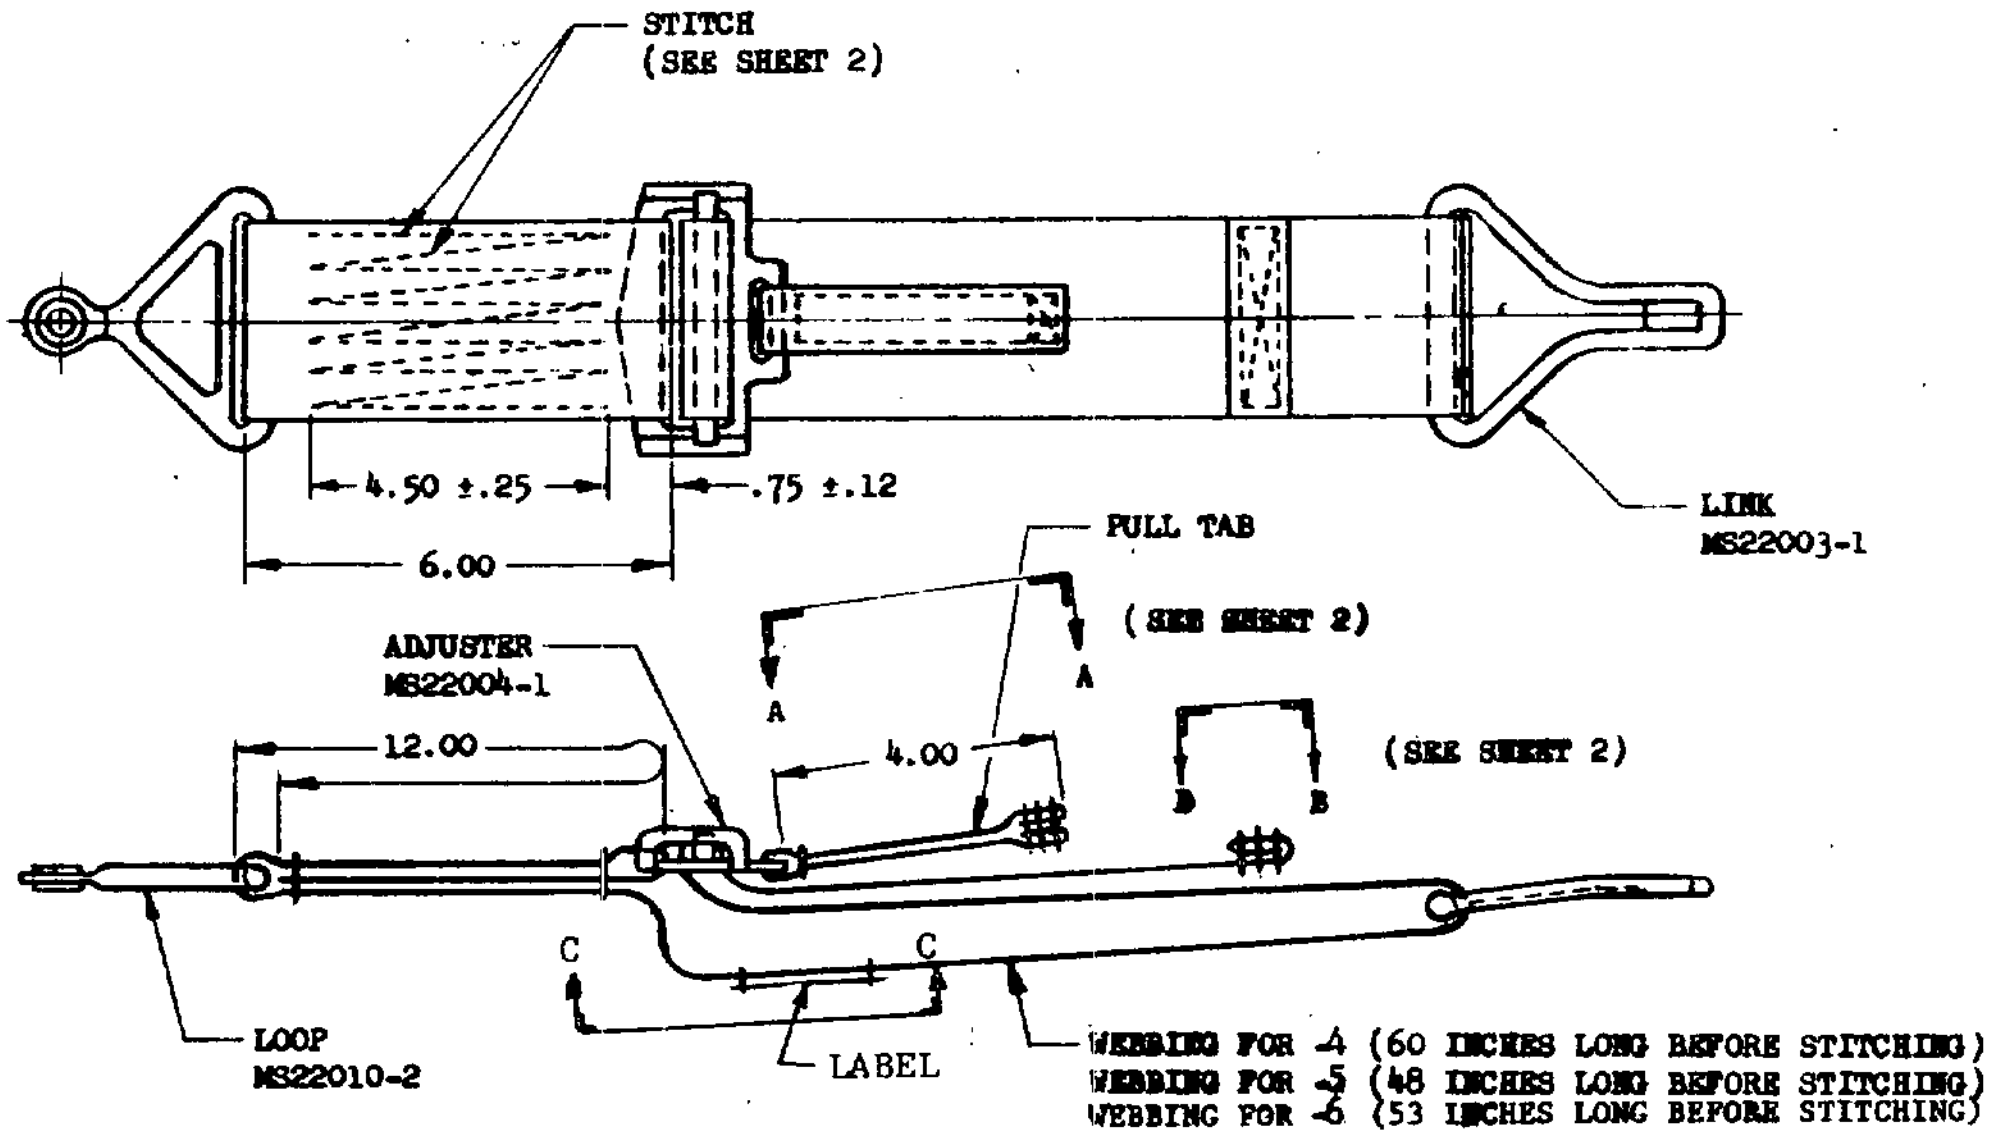
STITCH
(SEE SHEET 2)
4.50 ±.25
.75 ±.12
6.00
LINK
MS22003-1
PULL TAB
(SEE SHEET 2)
A
A
ADJUSTER
MS22004-1
12.00
4.00
(SEE SHEET 2)
B
B
C
C
LOOP
MS22010-2
LABEL
WEBBING FOR -4 (60 INCHES LONG BEFORE STITCHING)
WEBBING FOR -5 (48 INCHES LONG BEFORE STITCHING)
WEBBING FOR -6 (53 INCHES LONG BEFORE STITCHING)

RIGHT SIDE OF BELT
(FOR DIMENSIONS NOT SHOWN SEE
SHEET 2)

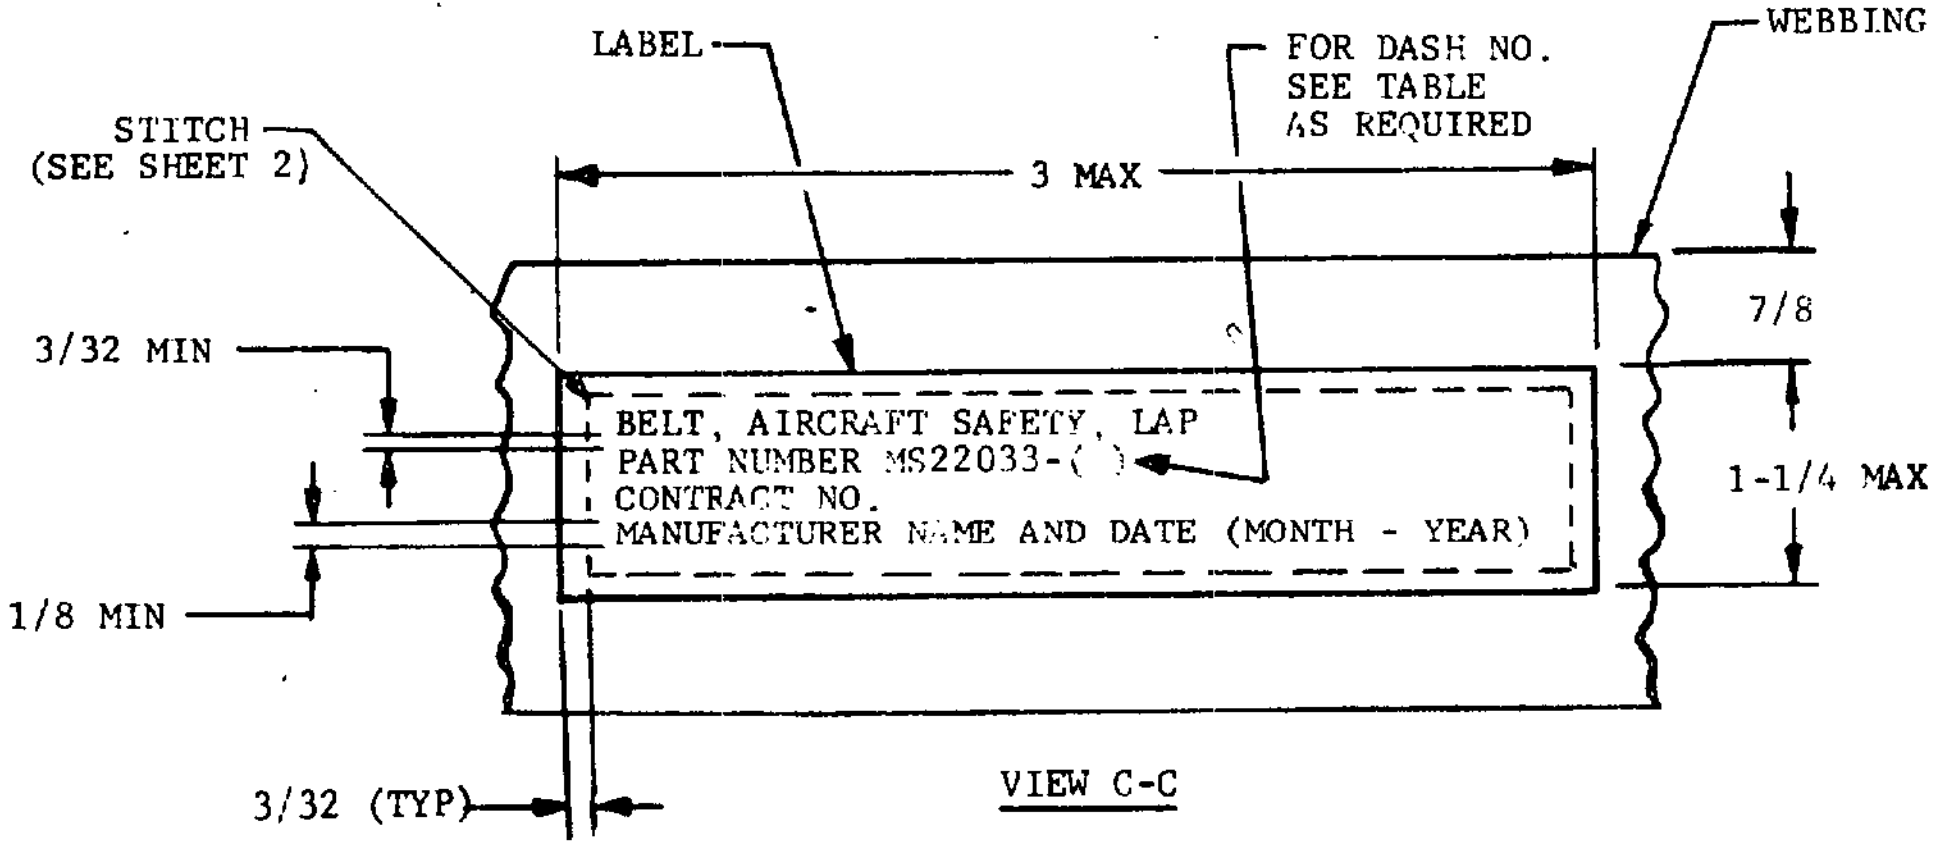

VIEW C-C

LABEL SHALL BE IN ACCORDANCE WITH
FEDERAL SPEC DDD-L-20, TYPE II,
CLASS 11 (ELEVEN)

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 25 OCT 57 REVISED E FOR CHANGES SEE SHEETS 1 THRU 3

P.A. NAVY – AS Other Cust	TITLE BELT, AIRCRAFT SAFETY, LAP	MILITARY STANDARD MS22033(AS)
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: NAF 1201-8B, MS22033(WEP)	SHEET 3 OF 3

DD FORM 672-1 *(Limited coordination)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.