
FED. SUP CLASS
4730

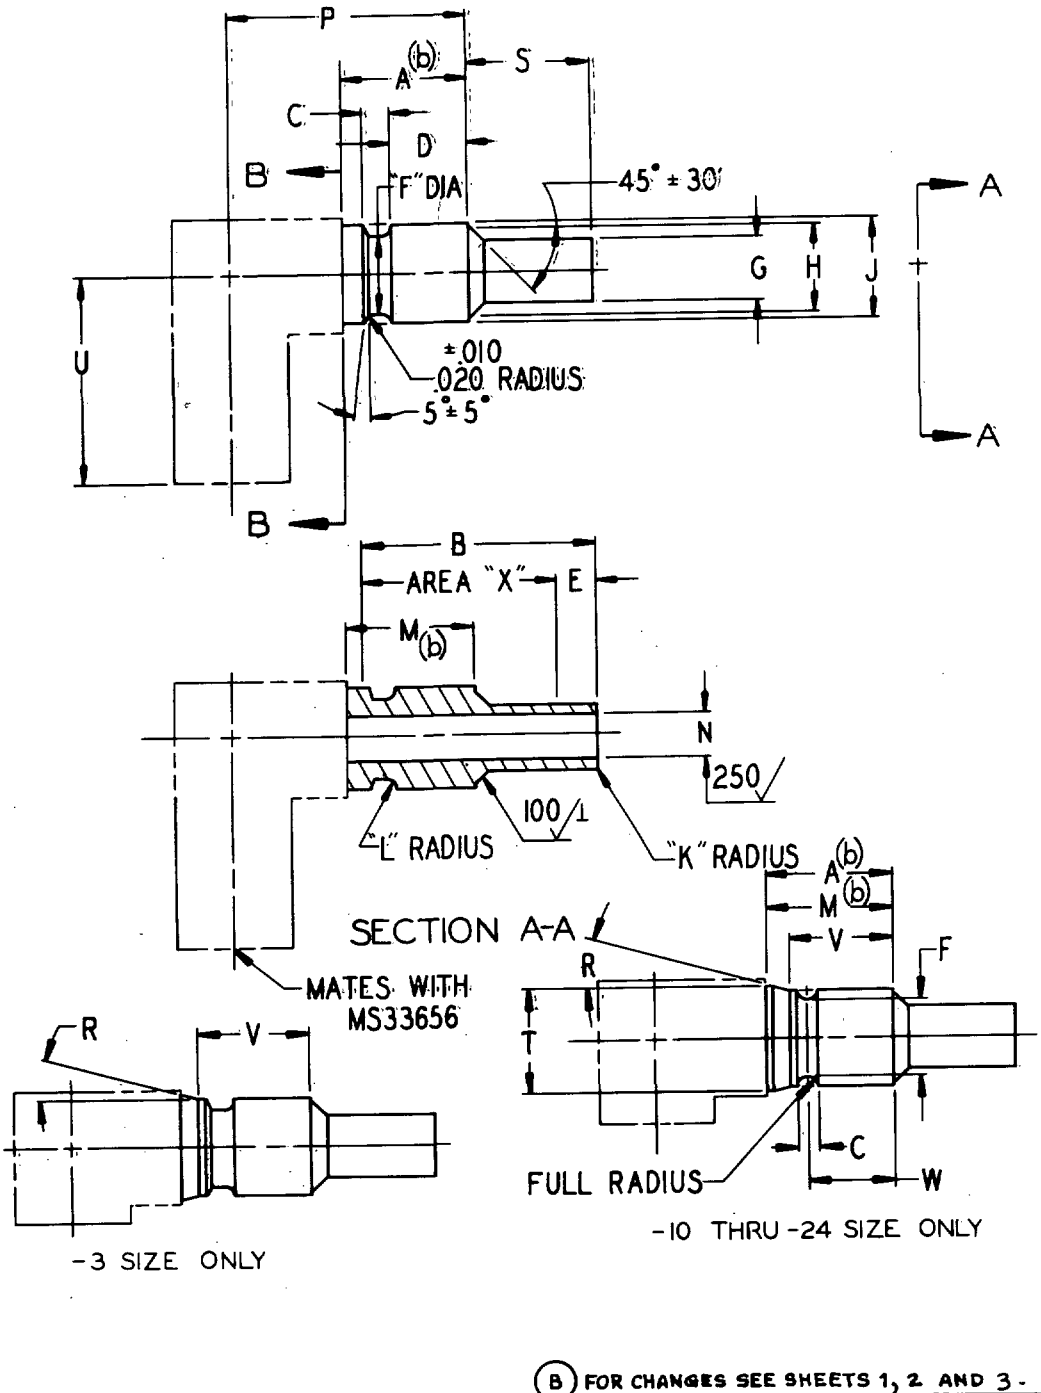

(B) FOR CHANGES SEE SHEETS 1, 2 AND 3.

APPROVED 1 Sep 61 REVISED (A) 2 May 66 (B) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force-11 (B) Other Cust Army-AV Navy-AS	TITLE ELBOW, NIPPLE END, FLARED, (B) TUBE TO HOSE-90° SWIVEL NUT	MILITARY STANDARD MS27086
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
4730

	DASH STEEL	DASH ALUM	"A" MIN	B MIN	C		D +.005 −.000	E		F		G +.005 −.000
(B)	-3/-4C	——	.515	.870	.106	±.010	.307	.25	±.05	.288	+.005 −.000	.205
	-4C	——										
	-5C	——	.520	.890	.116		.322			.316		.268
	-6C	——	.555							.391		.330
	-8C	-8D	.630	1.030	.140	±.020	.335	.32	±.12	.497		.426
	-10C	-10D	.654	1.130	.098	+.004 −.000	——	.35	±.15	.586		.526
	-12C	-12D	.755	1.240	.128	+.005 −.000	——			.674		.650
	-16C	-16D	.831	1.340			——	.39	±.19	1.001	+.008 −.000	.900
	-20C	-20D	.881	1.570			——	.48	±.28	1.255	+.005 −.000	1.151
	-24C	-24D	1.035	1.720			——	.50	±.30	1.490		1.401
(a)	-3C	——	.475	.680	.106	±.010	.287	.18	±.05	.471		.135

H ±.005	J +.005 −.000	K		L ±.004	"M" MIN	N STEEL	N ALUM		P		"R" MAX
.295	.373	.015	+.005 −.000	.036	.485	.161	——	+.005 −.000	.845	±.020	——
.360	.416			.040	.501	.224	——		.900		——
.425	.491				.521	.261	——		.965		——
.530	.616	.020		.047	.583	.345	.345	+.006 −.000	1.235		——
.625	.706		±.005	——	.620	.440	.440		1.315	±.035	——
.760	.826	.030		——	.720	.560	.560		1.808		15° 30'
1.040	1.150			——	.796	.828	.828		1.901		10° 30'
1.275	1.405			——	.846	1.058	1.058		2.180		15° 30'
1.550	1.635	.035		——	1.000	1.253	1.282	±.005 −.000	2.500		
.225	.256	.010	±.004 −.000	.036	.453	.090	——	±.006 −.000	.795	±.020	

S		"T" MAX	U		V		"W" +.005 −.000 STEEL	"W" +.005 −.000 ALUM
.480	±.010	——	.530	±.020	——	——	——	——
		——	.580		——	——	——	——
		——	.655		——	——	——	——
		——	.720		——	——	——	——
.600		——	.830		——	——	——	——
.650	±.015	——	1.126	±.035	——	——	.420	.427
.675	±.025	.900	1.376		.625	±.010	.500	.500
.730		1.190	1.500		.670		.545	.545
.935		1.485	1.782		.695		.565	.571
.980		1.750	2.032		.795		.665	.665
.320	±.010	——	.530	±.020	.425	±.005	——	——

APPROVED 1 Sep 61 REVISED (B) FOR CHARGES SEE SHEETS 1, 2 AND 3

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

User Activities:
Army - WC, ME, MI

Review Activities:
Army - AV
Navy - AS
Air Force - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

PA	TITLE	MILITARY STANDARD
Air Force - 11 (B)	(B) ELBOW, NIPPLE END, FLARED, TUBE TO HOSE - 90° SWIVEL NUT	MS27086
Other Cust: Army - AV, Navy - AS		
Procurement Specification: MIL-F-27272	SUPERSEDES	SHEET 2 OF 3

DD FORM SEP 61 672 Coordinated [illegible] DATE

DRAWN BY

Source: https://assist.dla.mil -- Downloaded: 2026-10-25 13:16Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL : CORROSION RESISTING STEEL : CLASS 304 OR 321 COLD FIN.
CONDITION "A" SPECIFICATION QQ-S-763.
ALUMINUM ALLOY : 6061-T6 OR T651
SPECIFICATION QQ-A-367 OR QQ-A-225/8

FINISH : CORROSION RESISTING STEEL : PASSIVATE PER MIL-F-27272.
ALUMINUM ALLOY : ANODIZE, SPECIFICATION.
MIL-A-8625, TYPE II, DYE BLUE.

DRY-FILM LUBRICATE AREA "X" IN ACCORDANCE WITH MIL-L-8937. NO OVERSPRAY ALLOWED.

(B) DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED : RADIUS OR BREAK ALL CORNERS .005 + .005 -.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1-1962 NOT TO EXCEED 125 AA. ALL DIAMETERS WITHIN LENGTH "A" PLUS "S" MUST BE CONCENTRIC WITHIN .005 TIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES, THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSEMBLIES.

(a) MS27086-3C INACTIVE FOR DESIGN AFTER 2 MAY 1966. USE ONLY IN ASSEMBLIES FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT.

(b) USE "A" DIM. WHEN THE ADJACENT DIA TO THE LEFT OF PLANE B-B IS GREATER THAN "J" DIM. WHEN THE ADJACENT DIA IS EQUAL TO OR LESS THAN "J" DIM. "M" DIM. MAY BE USED IN PLACE OF "A" DIM.

THE BORE OF THE ELBOW, -10 THRU -24 SIZE, SHALL NOT BE LESS THAN THE ID OF THE NIPPLE. OVALITY SHALL NOT EXCEED 7.5 PERCENT OF NOMINAL TUBING OD.

ANY DESIGN OF THE ELBOW TO THE LEFT OF PLANE B-B IS ACCEPTABLE PROVIDED DIM'S "P" AND "U", THE MATERIALS SPECIFIED AND THE FABRICATION NOTES OF THIS STANDARD ARE MET.

ANY FORGED DESIGN IS ACCEPTABLE FOR -3 THRU -8 SIZE. ANY BENT TUBE DESIGN IS ACCEPTABLE FOR -10 THRU -24 SIZE.

NEXT ASSEMBLY MS27068-3 THRU -8 SIZE
AND MS27065-10 THRU -24 SIZE.

APPROVED 1 Sep 61 REVISED (B) FOR CHANGES SEE SHEETS 1, 2 AND 3

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

P.A. Air Force-11 Other Cust Army-AV, Navy-AS (B)	TITLE (B) ELBOW, NIPPLE END, FLARED, TUBE TO HOSE-90° SWIVEL NUT	MILITARY STANDARD MS27086
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.