This military standard has been approved by the Department of the Air Force and is for use by that activity. All other military activities are required to employ this standard where suitable.


DD FORM 1 SEP 63 672

(LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification MIL-C-38999	P.A. AF-85
	Other Cust
	International Interest
SUPERSEDES:	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II.
SHEET 1 OF 1	MILITARY STANDARD MS27504 (USAF)

5935-F966-35

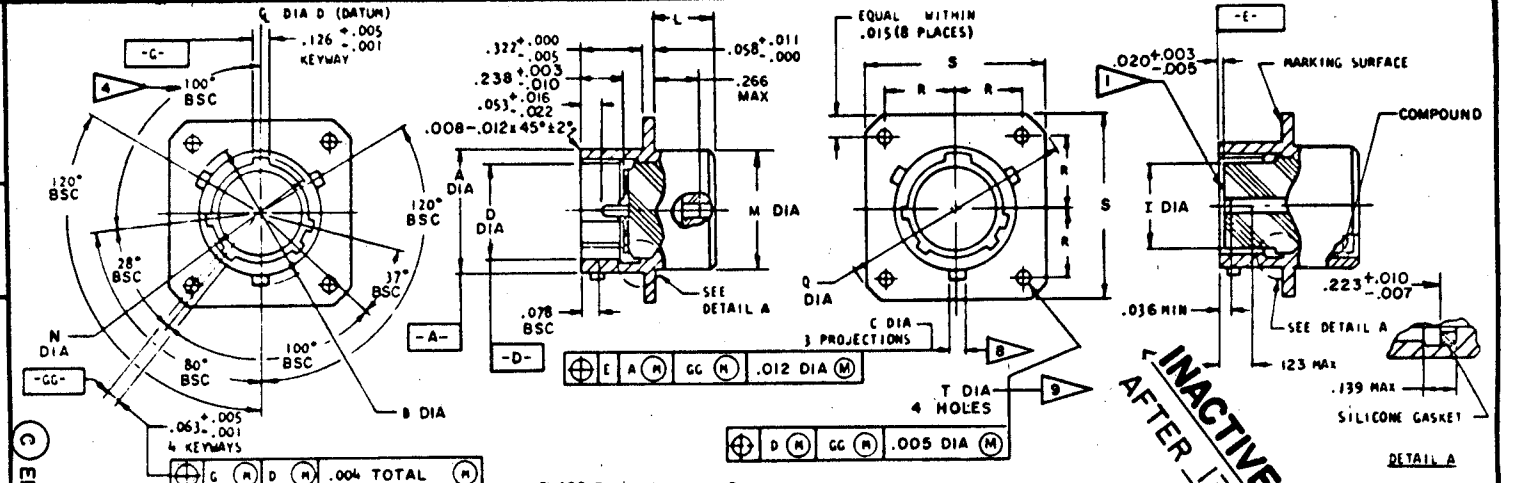

INACTIVE FOR NEW DESIGN AFTER 13 AUG 74 USE MS27499

CLASS E FINISH C

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	I MAX DIA (B)	L MAX	M MAX	N +.005 -.006 DIA	Q MAX	R BSC	S MAX	T +.010 -.005	CC	FOR INSER. ARR. SEE DWG MS
8	.473	.563	.078	.362	.290	.312	.453	.412	1.078	.297	.828	.120	.004	27343, 27516
10	.590	.680		.490	.418		.578	.540	1.266	.3595	.954		.010	27344, 27517
12	.750	.859		.607	.532		.703	.689	1.391	.406	1.047			27345, 27518
14	.875	.984		.732	.657		.828	.814	1.516	.453	1.141			27346, 27519
16	1.000	1.108		.857	.782		.953	.939	1.641	.4845	1.234			27347, 27520
18	1.125	1.233		.962	.871		1.062	1.039	1.766	.531	1.328			27348, 27521
20	1.250	1.358	.125	1.087	.996		1.188	1.164	1.891	.578	1.453			27349, 27522
22	1.375	1.483		1.212	1.121		1.312	1.289	2.016	.625	1.578			27350, 27523
24	1.500	1.610		1.337	1.246		1.438	1.414	2.204	.6875	1.703	.147		27351, 27524

(C) ENTIRE STANDARD REVISED

NOTES:

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 T.I.R.
3. DIMENSIONS IN INCHES.
4. THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS, SEE FIGURE 6 OF PROCUREMENT DOCUMENT.
5. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R.
6. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
7. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T.I.R. AT MMC.
8. THE GAGE FEATURES FOR GG SHALL BE .CC SMALLER THAN THEIR MMC AT BASIC LOCATION.
9. THE GAGE FEATURES FOR GG SHALL BE .010 SMALLER THAN THEIR MMC AT BASIC LOCATION.

EXAMPLE OF PART NUMBER

MS 27504 E 24 C 61 P A

MS NO.	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR. NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

FED. SUP CLASS 5935

APPROVED 8 MAR 68 REVISED (C) 13 AUG 74

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:42Z
Check the source to verify that this is the current version before use.