INCH-POUND
MS27505G
w/AMENDMENT 2
29 October 2024
SUPERSEDING
MS27505G
w/AMENDMENT 1
8 February 2008

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, BACK PANEL, BOX MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

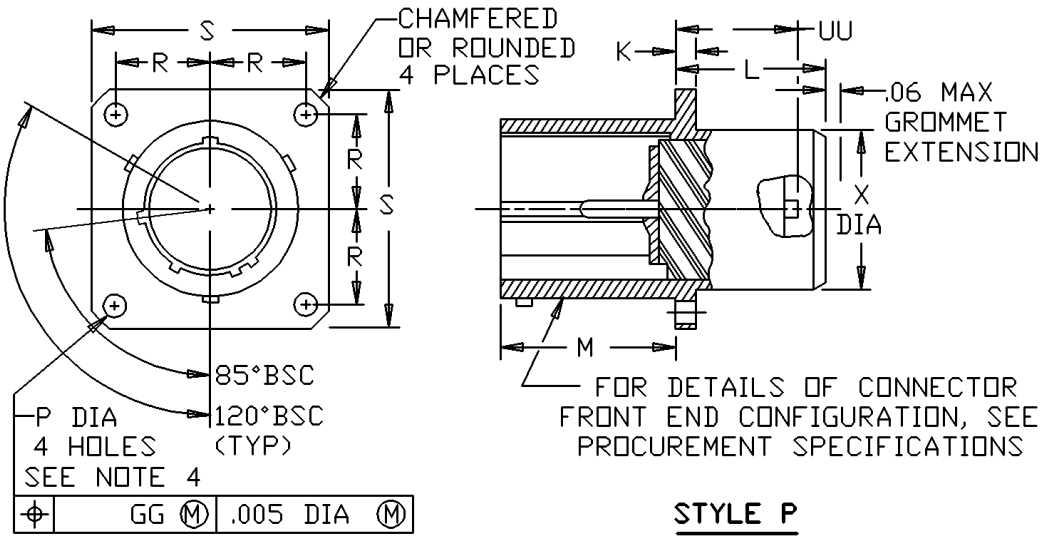


FIGURE 1. Receptacle, class E.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

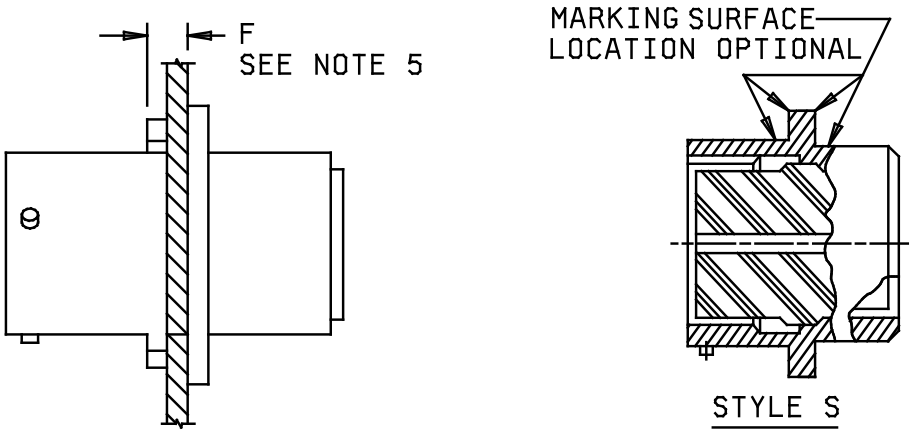


FIGURE 1. Receptacle, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Shell size	K +.015 -.000	L max	M +.000 -.005	P dia +.010 -.005	R BSC	S ± .020	UU max	X max dia	F max
9	.085	.219	.820	.128	.3595	.938	.156	.547	.234
11					.406	1.031		.656	
13					.453	1.125		.828	
15					.4845	1.219		.953	
17					.531	1.312		1.078	
19					.578	1.438		1.203	
21	.115	.250	.790	.147	.625	1.562	.188	1.328	.204
23					.6875	1.688		1.453	
25					.750	1.812		1.578	.193

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.147	3.73	.406	10.31	.750	19.05	1.219	30.96
.007	0.18	.156	3.96	.453	11.51	.790	20.07	1.312	33.32
.010	0.25	.193	4.90	.4845	12.31	.820	20.83	1.328	33.73
.015	0.38	.204	5.18	.531	13.49	.828	21.03	1.438	36.53
.020	0.51	.207	5.26	.547	13.89	.938	23.83	1.453	36.91
.031	0.79	.219	5.56	.560	14.22	.953	24.21	1.562	39.67
.06	1.5	.234	5.94	.578	14.68	1.031	26.19	1.578	40.08
.085	2.16	.250	6.35	.625	15.88	1.078	26.38	1.688	42.88
.115	2.92	.328	8.33	.656	16.66	1.125	27.58	1.812	46.02
.128	3.25	.3595	9.13	.6875	17.46	1.203	30.56		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. The gauge features for GG shall be .010 (0.25 mm) smaller than the MMC size at basic location.
5. Maximum panel thickness including mounting hardware.


FIGURE 1. Receptacle, classes E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27467, MS27653, SAE-AS85049/45, and SAE-AS85049/46.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

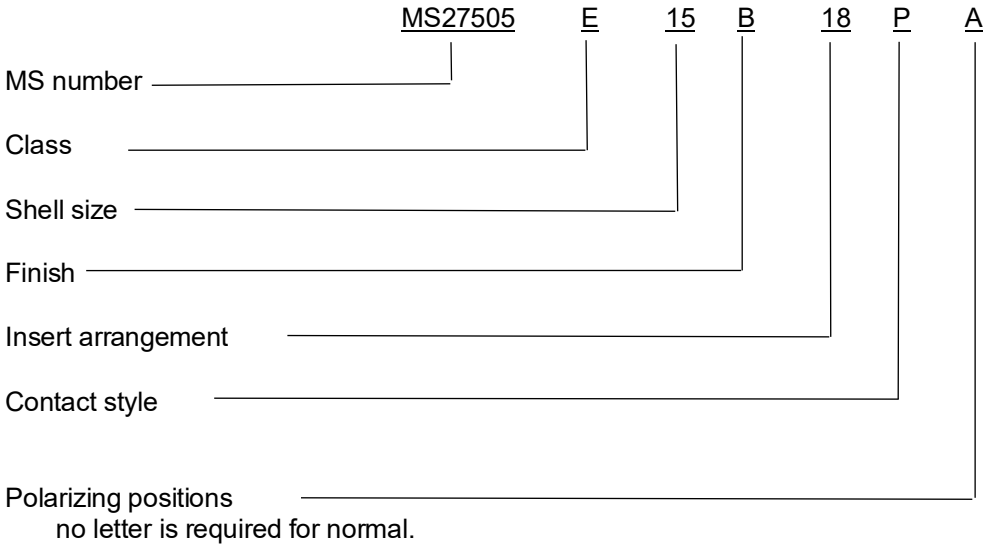

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MS27467
MS27653
MIL-STD-1560
SAE-AS85049/45
SAE-AS85049/46

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2024-174)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.