FED. SUP CLASS
4730

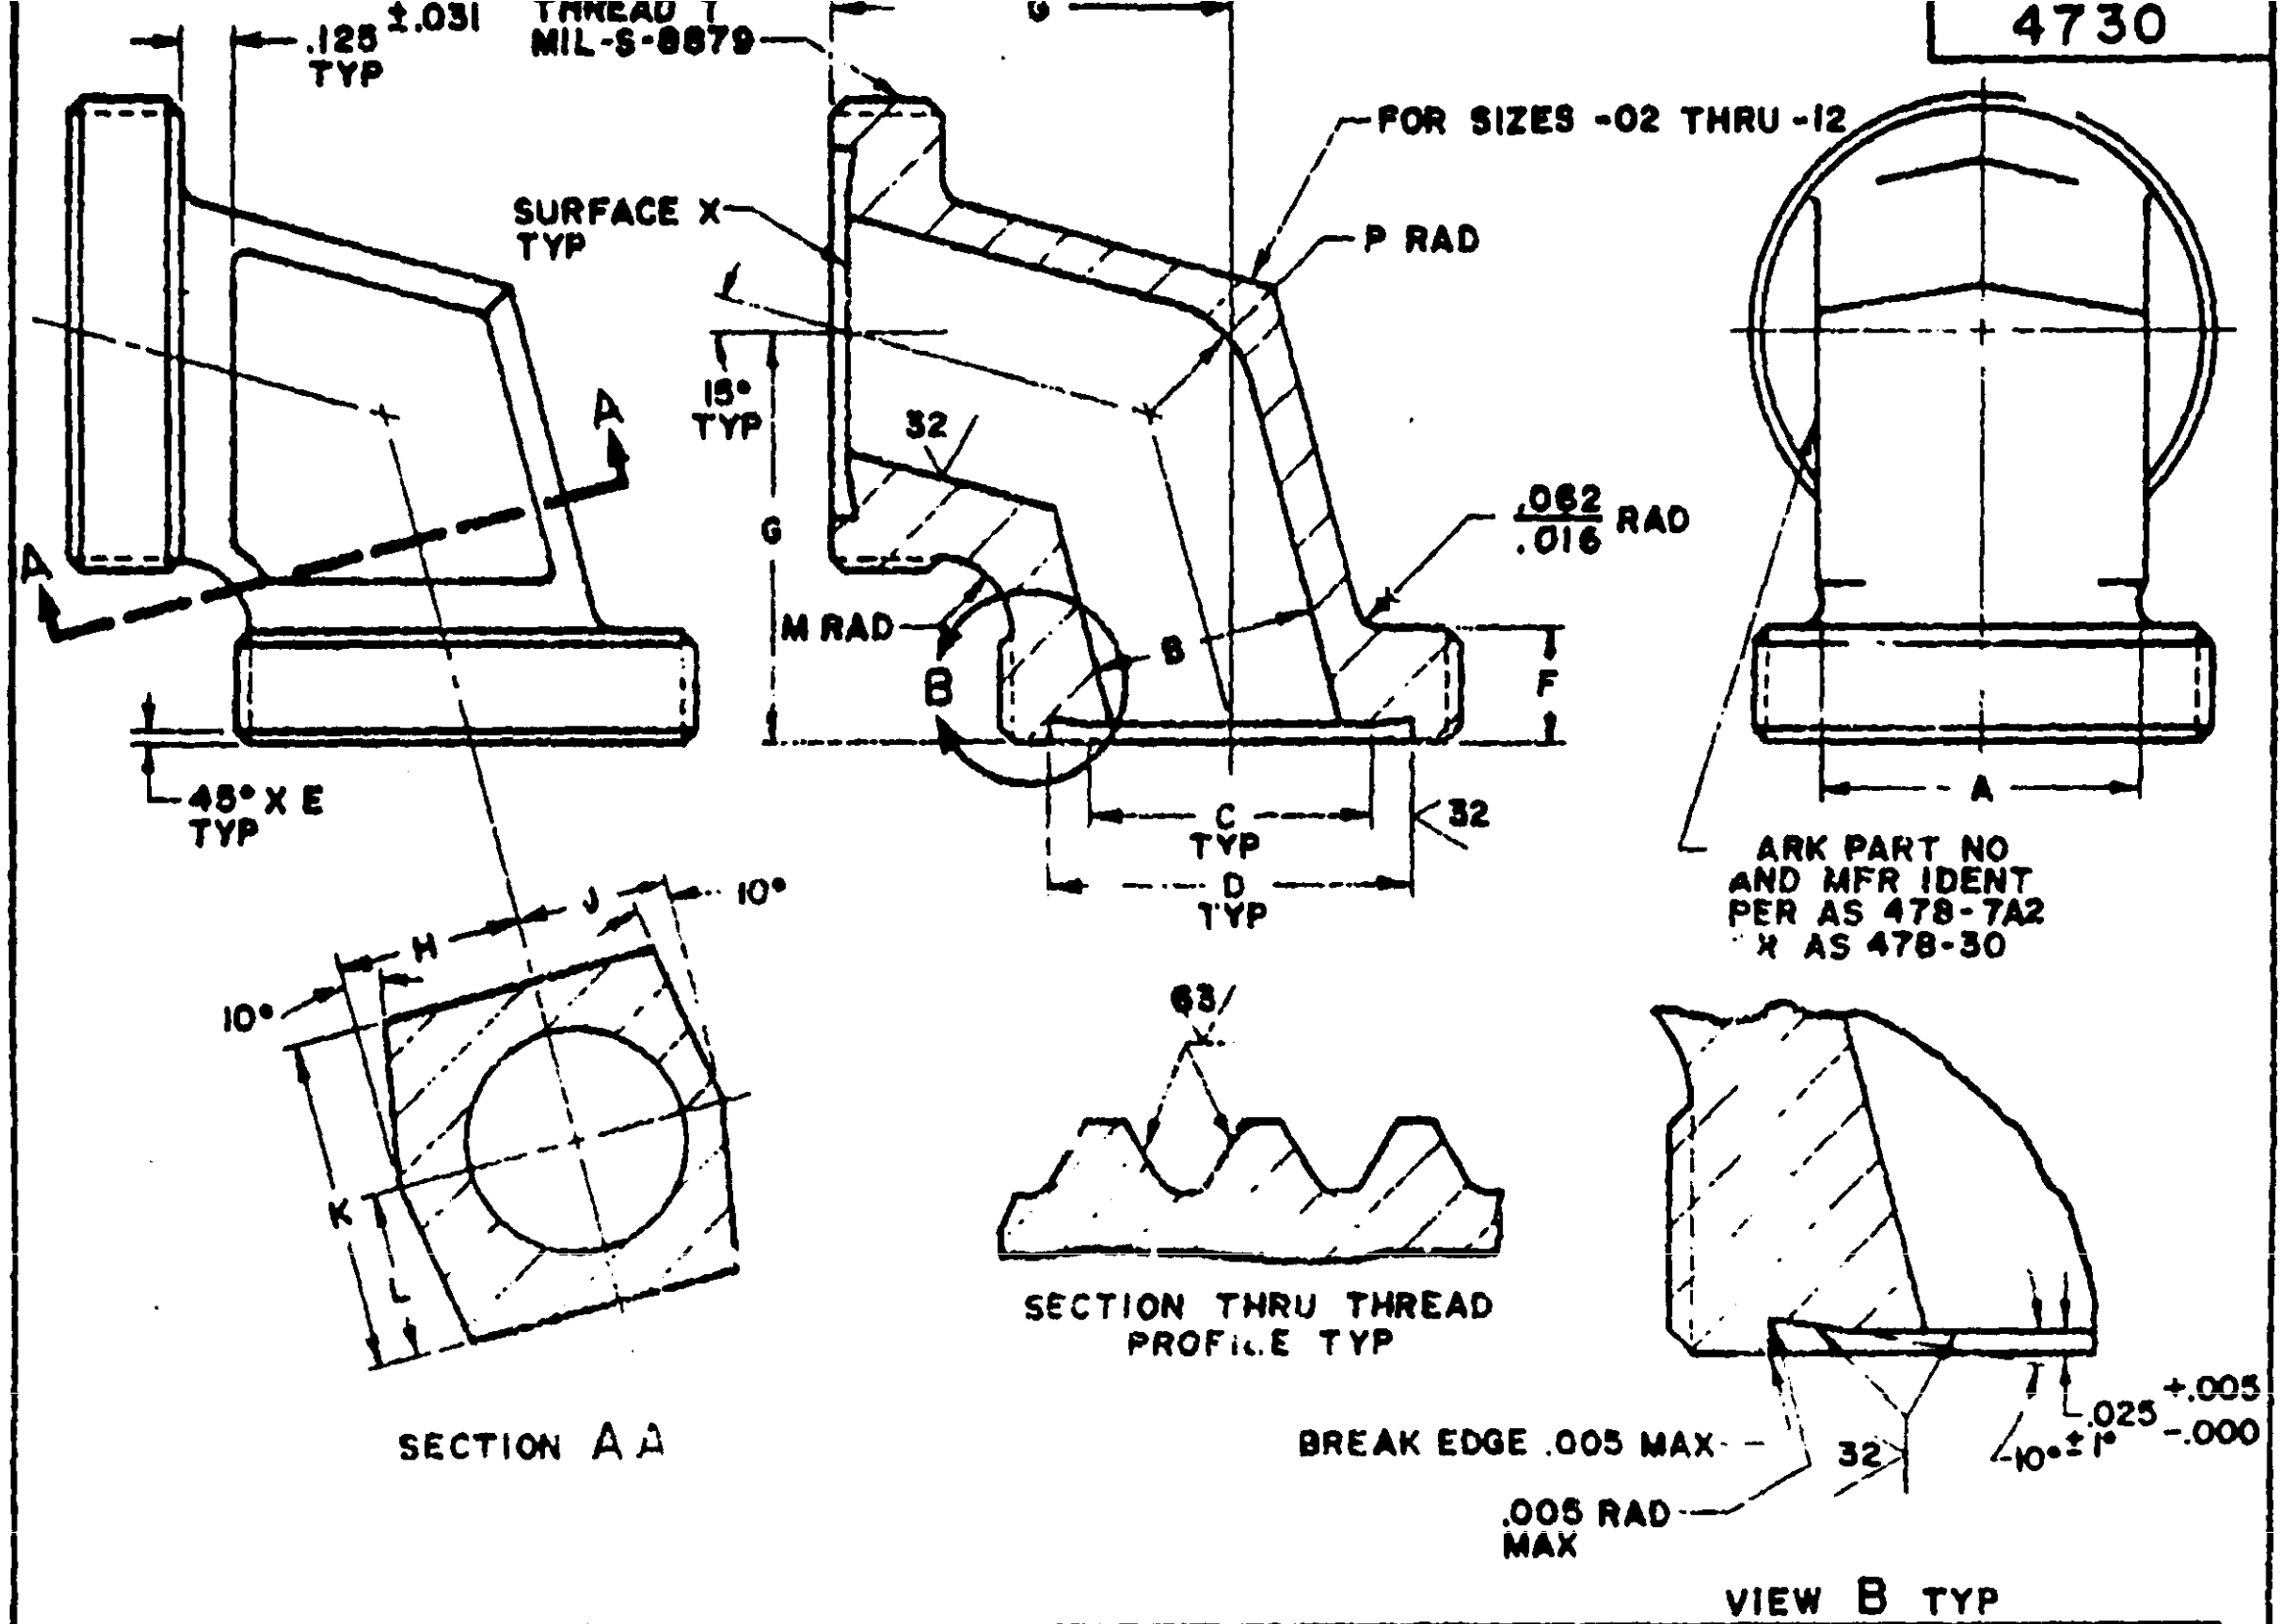

MS PART NO.	TUBE O.D.	THREAD T UNJEF-3A	A DIA +.031 -.000	B DIA ±.002	C DIA +.000 -.010	D DIA +.002 -.000	E	F +.031 -.000	G +.010 -.000	H +.015 -.000	J +.015 -.000	K +.002 -.006	L	M +.010 -.000	P	APPROX WEIGHT LB/EA
MS27866-02	1/8	9/16-24	.258	.081	.156	.350	.030	.208	.603	.130	.129	.312	.156	.155	.040	
MS27866-04	1/4	5/8-24	.336	.175	.260	.452	.030	.208	.634	.168	.168	.375	.188	.168	.088	.044
MS27866-06	3/8	3/4-20	.430	.270	.372	.564	.035	.250	.755	.215	.215	.437	.218	.207	.135	.070
MS27866-08	1/2	7/8-20	.576	.362	.470	.666	.035	.250	.816	.305	.271	.625	.312	.210	.181	.107
MS27866-12	3/4	1-1/8-12	.798	.548	.604	.888	.040	.278	.981	.424	.374	.812	.406	.240	.274	.204
MS27866-16	1	1-5/16-12	1.060	.730	.904	1.100	.040	.278	1.075	.535	.505	1.125	.562	.175	.366	.388

1. THREAD PD SHALL BE SQUARE TO SURFACE X WITHIN .005 FIR AND CONCENTRIC WITH DIA D WITHIN .005 FIR.
2. MATERIAL: CORROSION-RESISTANT STEEL, AMS 5646.
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417.
4. SURFACE TEXTURE: IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED ALL MACHINED SURFACES TO BE 63 MICROINCHES.
5. BREAK EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.
8. REFER TO MS27851 FOR ASSEMBLY.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Review activities: 11, 14, 19, 69, 85, & NAS

APPROVED 14 JULY 1967 REVISED

P.A. USAF 11 Other Cust	TITLE ELBOW, 90°, CRES, FLUID CONNECTION FITTING, HIGH PRESSURE	MILITARY STANDARD MS27866 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 61 672-1 (limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

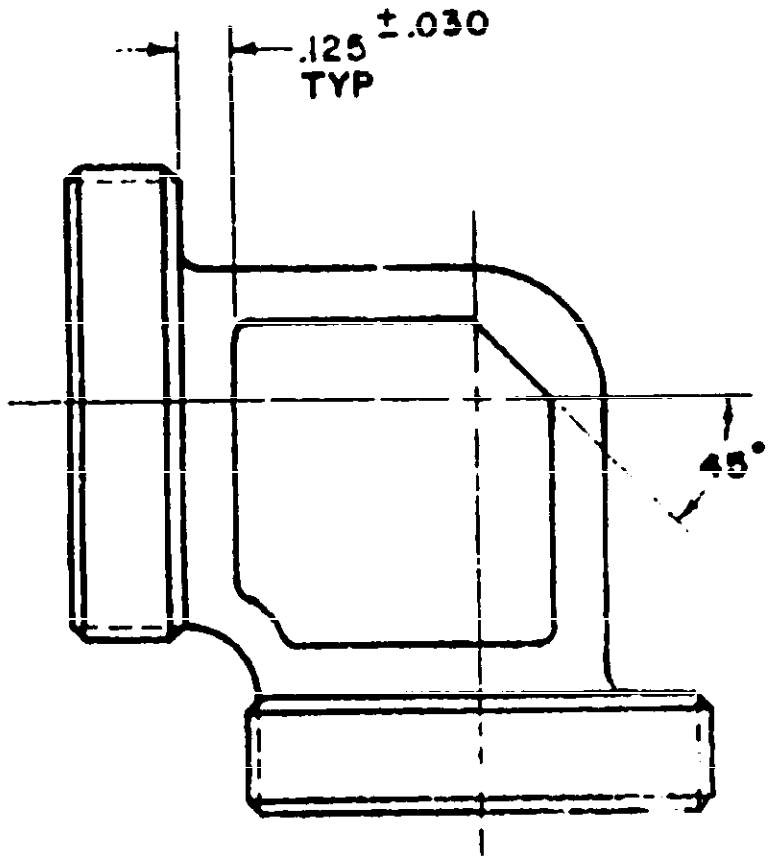

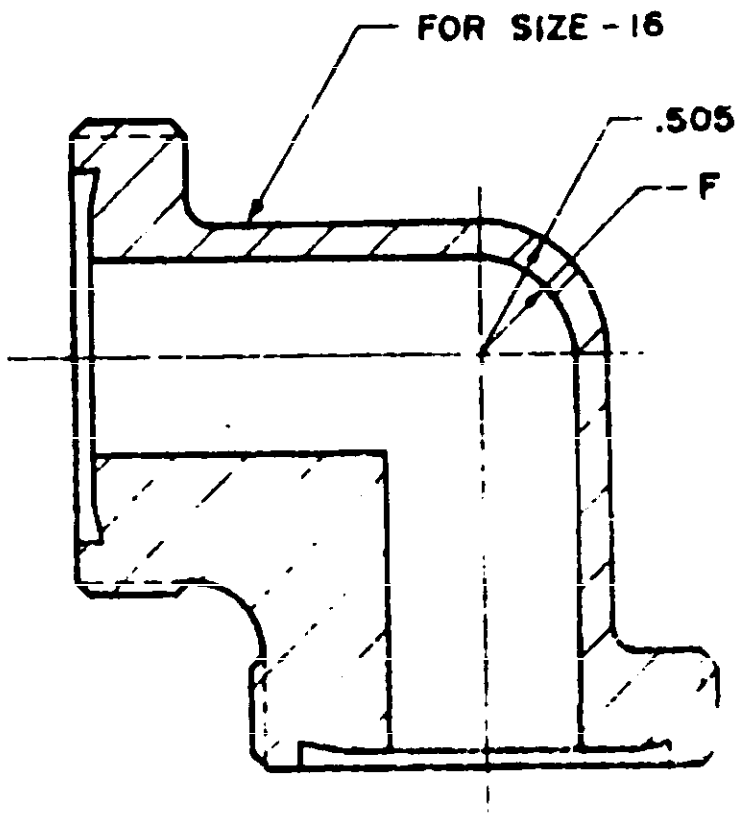

*Review activities: 11, 14, 19, 69, 85, & NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where applicable.

P.A. USAF 12 Other Cust	TITLE ELBOW, 90°, CRES, FLUID CONNECTION FITTING, HIGH PRESSURE	MILITARY STANDARD MS27866 USAF
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:53Z
Check the source to verify that this is the current version before use.