DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

REVIEWER ACTIVITIES: ARMY - AV
NAVY - OLA, CS
AIR FORCE - 85

USER ACTIVITIES:

P.A. USAF - 82
Other Cust
AF - 99
ARMY - ME
NAVY - AS

INTERNATIONAL INTEREST

PROCUREMENT SPECIFICATION MIL-F-18287 (Aer)

SUPERSEDES

TITLE

FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 45°

MILITARY STANDARD

MS 28754


SHEET 1 OF 2

FED. SUP CLASS 4730

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(B) REINSTATED 24 JAN 86

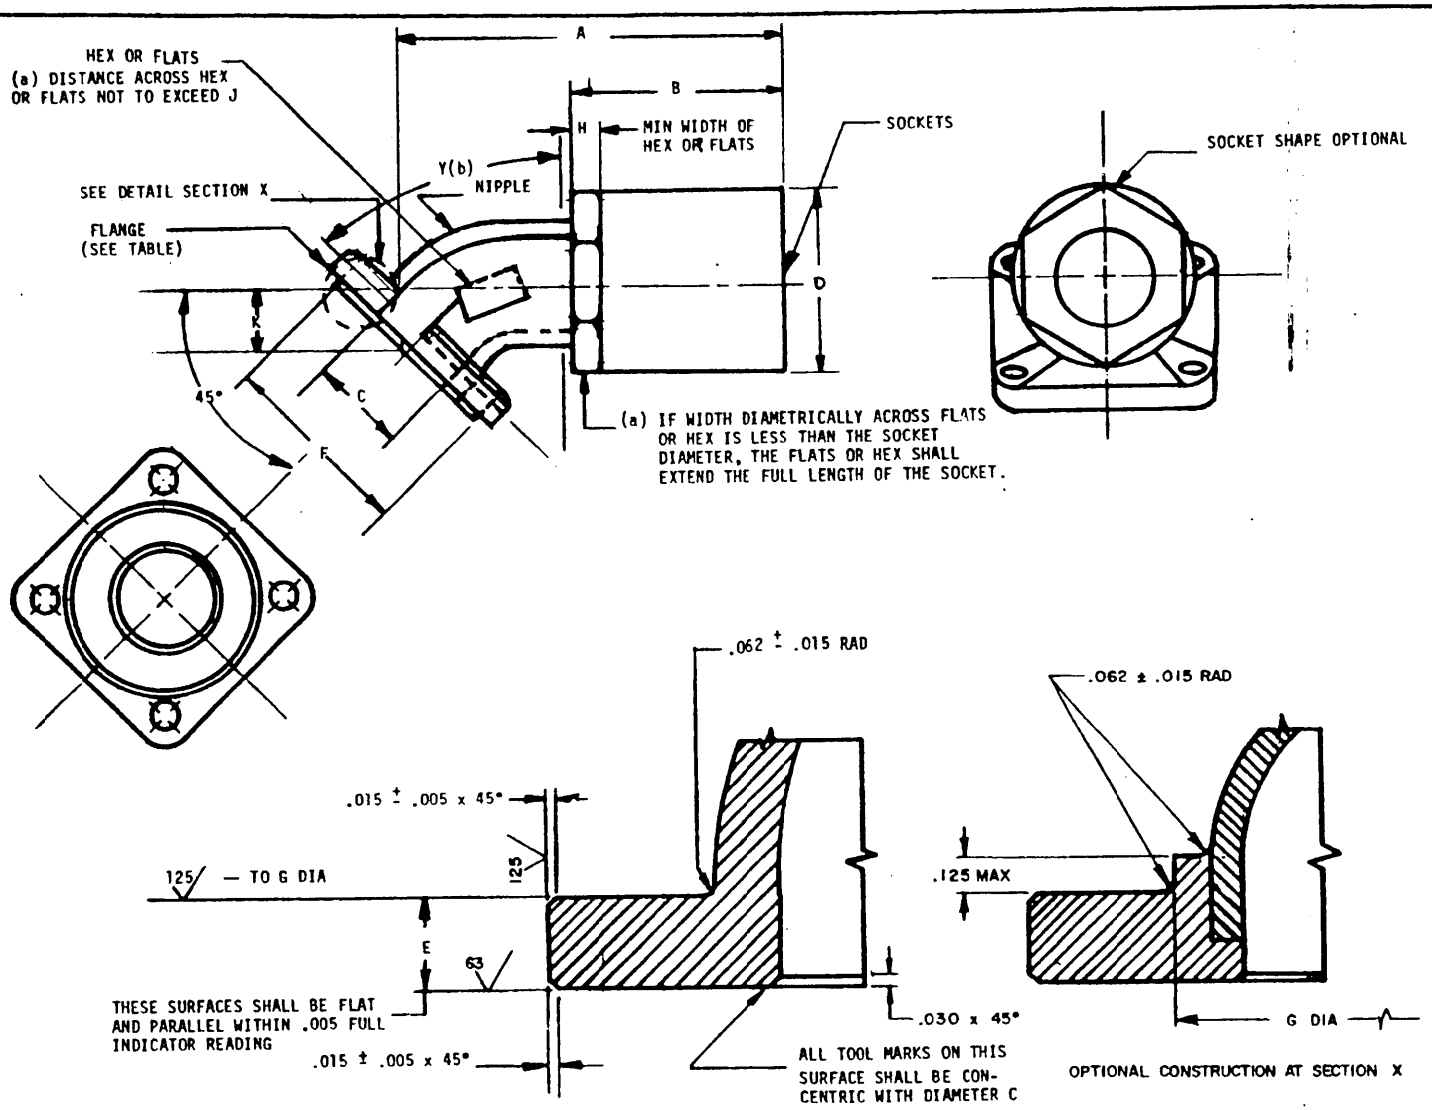

APPROVED 2 DEC 1954 REVISED A 16 APR 82 (B) 24 Jan 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MS PART NO.	NOMINAL TUBING AND HOSE SIZE REF	FLANGE AN PART NO.	A MAX	B MAX	(c)C MIN DIA	D MAX	E +.000 -.005	(c)F +.000 -.005 DIA	(c)G MAX DIA	H MIN	J MIN	K MAX	WEIGHT LB APPROX
MS28754D16	1	MS20756D16	3.672	2.000	.813	1.953	.156	1.500	1.188	.375	1.343	.656	.735
MS28754D20	1 1/4	MS20756D20	3.797	2.000	1.047	2.313	.156	1.844	1.500	.500	1.656	.656	.830
MS28754D24	1 1/2	MS20756D24	4.219	2.000	1.281	2.563	.188	2.125	1.750	.500	1.906	.813	.840
MS28754D32	2	MS20756D32	4.875	2.250	1.750	3.125	.188	2.750	2.375	.625	2.531	.953	1.064
MS28754D40	2 1/2	MS20756D40	5.438	2.500	2.203	3.625	.188	3.281	2.875	1.000	3.031	1.031	1.300
MS28754D48	3	MS20756D48	5.969	2.500	2.828	4.438	.188	3.781	3.375	1.250	2.250	1.391	1.650

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.

(b) THE TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE Y, HOWEVER A BALL .031 SMALLER IN DIAMETER THAN C MUST PASS THROUGH. NIPPLE ID WITHIN ANGLE Y SHALL NOT EXCEED C DIAMETER.

(B) (c) DIAMETERS F, G AND C SHALL BE CONCENTRIC WITHIN .010 FULL INDICATOR READING.

(B) (d) HEX FLANGE MS20756 NOT SHOWN.

(B) MATERIAL: ALUMINUM ALLOY
FOR SURFACE ROUGHNESS, SEE ANSI B46.7-78.

THE INTERIOR SURFACE OF THE FITTING SHALL BE SMOOTH AND FREE FROM PROJECTIONS.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1°.
FITTINGS SHALL BE PERMANENTLY MARKED WITH THE MS PART NUMBER ON AN UNFINISHED SURFACE OF THE NIPPLE
FITTINGS MUST SWIVEL THRU 360° WITH SUFFICIENT CLEARANCE TO ALLOW USE OF STANDARD WRENCHES ON THE NUT WHEN THE AXIS OF THE HOSE IS ALIGNED OVER THE STUD OR CAPSCREW.

THE AIRPLANE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE.

USER ACTIVITIES:
ARMY - AV
NAVY - DLA CS
AIR FORCE - 85

REVIEWER ACTIVITIES:

APPROVED 2 DEC 1954 REVISED FOR CHANGES SEE PAGES 1&2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AF - 82 Other Cust AF - 99 ARMY - ME NAVY - AS		FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 45°	MS 28754
PROCUREMENT SPECIFICATION	SUPERSEDES		SHEET 2 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITION OBSOLETE AND MAY NOT BE USED

Source: https://assist.dla.mil - Downloaded: 2025-07-23T16:58Z
Check the source to verify that this is the current version before use.