
Project No. 4730-0273

FED. SUP CLASS 4730

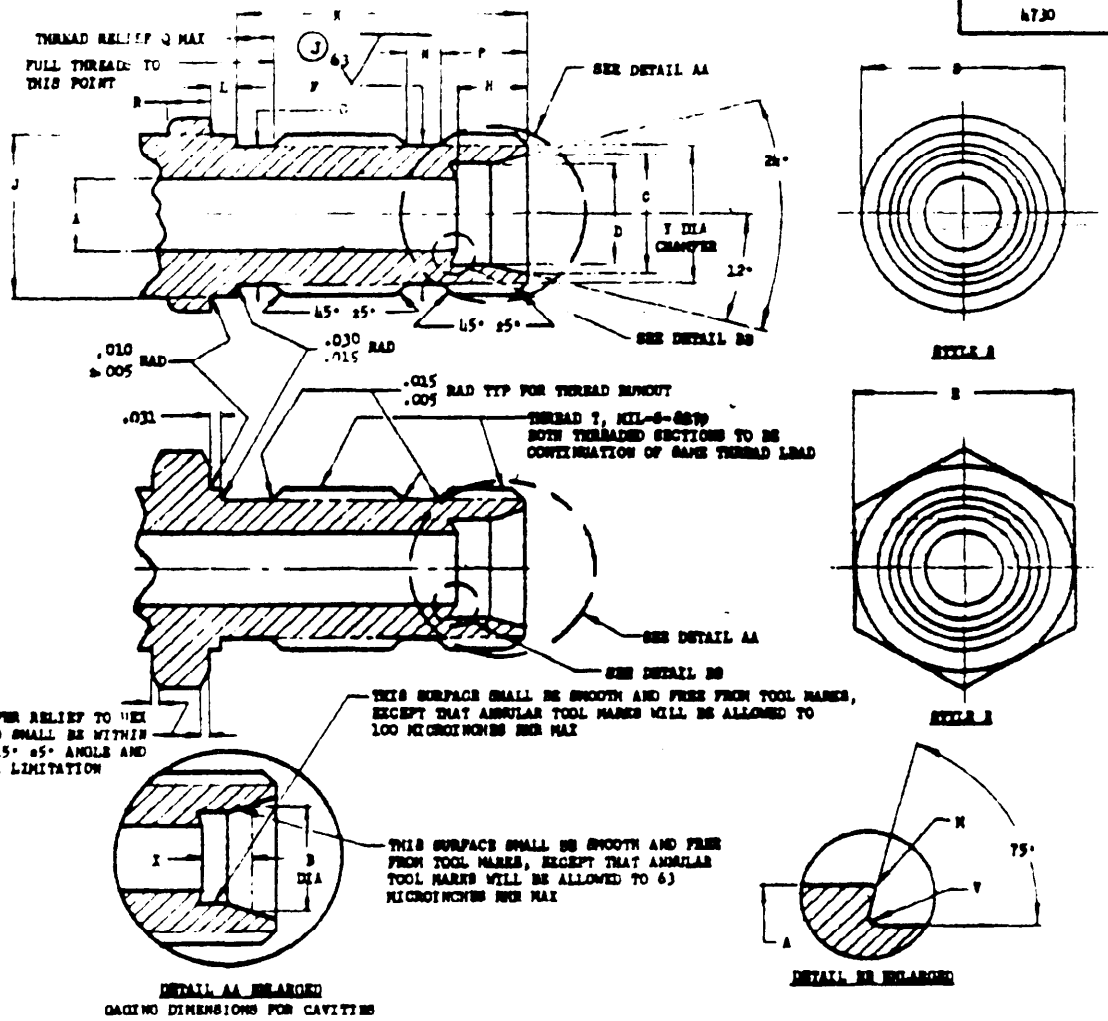

CAVITY DIMENSIONS

1. CONCENTRICITY: D, C, AND T (PITCH DIA) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .008 TOTAL INDICATOR READING. F AND T (PITCH DIA) SHALL BE CONCENTRIC TO EACH OTHER WITHIN .005 TOTAL INDICATOR READING.
2. THREAD AND FACE OF HEX SHALL BE SQUARE WITHIN W WHEN MEASURED AT DIAMETER E.
3. REMOVE ALL BURRS, SLIVERS AND SHARP EDGES.
4. SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1 - 1962.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±1/2°.
6. ON STYLE B FITTING END, THE L DIMENSION PROVIDES FOR A WASHER TO FORM BACKING FACE AGAINST BULKHEAD, AND A .031 INCH LAND FOR POSITIONING IN BULKHEAD. ON STYLE E FITTING END NO WASHER IS REQUIRED.
7. EXAMPLE OF DESIGN IDENTIFICATION NUMBER: MS3315[6]8
   - 6 = SIZE OF FITTING END IN 16 THS
   - 8 = STYLE E
   - 5 = STYLE 6
   - BASIC DESIGN NUMBER

* CERTAIN PROVISIONS (SCREW THREADS, HEXAGON SIZE AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT AGREE AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

(J) FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 4 Oct 72 REVISED (J) 23 JAN 73

P.A. NAVY - AS Other Cust USAF - 02 Army-AV	INTERNATIONAL INTEREST *	TITLE: FITTING END, STANDARD DIMENSIONS FOR BULKHEAD PLANELESS TUBE CONNECTIONS	MILITARY STANDARD MS33515
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF 2

DD FORM 1,672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.

FSC 4730

TABLE I - DIMENSIONS

SIZE NO.	TUBE OD	THREAD F MIL-S-8879	A ±.003	B ±.0001 GAGE	C REF	D +.006 -.000	E		F (a) +.000 -.003	G +.000 -.005	H ±.003	J MAX	J MIN
2	1/8	.3125-24 UNEF-3A	.091	.1630	.189	.135	.563		.259	.245	.188	.3125	.3053
3	3/16	.3750-24 UNEF-3A	.125	.2340	.267	.196	.625		.313	.307	.234	.3750	.3678
4	1/4	.4375-20 UNEF-3A	.187	.2730	.319	.261	.688		.364	.359	.234	.4375	.4294
5	5/16	.5000-20 UNEF-3A	.234	.3560	.387	.324	.750	±.003 -.004	.426	.421	.250	.5000	.4919
6	3/8	.5625-18 UNEF-3A	.297	.4160	.441	.386	.813		.481	.476	.250	.5625	.5538
8	1/2	.7500-16 UNEF-3A	.422	.5400	.603	.534	1.000		.660	.654	.305	.7500	.7406
10	5/8	.8750-14 UNEF-3A	.500	.6660	.727	.664	1.125		.772	.767	.320	.8750	.8657
12	3/4	1.0625-12 UNF -3A	.656	.8100	.952	.788	1.375		.945	.938	.350	1.0625	1.0513
16	1	1.3125-12 UNF -3A	.875	1.0820	1.102	1.014	1.625	±.016	1.195	1.188	.415	1.3125	1.3011
20	1-1/4	1.6250-12 UNJ -3A	1.093	1.3160	1.355	1.270	1.875		1.507	1.501	.415	1.6250	1.6136
24	1-1/2	1.8750-12 UNJ -3A	1.344	1.5690	1.604	1.520	2.125	±.020	1.756	1.750	.485	1.8750	1.8636
32	2	2.5000-12 UNJ -3A	1.813	2.0660	2.108	2.022	2.750		2.381	2.375	.485	2.500	2.4886

(a) GROOVE FORMED SHALL BE SMOOTH AND FREE OF ALL THREAD MARKS. TOLERANCE ON DIMENSION F MAY BE +.006, -.003 PROVIDED NO THREAD MARKS ARE PRESENT.

TABLE I - DIMENSIONS (CONTINUED)

SIZE NO.	TUBE OD	K	L	N MAX RAD	M +.010 -.000	P ±.005	Q MAX	R ±.03	S ±.031 DIA	T RAD MAX	T RAD MIN	W MAX	X ±.005	Y ±.010
2	1/8	.828	.094	.005	.125	.270	.078	.11	.438	.010	.005	.005	.188	.850
3	3/16	.875			.131	.340			.500	.015	.010		.158	.910
4	1/4	.938			.160	.355	.080	.12	.563				.171	.965
5	5/16			.010					.625				.190	1.025
6	3/8	.984			.156	.365	.098	.14	.688				.193	1.090
8	1/2	1.125	.125		.187	.445	.109	.16	.875				.210	1.260
10	5/8	1.266			.219	.495	.122	.17	1.000				.255	1.775
12	3/4	1.375			.834	.545	.140	.19	1.187			.008	.253	1.945
16	1								1.438				.322	1.195
20	1-1/4			.015					1.750				.325	1.505
24	1-1/2								2.000	.025	.020		.190	1.755
32	2	1.578							2.625				.395	2.380

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-714-542/3901

Preparing Activity: NAVY - AS; Other Cust: USAF - 82; Army-AV	INTERNATIONAL INTEREST: *	TITLE: FITTING END, STANDARD DIMENSIONS FOR SELECTED FLARELESS TUBE CONNECTIONS	MILITARY STANDARD MS33515
PRELIMINARY SPECIFICATION: None	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1426, MAR 72 - 372-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVISED J FOR CHANGES SEE SHEETS 1 AND 2.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.