FED. SUP CLASS
5305

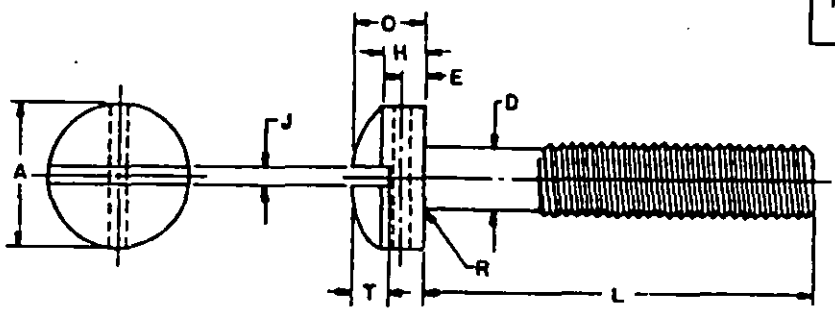


TABLE I

NOMINAL SIZE		(#2) .086	(#4) .112	(#6) .138	(#8) .164	(#10) .190	(1/4) .250	(5/16) .3125	(3/8) .375
THREADS PER INCH, UNC-2A		56	40	32	32	24	20	18	16
D BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3135	.3750
	MIN	.0717	.0925	.1141	.1399	.1586	.2127	.2712	.3287
A HEAD DIAMETER	MAX	.140	.183	.226	.270	.313	.414	.518	.622
	MIN	.124	.166	.208	.250	.292	.389	.490	.590
H HEAD SIDE HEIGHT	MAX	.062	.079	.096	.113	.130	.170	.211	.253
	MIN	.055	.072	.089	.106	.123	.161	.201	.242
O TOTAL HEAD HEIGHT	MAX	.083	.107	.132	.156	.180	.237	.295	.355
	MIN	.070	.094	.118	.141	.165	.219	.276	.333
J SLOT WIDTH	MAX	.031	.039	.048	.054	.060	.075	.084	.094
	MIN	.023	.031	.039	.045	.050	.064	.072	.081
T SLOT DEPTH	MAX	.030	.038	.045	.065	.075	.102	.130	.154
	MIN	.022	.030	.035	.054	.064	.087	.110	.134
E DRILL LOCATION	NOM	.026	.035	.043	.043	.043	.062	.078	.094
DRILLED HOLE SIZE	NOM	.031	.037	.046	.046	.046	.062	.070	.070
R RADIUS	MAX	.013	.017	.021	.025	.029	.038	.047	.056
TENSILE STRENGTH, LB-MIN		210	340	520	600	1000	1610	2990	4420

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.125	+0 -.031	1	11	24	39				
.188		2	12	25	40	58			
.250		3	13	26	41	59			
.312		4	14	27	42	60	76		
.375		5	15	28	43	61	77	92	
.438		6	16	29	44	62	78	93	
.500		7	17	30	45	63	79	94	107
.625		8	18	31	46	64	80	95	108
.750		9	19	32	47	65	81	96	109
.875		10	20	33	48	66	82	97	110
1.000			21	34	49	67	83	98	111
1.250			22	35	50	68	84	99	112
1.500	+0 -.062		23	36	51	69	85	100	113
1.750				37	52	70	86	101	114
2.000				38	53	71	87	102	115
2.250					54	72	88	103	116
2.500	+0 -.094				55	73	89	104	117
2.750					56	74	90	105	118
3.000					57	75	91	106	119

© ENTIRE STANDARD REVISED

APPROVED 8 FEB 1984. REVISED (A) 18 JUN 1982 (B) 29 JUL 1968 (C) 14 JUN 1978

REVIEW: CL, ME, EA, TN, AR, MI, AT
USER: SH, GL, MA, YD, PA, WV, MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Suggestion for all new engineering and design applications and for repetitive use shall be made from this document, once available.

P.A. VC	TITLE	MILITARY STANDARD
Other Cust AS 82	SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, BRASS, BLACK CHEMICAL FINISH, UNC-2A	MS35273
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: [illegible]	SHEET 1 OF 4

DD FORM 672-1 (COORDINATED) 5305-1194

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOTES:

1. MATERIAL: Brass, in accordance with QQ-B-626 or QQ-W-321 having minimum ultimate tensile strength of 57,000 PSI.

2. PROTECTIVE COATING: Black Chemical Finish in accordance with MIL-F-495.

3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.

4. THREAD LENGTHS: Screws 2.00 inches long and shorter shall have complete threads extending to within two threads of the head, or closer if practicable. Longer screws shall have a minimum thread length of 1.50 inches.

5. DIMENSIONS: All dimensions are in inches unless otherwise specified.

6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35273-1

7. Drilled hole is to be approximately at right angles to the slot and may be permitted to break through the bottom of the slot. All sharp edges shall be removed.

8. Referenced documents shall be of the issue in effect on date of invitations for bid.

9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEW: GL, ME, EA, AV, MI, AT
USER: SM, GL, MA, YD, MS, SP, MC

APPROVED 9 FEB 1954 REVISED (A) 18 JUN 1962 (B) 29 JUL 1965 (C) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when available.

P.A. WC Other Cont. MS 82	TITLE SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, BRASS, BLACK CHEMICAL FINISH, UNC-2A	MILITARY STANDARD MS35273
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES [illegible], MS35265 AND SCHH1	SHEET 2 OF 4

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

TABLE II
INTERCHANGEABILITY TABLE

The screws covered by the dash numbers given in MS35271 and in part AN500 are cancelled/inactivated after the approval date of revision B indicated on this document. Use the dash numbers given in the preceding sheets. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for design and replacement. Replacement shall be in accordance with this table.

PART NUMBERS		
CANCELLED		SUPERSEDED BY
MS35271	AN500	MS35273
1		1
2	AB2-3	2
3	AB2-4	3
4	AB2-5	4
5	AB2-6	5
6	AB2-7	6
7	AB2-8	7
8	AB2-10	8
9	AB2-12	9
10		10
	AB3-3 thru AB3-8	No Replacement
	AB3-10	No Replacement
	AB3-12	No Replacement
11		11
12	AB4-3	12
13	AB4-4	13
14	AB4-5	14
15	AB4-6	15
16	AB4-7	16
17	AB4-8	17
18	AB4-10	18
19	AB4-12	19
20		20
21		21
22		22
23		23
	AB5-3 thru AB5-8	No Replacement
	AB5-10	No Replacement
	AB5-12	No Replacement
24		24
25	AB6-3	25
26	AB6-4	26
27	AB6-5	27
28	AB6-6	28
29	AB6-7	29
30	AB6-8	30
31	AB6-10	31
32	AB6-12	32
33	AB6-14	33
34	AB6-16	34
	AB6-18	No Replacement
35	AB6-20	35
	AB6-22	No Replacement
36	AB6-24	36
37	AB6-28	37
38	AB6-32	38
39		39
40		40
41	AB8-4	41
42	AB8-5	42
43	AB8-6	43
44	AB8-7	44
45	AB8-8	45
46	AB8-10	46
47	AB8-12	47
48	AB8-14	48
49	AB8-16	49
	AB8-18	No Replacement
50	AB8-20	50
	AB8-22	No Replacement
51	AB8-24	51
52	AB8-28	52
53	AB8-32	53
54		54
55		55
56		56
57		57
58		58
59	AB10-4	59
60	AB10-5	60

PART NUMBERS		
CANCELLED		SUPERSEDED BY
MS35271	AN500	MS35273
61	AB10-6	61
62	AB10-7	62
63	AB10-8	63
64	AB10-10	64
65	AB10-12	65
66	AB10-14	66
67	AB10-16	67
	AB10-18	No Replacement
68	AB10-20	68
	AB10-22	No Replacement
69	AB10-24	69
70	AB10-28	70
71	AB10-32	71
72		72
73	AB10-40	73
74		74
75	AB10-48	75
76		76
77	AB416-6	77
78	AB416-7	78
79	AB416-8	79
80	AB416-10	80
81	AB416-12	81
82	AB416-14	82
83	AB416-16	83
	AB416-18	No Replacement
84	AB416-20	84
	AB416-22	No Replacement
85	AB416-24	85
86	AB416-28	86
87	AB416-32	87
88		88
89	AB416-40	89
90		90
91	AB416-48	91
92	AB516-6	92
93	AB516-7	93
94	AB516-8	94
95	AB516-10	95
96	AB516-12	96
97	AB516-14	97
98	AB516-16	98
	AB516-18	No Replacement
99	AB516-20	99
	AB516-22	No Replacement
100	AB516-24	100
101	AB516-28	101
102	AB516-32	102
103		103
104	AB516-40	104
105		105
106	AB516-48	106
	AB616-6	No Replacement
	AB616-7	No Replacement
107	AB616-8	107
108	AB616-10	108
109	AB616-12	109
110	AB616-14	110
111	AB616-16	111
	AB616-18	No Replacement
112	AB616-20	112
	AB616-22	No Replacement
113	AB616-24	113
114	AB616-28	114
115	AB616-32	115
116		116
117	AB616-40	117
118		118
119	AB616-48	119

APPROVED FEB 9, 1954 REVISED (8) 29 JUL 1965 (C) FOR CHANGES SEE SHEET 1.

REVIEW: EL, ME, EA, IR, AV, MI, AT
USER: DN, SL, MI, YD, PA, WY, MC

This standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design and for repetitive use shall be made from this document, unless otherwise specified.

F.S.C.	VC
Other Cust	A8
	B2

TITLE: SCREW, MACHINE - DRILLED FILLISTER HEAD, SLOTTED, BRASS, BLACK CHEMICAL FINISH, UNC-2A

MILITARY STANDARD
MS35273

PROCUREMENT SPECIFICATION	SUPERSEDED: MS35271, BCP13, BCP13.1, BCP14, AMEND 1R PART, MS35364, MS35366 AND BCP81.	SHEET 3 OF 4
FF-S-92		

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

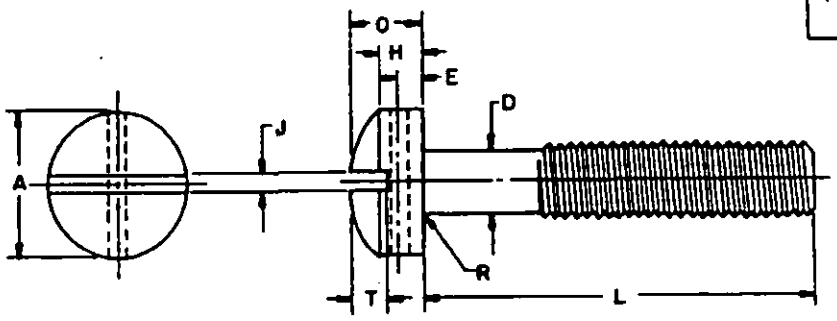


TABLE III
METRIC TRANSLATION OF TABLE I

	NOMINAL SIZE	MM	2.184	2.845	3.505	4.166	4.826	6.350	7.938	9.525
	PITCH		.45	.64	.79	.79	1.06	1.27	1.41	1.59
B	BODY DIAMETER	MAX	2.184	2.845	3.505	4.166	4.826	6.350	7.938	9.525
		MIN	1.821	2.350	2.898	3.553	4.028	5.403	6.888	8.349
A	HEAD DIAMETER	MAX	3.556	4.648	5.740	6.858	7.950	10.516	13.157	15.799
		MIN	3.150	4.216	5.283	6.350	7.417	9.881	12.446	14.986
H	HEAD SIDE HEIGHT	MAX	1.575	2.007	2.438	2.870	3.302	4.318	5.359	6.426
		MIN	1.397	1.829	2.261	2.692	3.124	4.089	5.105	6.147
O	TOTAL HEAD HEIGHT	MAX	2.108	2.718	3.353	3.962	4.572	6.020	7.493	9.017
		MIN	1.778	2.388	2.997	3.581	4.191	5.563	7.010	8.458
J	SLOT WIDTH	MAX	.787	.991	1.219	1.372	1.524	1.905	2.134	2.388
		MIN	.584	.787	.991	1.143	1.270	1.626	1.829	2.057
T	SLOT DEPTH	MAX	.762	.965	1.143	1.651	1.905	2.591	3.302	3.912
		MIN	.559	.762	.889	1.372	1.626	2.210	2.794	3.404
E	DRILL LOCATION	NOM	.660	.889	1.092	1.092	1.092	1.575	1.981	2.388
	DRILLED HOLE SIZE	NOM	.787	.940	1.168	1.168	1.168	1.575	1.778	1.778
R	RADIUS	MAX	.330	.432	.533	.635	.737	.965	1.194	1.422
	TENSILE STRENGTH, KN-MIN		.941	1.523	2.330	3.585	4.482	8.112	13.401	19.811

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
3.175		1	11	24	39				
4.775		2	12	25	40	58			
6.350		3	13	26	41	59			
7.925		4	14	27	42	60	76		
9.525		5	15	28	43	61	77	92	
11.125	+0	6	16	29	44	62	78	93	
12.700	-.787	7	17	30	45	63	79	94	107
15.875		8	18	31	46	64	80	95	108
19.050		9	19	32	47	65	81	96	109
22.225		10	20	33	48	66	82	97	110
25.400			21	34	49	67	83	98	111
31.750			22	35	50	68	84	99	112
38.100	+0		23	36	51	69	85	100	113
44.450	-1.575			37	52	70	86	101	114
50.800				38	53	71	87	102	115
57.150					54	72	88	103	116
63.500	+0				55	73	89	104	117
69.850	-2.388				56	74	90	105	118
76.200					57	75	91	106	119

NOTE: All dimensions are in millimetres (mm), unless otherwise specified, and are based on an approximate conversion factor of 25.4mm equals one inch.

APPROVED 9 FEB 1954 REVISED (A) 18 JAN 1962 (B) 29 JUL 1965

*R CHANGES SEE SHEET 1.

REVIEW: CL, NE, EA, IS, AV, MI, AT
USERS: SH, GL, MU, TO, PA, WV, MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when available.

P.A. VC Other Cont 86 82	TITLE SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, BRASS, BLACK CHEMICAL FINISH, UNC-2A	MILITARY STANDARD MS35273
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: [illegible]	SHEET 4 OF 4

DD FORM 672-1 COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.