
FED. SUP CLASS
5930

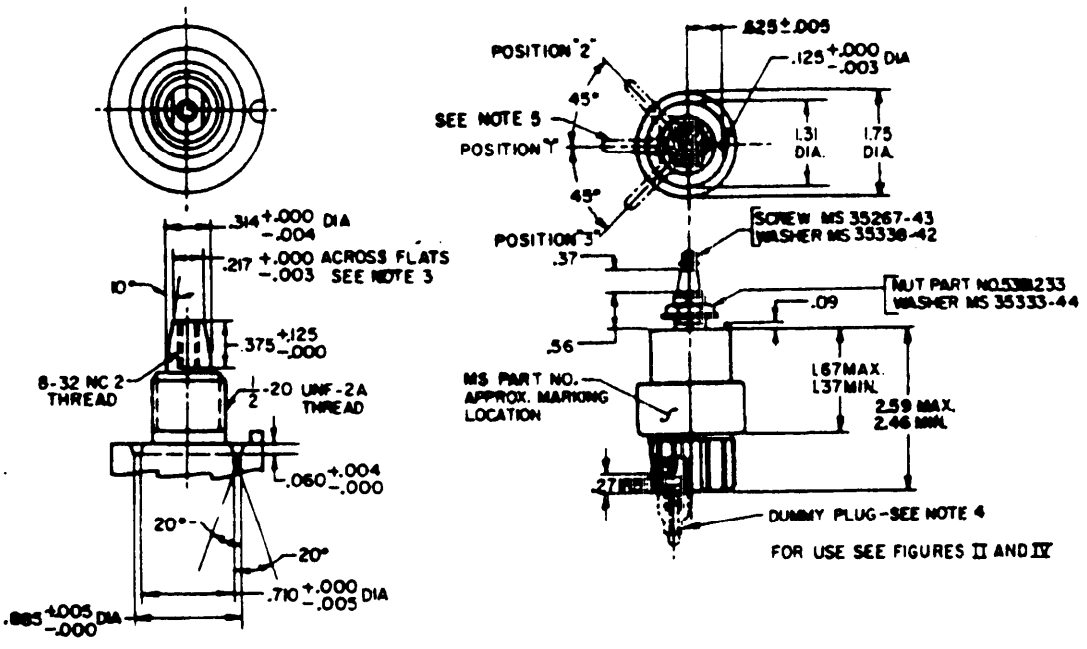

LEVER STEM DETAIL

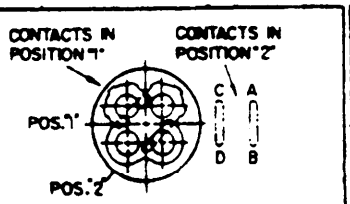


FIGURE I - MPST

WITH LEVER IN POSITION "1" SWITCH IS OFF, WITH LEVER IN POSITION "2" CONTACTS "A" & "B" ARE CLOSED AND "C" & "D" ARE CLOSED.

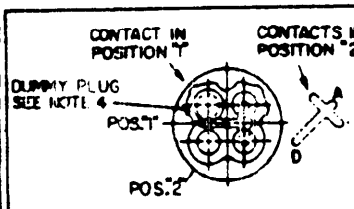


FIGURE II - SPMT

SELECTING SWITCH-SHORTING CIRCUITS CONTACT "A" IS COMMON WITH LEVER IN POSITION "1" CONTACTS "A" & "B" ARE CLOSED, WITH LEVER IN POSITION "2" CONTACTS "A" & "D" ARE CLOSED.

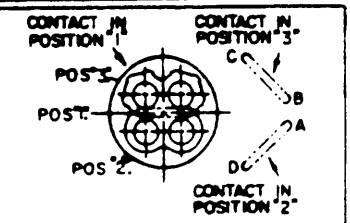


FIGURE III - MPMT

WITH LEVER IN POSITION "1" SWITCH IS OFF, WITH LEVER IN POSITION "2" CONTACTS "A" & "D" ARE CLOSED, WITH LEVER IN POSITION "3" CONTACTS "B" & "C" ARE CLOSED.




FIGURE IV - SPST

TYPE III SWITCH TO BE USED AS A SPST SWITCH BY USING CONTACTS "A" & "B" OR "C" & "D" DUMMY PLUG - SEE NOTE 4 - TO BE INSERTED IN UNUSED CONTACTS ON APPLICABLE VEHICLE ASSEMBLY

Ⓐ ENTIRE STANDARD REVISED

APPROVED 30 DECEMBER 1958 REVISED Ⓐ 22 JUNE 1967

USER ACTIVITIES: ARMY-AV, ME

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P A ARMY-AT Other Cust	TITLE SWITCH, ROTARY; 28 VOLT DC, WATERPROOF	MILITARY STANDARD MS39060(AT)
PROCUREMENT SPECIFICATION MIL-S-13623	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5930

MS PART NUMBER	FORMER PART NO.	SWITCH TYPE	FIGURE NO.	LEVER POSITION			LEAD CIRCUITRY		
				1	2	3	POSITION 1	POSITION 2	POSITION 3
MS 39060-1	8380700	II	II	ON	ON	NONE	A & B CLOSED	A & D CLOSED	NONE
MS 39060-2	8380699	III	I	OFF	ON	NONE	OFF	A&B, C&D CLOSED	NONE
MS 39060-3	8380701	IV	III	OFF	ON	ON	OFF	A & D CLOSED	B & C CLOSED
MS 39060-4		I	IV						

NOTES:

1. SWITCH TYPES:
   TYPE I (SINGLE POLE, SINGLE THROW) CLASS I.
   TYPE II (SINGLE POLE, MULTI-THROW) CLASS I.
   TYPE III (MULTI-POLE, SINGLE THROW) CLASS I.
   TYPE IV (MULTI-POLE, MULTI-THROW) CLASS I.
2. CONTACT RATING (AT 28 VOLTS): 10 AMP RESISTIVE LOAD; 10 AMP INDUCTIVE LOAD; 5 AMP LAMP LOAD.
3. FLATS SHALL BE AS SHOWN WHEN THE SWITCH LEVER IS IN POSITION 1.
4. PLAIN CONNECTORS MATE WITH MS27144-1 AND MS27144-2. RIBBED CONNECTORS MATE WITH MS27144-3. DUMMY CONNECTORS (8398564 WITH 79042907) NOT SUPPLIED AS PART OF SWITCH.
5. LEVER SHALL NOT BE SUPPLIED AS PART OF SWITCH. LEVER WHICH SHALL BE DETERMINED BY VEHICLE APPLICATION. FOR INFORMATION AND REFERENCE ONLY SEE DRAWINGS 10988915, AND 10990483.
6. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.02 ON DECIMALS; ±2° ON ANGLES.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.
9. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
10. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS A DASH NUMBER. EXAMPLE: MS 39060-2.
11. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130. IDENTIFICATION MARKING OF TERMINALS A,B,C AND D SHALL BE ADJACENT TO THE TERMINALS.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 30 DECEMBER 1958 REVISED Ⓐ 22 JUNE 1967

USER ACTIVITIES: ARMY - AV, ME

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P & A ARMY-AT
Other Cust

SWITCH, ROTARY; 28 VOLT DC, WATERPROOF

MILITARY STANDARD
MS39060 (AT)

DEPARTMENT SPECIFICATION SUPERSEDES
MIL-S 13623

SHEET 2

DD FORM 672-1 (Effective coordination) ☆ U.S. GOVERNMENT PRINTING OFFICE - 1967: 301-509/416

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.