
FED. SUP CLASS
3030

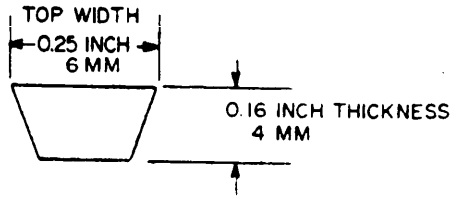

BELT CROSS SECTION, NOMINAL

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH

EFFECTIVE LENGTHS-INCHES

DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-2L080	8.0	+0.12-0.38
-2L090	9.0	+0.12-0.38
-2L100	10.0	+0.12-0.38
-2L110	11.0	+0.12-0.38
-2L120	12.0	+0.12-0.38
-2L130	13.0	+0.12-0.38
-2L140	14.0	+0.12-0.38
-2L150	15.0	+0.12-0.38
-2L160	16.0	+0.12-0.38
-2L170	17.0	+0.12-0.38
-2L180	18.0	+0.12-0.38
-2L190	19.0	+0.12-0.38
-2L200	20.0	+0.12-0.38

EFFECTIVE LENGTHS-MILLIMETERS

DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-6R205	205	+3-10
-6R230	230	+3-10
-6R255	255	+3-10
-6R280	280	+3-10
-6R305	305	+3-10
-6R330	330	+3-10
-6R355	355	+3-10
-6R380	380	+3-10
-6R405	405	+3-10
-6R430	430	+3-10
-6R455	455	+3-10
-6R485	485	+3-10
-6R510	510	+3-10

NOTES:

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -2L SERIES FOR INCH MEASUREMENT OR -6R SERIES FOR MILLIMETER MEASUREMENT.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT SIZES. EXAMPLE: -2L080, THE -2L INDICATES CROSS SECTION DESIGNATION IN INCH DIMENSIONS, 080 INDICATES EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES; -6R205, THE -6R INDICATES CROSS SECTION DESIGNATION IN MILLIMETERS, 205 INDICATES EFFECTIVE OUTSIDE LENGTH IN MILLIMETERS.

ENTIRE STANDARD REVISED

APPROVED 31 AUGUST 1964 REVISED (A) 9 MAY 1973 (B) 22 JUNE 1981

REVIEW ACTIVITIES: CS
USER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	99		BELTS, V: FRACTIONAL HORSEPOWER (2L OR 6R CROSS-SECTIONAL DESIGNATION).	MS 39240
PROCUREMENT SPECIFICATION ZZ-B-215		SUPERSEDES		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

3030-0122

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

5. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN ZZ-B-215. WHEN OIL-RESISTANCE IS REQUIRED, THE DASH PRECEDING THE DASH NUMBER SHALL BE REPLACED BY THE LETTER "R".
6. THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN APPLICABLE), PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

EXAMPLES:

MS 39240 - 2L 080

- 080 — 8 INCH EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES
- 2L — CROSS SECTION DESIGNATION

MS 39240 R 6R 205

- 205 — 205 MM EFFECTIVE OUTSIDE LENGTH
- 6R — CROSS SECTION DESIGNATION
- R — OIL-RESISTANCE REQUIRED.

7. BELT RIDE LIMITS ARE +0.04, −0.03 INCH (+1.0, −0.8 MM); MIN. BOTTOM CLEARANCE IS 0.05 INCH (1.3 MM) ON TEST PULLEY. SEE APPLICABLE PARAGRAPH IN ZZ-B-215.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

(B) FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 31 AUGUST 1964 REVISED

P. A. ME Other Cust 99	INTERNATIONAL INTEREST	TITLE BELTS, V: FRACTIONAL HORSEPOWER (2L OR 6R CROSS-SECTIONAL DESIGNATION).	MILITARY STANDARD MS 39240
PROCUREMENT SPECIFICATION ZZ-B-215	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.