



FED. SUP CLASS
2330

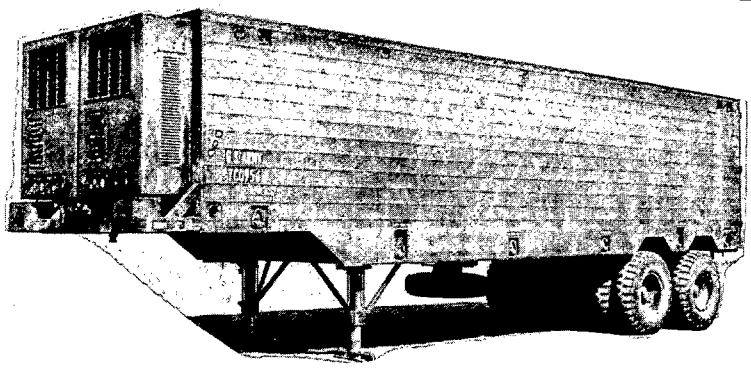

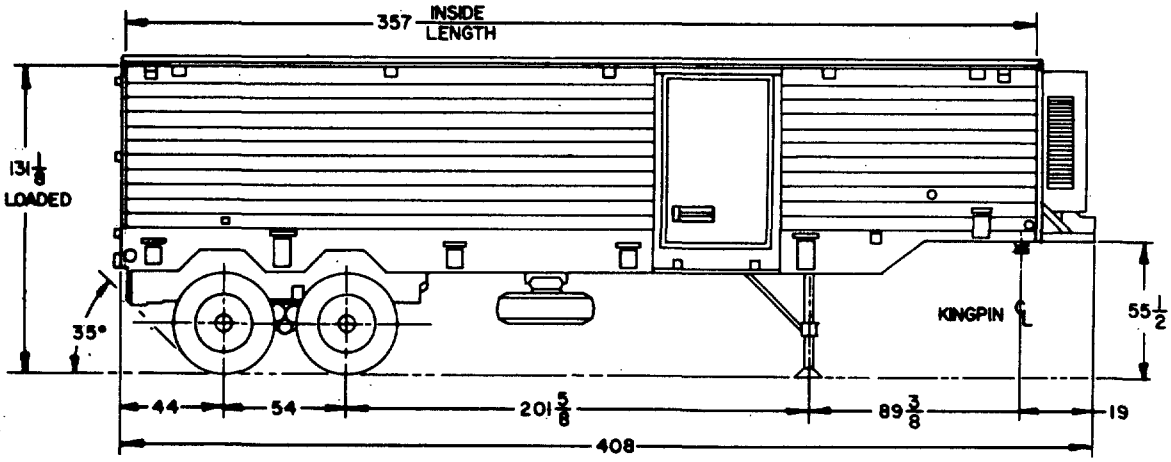

Ⓐ CANCELLED AFTER 22 SEPTEMBER 1976

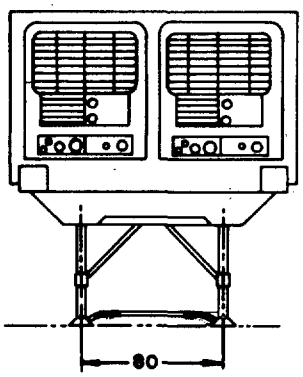

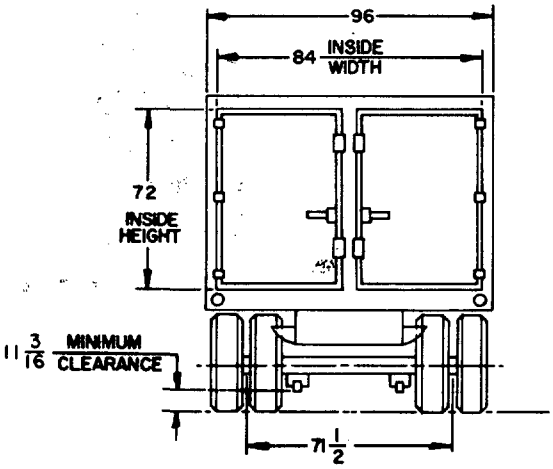

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

MS PART NO.	ENGINEERING PARTS LIST
MS 500002 —1	8736330

P.A. MO (ATAC) Other Cust AF-84	TITLE SEMITRAILER, REFRIGERATOR, 15 TON, 4 WHEEL, M347	MILITARY STANDARD MS 500002
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) Previous editions of this form are obsolete.

2330-0653

REVIEW ACTIVITY: ARMY-GL
USER ACTIVITY: ARMY-EL

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document."

APPROVED 3 AUGUST 1965 REVISED Ⓐ 22 SEPTEMBER 1976

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5 TON, 6X6, M52, OR EQUAL.
(REFERENCE WEIGHTS FOR INFORMATION ONLY)

CURB WEIGHT: 16,350 LBS

WEIGHT DISTRIBUTION:

KING PIN:	5700
AXLE:	10650
LANDING GEAR:	6855
AXLE:	9495 LBS

MAX. WEIGHT: INCLUDING BODY AND PAYLOAD WITH PAYLOAD EVENLY DISTRIBUTED.

	HIGHWAY
KING PIN:	16000
AXLE:	30000
	46000 LBS

GENERAL:

THE SEMITRAILER, REFRIGERATOR, 15 TON, 4 WHEEL, M347, IS USED TO PROVIDE REFRIGERATED STORAGE SPACE FOR PERISHABLE ITEMS. THE ALUMINUM BODY AND SUB FRAME IS MOUNTED ON A STEEL UNDERCARRIAGE SUPPORTED BY AIR RIDE TANDEM SUSPENSION SYSTEM ATTACHED TO TWO (2) DUAL WHEEL STANDARD 18000 POUND LOAD RATED AXLES. THE SEMITRAILER HAS A VERTICAL SCREW-TYPE FRONT LANDING GEAR, INTERIOR AND EXTERIOR LIGHTING SYSTEM, BRAKING SYSTEM, SPARE WHEEL AND AUXILIARY EQUIPMENT.

KING PIN: 2 INCH DIA. PART NO. MS 53036-1

LANDING GEAR:

ACTUATION: TWO SPEED MANUALLY OPERATED
STROKE FULLY EXTENDED: 15 INCHES

ELECTRICAL SYSTEM:

POTENTIAL: 24 VOLTS
REFRIGERATION UNIT: POTENTIAL 12 VOLTS

FRAME ASSEMBLY:

DROP FRAME DESIGN 33 FEET 10-1/2 INCHES LONG AND 7 FEET 11-3/8 INCHES WIDE

PINTLE: PART NO. MS 51118-1

AXLE: PART NO. MS 35865-C4

SPRINGS: AIR RIDE TANDEM SUSPENSION

WHEELS: DUAL PART NO. MS 53044-6
SIZE: 7.5 X 20 NOMINAL RIM SIZE

TIRES: 11.00 x 20, 12 PLY, PART NO. MS 35388-21
TREAD DESIGN: NDCC
TUBE: PART NO. MS 35392-15

BRAKES: AIR-OVER-HYDRAULIC
SIZE: 16-1/2 x 5-1/2
BRAKE ASSY LH: PART NO. 8710719
BRAKE ASSY RH: PART NO. 8710720
EMERGENCY RELAY VALVE: PART NO. MS 53004-1
AIR RESERVOIR: PART NO. 7979238

REFRIGERATION UNIT: TYPE 1 OF MIL-R-10735

FORDING DEPTH: 5 FEET

CHOCK BLOCKS: TWO (2) PART NO. 7979235-C

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN).

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID).

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

APPROVED 3 AUGUST 1965 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) Other Cust AF-84	TITLE SEMITRAILER, REFRIGERATOR, 15 TON, 4 WHEEL, M347	MILITARY STANDARD MS 500002
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.