



FED. SUP CLASS
2320

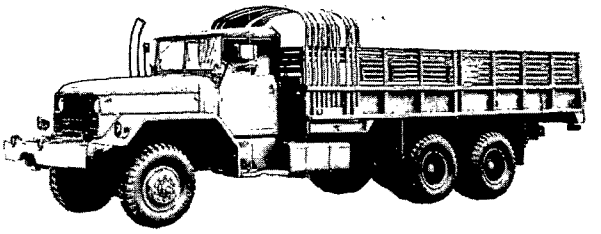

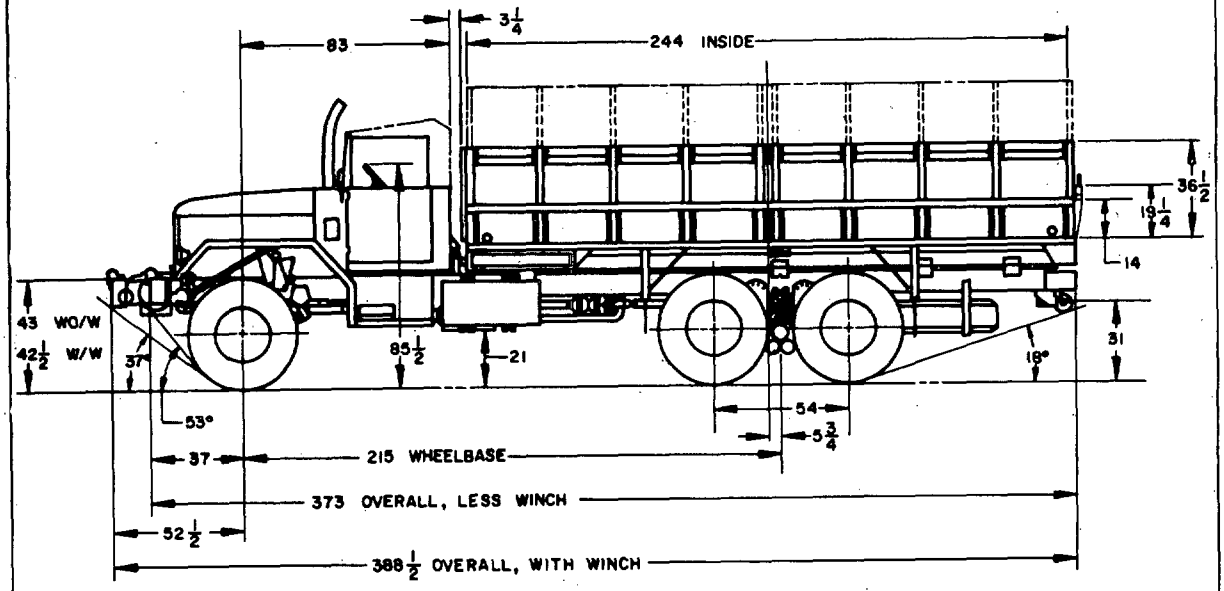

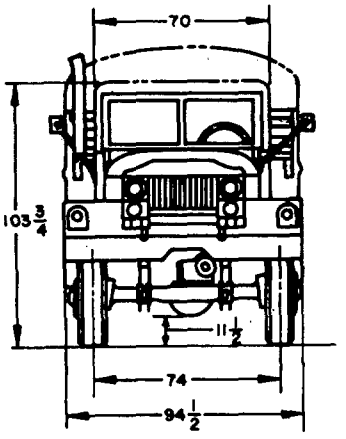

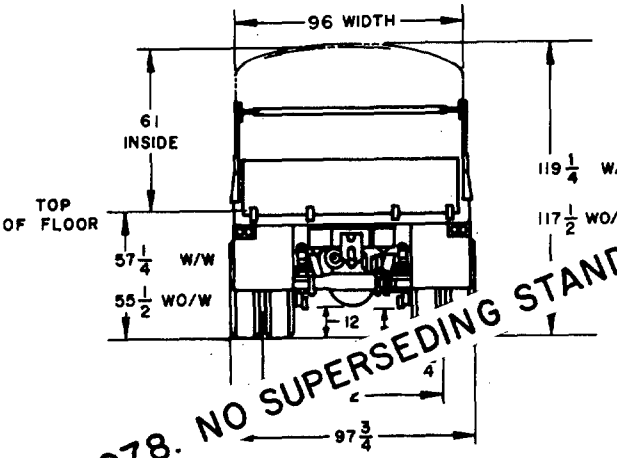

CANCELED AFTER 4 MAY 1978. NO SUPERSEDING STANDARD.

CERTAIN PROVISIONS OF THIS STANDA[illegible]ED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NA[illegible]-A (EDITION 3). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHIC[illegible]T OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TA[illegible]E RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDI[illegible]NTAL STANDARDIZATION OFFICES, IF REQUIRED.

(A) ALL HEIGHT DIMENSIONS ARE WITHOUT PAYLOAD.

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

MS PART NO.	ENGINEERING PARTS LIST	
MS500084-1	8736522	WITH WINCH
MS500084-2	8736523	LESS WINCH

P.A. ARMY-AT Other Cust NAVY-MC AF-99	International Interest	TITLE: TRUCK, CARGO, 5 TON, 6X6, 215 INCH WHEELBASE, MILITARY DESIGN, M55A2	MILITARY STANDARD MS500084
PROCUREMENT SPECIFICATION MIL-T-740		SUPERSEDES:	SHEET 1 OF 2

APPROVED 27 OCTOBER 1967 REVISED (A) 29 JUNE 1978

USER ACTIVITIES: ARMY-EL; NAVY-YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

FED. SUP. CLASS 2320

CHASSIS: W/WINCH, M63A2 8736527

CHASSIS: WO/WINCH, M63A2 8736528

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND PERSONNEL

	WO/WINCH	W/WINCH
FRONT AXLE	7880	8840
REAR AXLE, BOGIE	15160	15060
TOTAL	23040 LBS	23900 LBS

WEIGHT DISTRIBUTION: LOADED, PLUS 400 LB CREW

	CROSS COUNTRY		HIGHWAY	
	WO/W	W/W	WO/W	W/W
PAYLOAD	10400	10400	20400	20400
FRONT AXLE	8320	9280	8490	9450
BOGIE AXLE	25120	25020	34950	34850
TOTAL LBS.	33440	34300	43440	44300

TOWED LOAD ALLOWANCE:
LIMITED CROSS COUNTRY 15000 LBS
HIGHWAY 30000 LBS

*FORDING DEPTH: 30 INCHES
WITH FORDING KIT, 78 INCHES

CARGO BODY: INSTL 10871358
CARGO BODY, ASSY 10871357
CAB ASSY 10883174-1
CAB SUPPORT INSTL 10883228-1

GENERAL:
THIS VEHICLE IS USED TO TRANSPORT GENERAL CARGO OR PERSONNEL. THE CAB IS CANVAS COVERED, OPEN TYPE. THE BODY IS (244 X 88 INCHES INSIDE) FLAT BED TYPE HAVING A HEAVY WOOD FLOOR UNDER A METAL PLATE. SIDES AND TARPAULIN FRAME ARE REMOVEABLE, 14 INCH SIDES. 19-1/4 INCH TAILGATE, 61 INCH FLOOR TO UNDER SIDE OF BOWS. COMPLETE WITH SIDE RACKS, TARPS AND TROOP SEATS. THE TROOP SEAT AND LAZYBACKS ON EACH SIDE ARE FURNISHED IN TWO SECTIONS TO FACILITATE HANDLING.

BODY CARGO SPACE: 744 CU FT
BODY INCLUDES TEN TOP BOWS WITH TARPAULIN AND END FLAPS. STEP ON TAILGATE FOR EASE OF ENTRANCE.

POWER PLANT: LDS 465-1A INSTL 10938275-1
ENGINE; MULTIFUEL, 478 CU IN. 10951400
SIX CYLINDER, 4.56 BORE X 4.87 STROKE
BRAKE HP 198 @ GOVERNED SPEED, 2800 RPM
FUEL TANK; 78 GAL CAPACITY INSTL 10938398
EXHAUST SYSTEM, VERTICAL INSTL 11593176

TRANSMISSION: W/WINCH INSTL 10871448
WO/WINCH INSTL 10871449
TRANSMISSION 8333627
FORWARD SPEEDS, FIVE
RATIOS; 7.31, 4.08, 2.41, 1.43, 1.00
REVERSE, ONE; RATIO 7.33:1

TRANSFER: INSTL 10899367
RATIOS; HIGH, 1:1 LOW, 2.024:1

FRONT SUSPENSION: INSTL 10871261
FRONT AXLE 7346805
SHOCK ABSORBERS, TWO 7409617
SPRINGS, FRONT, TWO 7409345

FRAME ASSY: CHASSIS 10938330

FRONT BUMPER: INSTL 10883138

REAR BUMPER: INSTL 10883121

REAR SUSPENSION: INSTL 10883209
REAR AXLE ASSY., TWO 8327007
SPRINGS, REAR, TWO 7409613
TORQUE ROD ASSY., SIX 8728126

WHEELS: 20 X 7.5, OFFSET, 6-11/16 MS 53044-6
RING MS 53045-3

TIRES: 11.00 X 20, 12 PLY, TEN - MS 35388-21
TREAD DESIGN, NDOC; TUBE, TEN - MS 35392-15
ONE SPARE; TIRE AND TUBE

STEERING: CONTROL INSTL 8758369
STEERING GEAR 8728230

BRAKES: TUBING INSTL 10938416-1
DRUM SIZE; FRONT, 16-1/2 X 5-1/2
REAR, 16-1/2 X 5-1/2
ACTUATION, AIR/HYDRAULIC

BRAKES,PARKING: CONTROL INSTL 10883127
DRUM SIZE, 14 X 3, MOUNTED ON REAR OF TRANSFER

ELECTRICAL SYSTEM:
WATERPROOF AND RADIO SUPPRESSED
POTENTIAL, 24 VOLT
BATTERIES, TWO, 6 TN 12 VOLT MS 35000-4
STARTING MOTOR 10911018-1
GENERATOR 7355736
REGULATOR MS 51356-1
WIRING DIAGRAM 10938485
WIRING INSTL 10938386-1

REFLECTORS:
RED, FOUR MS 35387-1
AMBER, FOUR MS 35387-2

TIE DOWNS: 20 WITH WINCH 10883223
18 WITHOUT WINCH

PERFORMANCE: MAX SPEED, 54 MPH WITHOUT TOWED LOAD

FUEL	MPG	CRUISING RANGE, HWY
DIESEL	5.3	350
C.I.E.	4.83	319
GASOLINE	4.39	290

WINCH: CAPACITY, 20000 LBS INSTL 10871087
WINCH MS 51353-1

PINTLE: INSTL 10883506
HIGHWAY CAPACITY, 30000 LBS.
PINTLE MS 51117-1

KIT PROVISIONS:

FORDING KIT	5703702
PERSONNEL HEATER KIT	5703530
THERMAL BARRIER KIT	5702823
PERSONNEL HEATER,HOT WATER	5702006
HARDTOP CLOSURE KIT	5701443
ELECTRIC BRAKE KIT	5701909
A FRAME, FOR W/WINCH VEHICLES	8337178
AIR BRAKE KIT	8758174
POWER PLANT HEATER KIT	5703535
TIE DOWN KIT	5702813

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U.S. ARMY TANK-AUTOMOTIVE COMMAND
WARREN, MICHIGAN 48090

APPROVED 27 OCTOBER 1967 REVISED (A) FOR CHANGES SEE SHEET 1

P.A. Other Cust	International Interest	TITLE	MILITARY STANDARD
		TRUCK, CARGO, 5 TON, 6 X 6, 215 INCH WHEELBASE, MILITARY DESIGN, M55A2	MS500084
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.