
This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-P-45328

Form Approved
OMB No. 0704-0188

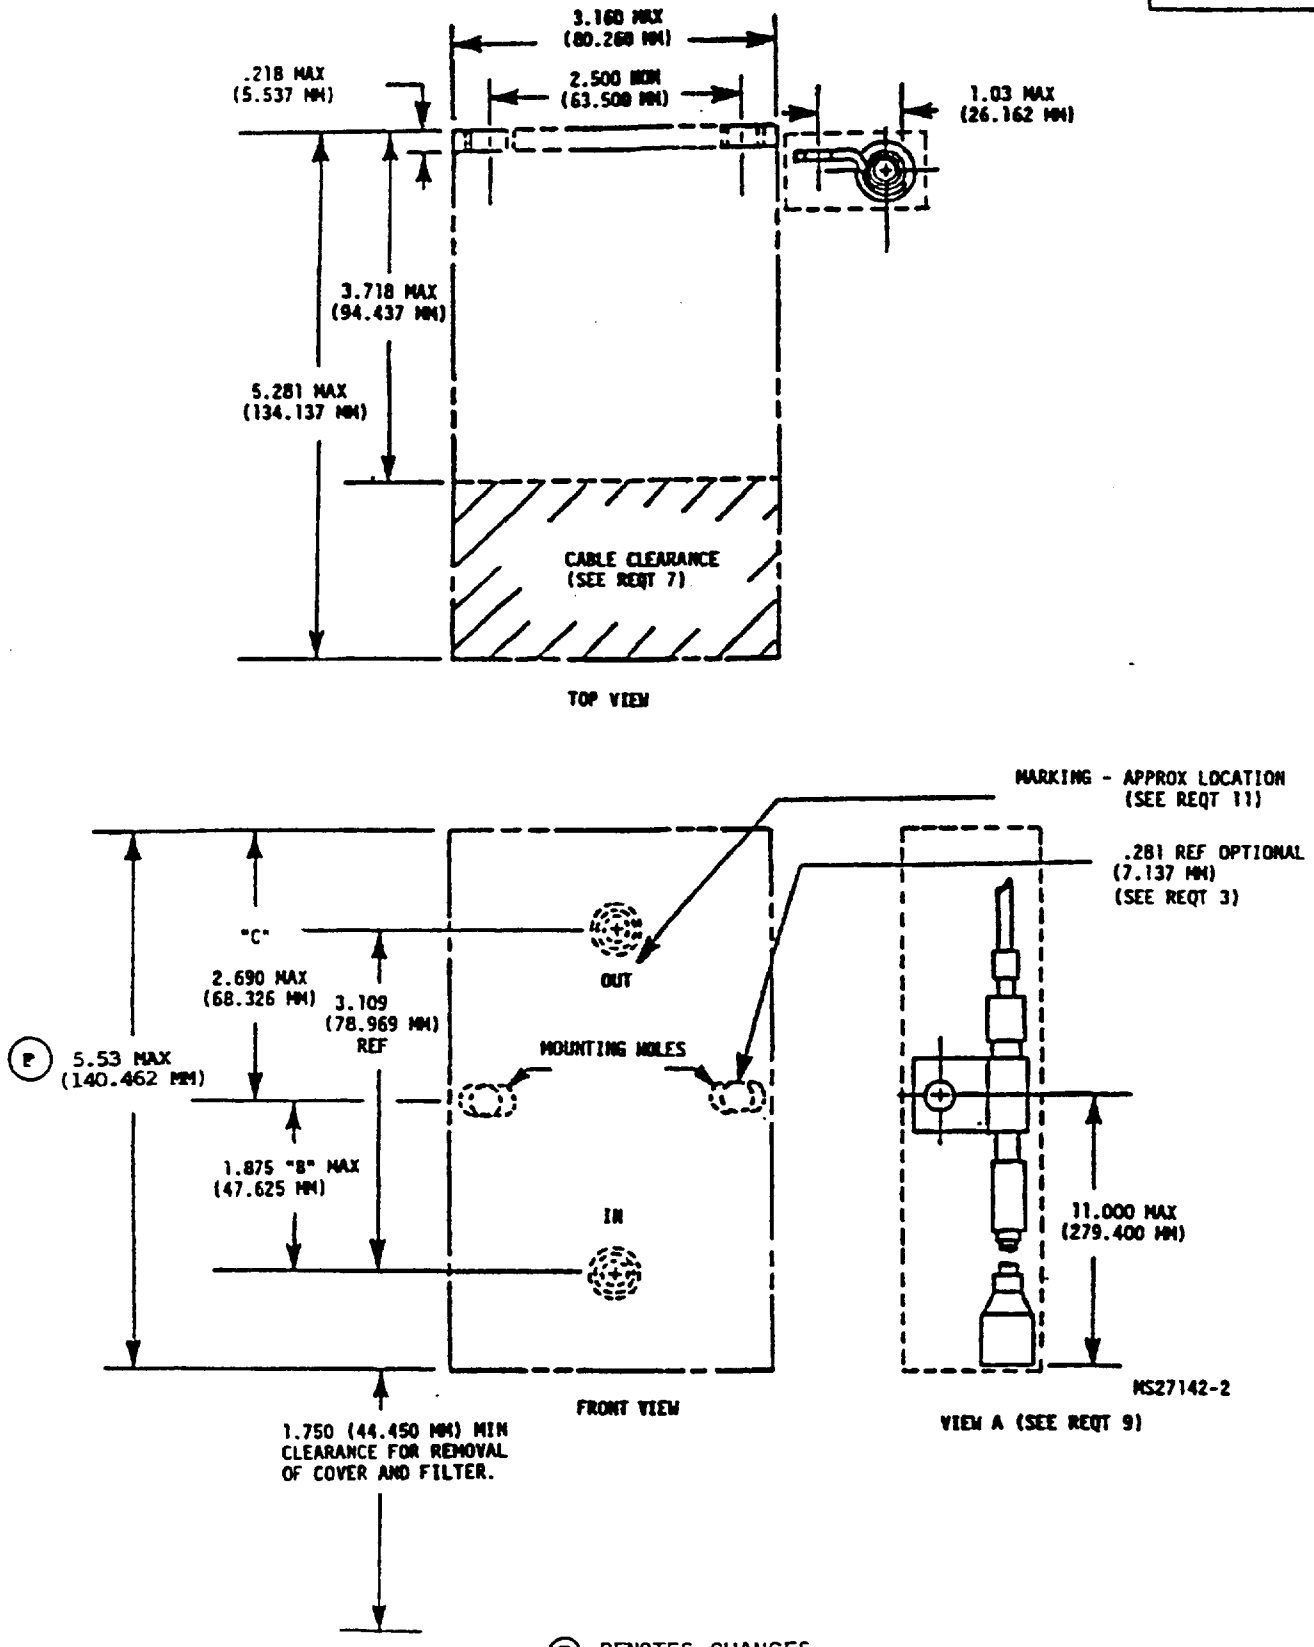

(P) DENOTES CHANGES

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- 99 REVIEW: ARMY-MI; DLA-CS USER: NAVY-MC PROJECT NUMBER: 2910-0198	MILITARY SPECIFICATION SHEET TITLE: PUMP, FUEL, ELECTRICAL- 12 AND 24 VOLT D.C., 25 G.P.H. CAPACITY	SPECIFICATION SHEET NUMBER: MS51321F 28 FEBRUARY 1991 SUPERSEDING: MS51321E, 14 APRIL 1989 AMSC-NA FSC- 2910


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-P-45328

This specification is approved for use by all Departments and Agencies of the Department of Defense.

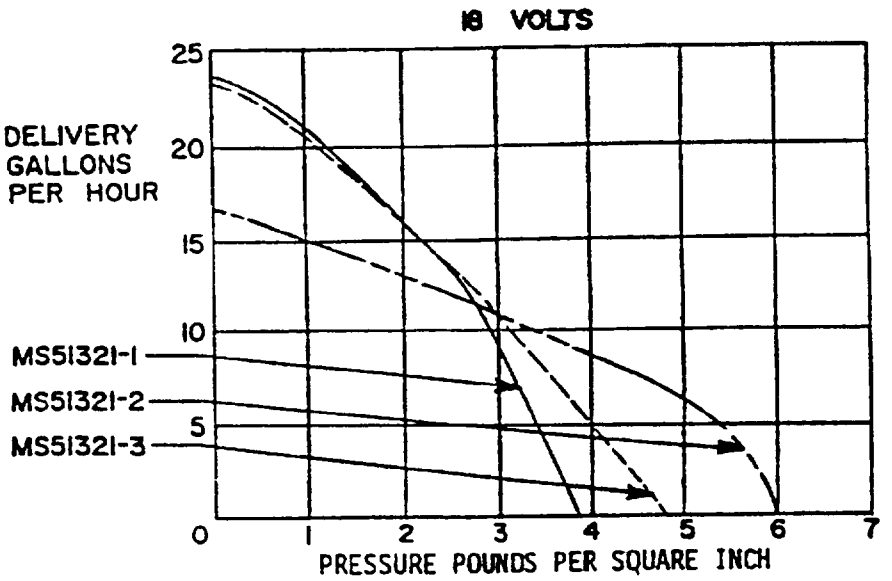

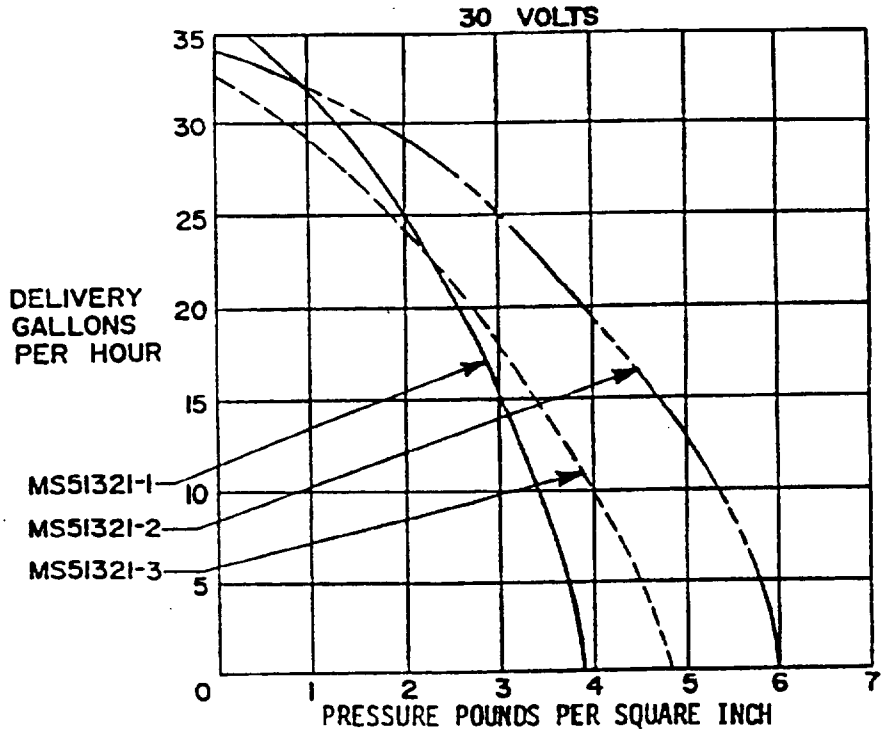

MS PART NO	FORMER PART NO	MAX. OUTPUT-PSI	INLET/OUTLET THREAD
MS51321-1	7392887	4-1/2 +1/4 -1/2	1/8-27 NPTF FEMALE
MS51321-2	10910278	7:1	1/4-18 NPTF MALE
MS51321-3	10861299	5-1/2 +1/4 -1/2	1/4-18 NPTF MALE

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- 99 REVIEW: ARMY-MI; DLA-CS USER: NAVY-MI; PROJECT NUMBER: 2910-0198	MILITARY SPECIFICATION SHEET TITLE: PUMP, FUEL, ELECTRICAL- 12 AND 24 VOLT D.C., 25 G.P.H. CAPACITY	SPECIFICATION SHEET NUMBER: MS51321F 28 FEBRUARY 1991 SUPERSEDING: MS51321E, 14 APRIL 1989 AMSC-NA FSC- 2910
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 2 of 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

...ements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-P-45328

REQUIREMENTS:

1. PUMP OUTPUT SHALL MEET MINIMUM REQUIREMENTS SPECIFIED ON APPLICABLE PERFORMANCE CURVES.
2. MOUNTING LOCATION SHALL BE CENTRAL WITH INLET/OUTLET LOCATION WITHIN "B" DIMENSION. MOUNTING LOCATION SHALL BE CENTRAL WITHIN OVERALL HEIGHT WITHIN "C" DIMENSION.
3. PUMP CONFIRURATION MUST ALLOW CLEARANCE, WITHIN ENVELOPE DIMENSIONS FOR INSTALLATION OF PUMP THROUGH MOUNTING HOLES. MOUNTING HOLES MAY BE .281 (7.137 MM) DIAMETER OR .281 BY .344 (7.137 MM BY 8.738 MM) OBLONG.
4. INLET AND OUTLET MUST PROTRUDE FROM PUMP BODY ENOUGH TO FACILITATE MECHANICAL CONNECTION OF FITTINGS.
5. INSTALLATION DESIGN MUST ALLOW .312 ± .031 INCH (7.92 MM ± .790 MM) VARIATION BETWEEN PLANES OF FACES OF INLET AND OUTLET.
6. CABLE SHALL BE NO. 14 AMERICAN WIRE GAUGE (AWG) AND SHALL CONFORM TO MIL-C-13486, TYPE 1, CLASS A. WHEN NECESSARY, PART OR ALL OF CABLE MAY CONFORM TO TYPE II, CLASS A OF MIL-C-13486, PROVIDED THAT A SEPARATE CABLE GROUND IS USED, WITH INSTALLATION CLEARANCE AS INDICATED IN VIEW A.
7. CABLE SHALL EXIT PUMP WITHIN, OR BEFORE, AREA MARKED," CABLE CLEARANCE".
8. CABLE CONNECTOR SHALL CONFORM TO MS27142-2.
9. CABLE AND CABLE GROUND ARE EXTERIOR TO PUMP BODY (SEE VIEW A). INSTALLATION MUST ALLOW FOR CABLE ASSEMBLY CLEARANCE.
10. PROTECTIVE FINISH:
    A. STEEL SURFACES - ZINC PLATE PER ASTN B633, Fe/Zn 5.
    B. ZINC SURFACES - CHROMATE TREAT PER MIL-T-12879, TYPE II.
11. MARKING SHALL BE AS INDICATED HEREON AND IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
    INLET SHALL BE MARKED "IN" AND OUTLET SHALL BE MARKED "OUT".
12. PART NUMBER SHALL BE FORMULATED TO INDICATED DASH NO., TYPE, VOLTAGE AND POLARITY.
    EXAMPLE OF PART NUMBER:

MS51321 - X - X X X X

DASH NO. 1, 2, OR 3 — 1 = TYPE I, MIL-P-45328; 2 = TYPE II, MIL-P-45328

12 OR 24 VOLT — POSITIVE OR NEG. GROUND

NOTES:

1. TOLERANCES ON DIMENSIONS ARE .010 FOR INCHES (.254 MM).
2. FOR INFORMATION OTHER THAN AS SHOWN, SEE PROCUREMENT SPECIFICATION.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. THE USE OF RECYCLED MATERIALS, WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM, SHALL BE ENCOURAGED.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

...Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT	MILITARY SPECIFICATION SHEET	SPECIFICATION SHEET NUMBER: MS51321F 28 FEBRUARY 1991
CUSTODIANS: ARMY- AT NAVY- AIR FORCE- 99	TITLE: PUMP, FUEL, ELECTRICAL- 12 AND 24 VOLT D.C., 25 G.P.H. CAPACITY	SUPERSEDING: MS51321E, 14 APRIL 1989
REVIEW: ARMY-MI; DLA-CS USER: NAVY-MI;		AMSC-NA FSC- 2910
PROJECT NUMBER: 2910-0198		
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 3 of 3

Source: https://assist.dla.mil — Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.