
FED. SUP CLASS
5950

(B) INACTIVE FOR NEW DESIGN AFTER 4 September 1985 USE MIL-C-39010/3

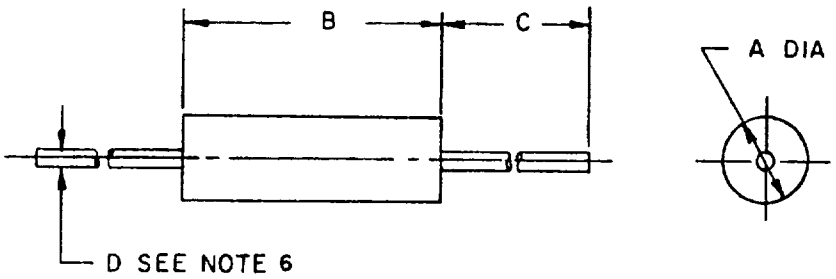

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.152 (3.86)	.172 (4.37)
B	.390 (9.91)	.430 (10.92)
C	1.250 (31.75)	1.626 (41.30)
D	.023 (.58)	.027 (.69)

RATINGS	
STYLE	LT10
GRADE	1
CLASS	A
TEMPERATURE RISE	15°C
AMBIENT TEMPERATURE	90°C
OPERATING TEMPERATURE	-55° to+105°C
DIELECTRIC WITHSTANDING VOLTAGE(sea level)	1000 volts rms for a minimum of 60 sec.
DIELECTRIC WITHSTANDING VOLTAGE(reduced barometric pressure)	200 volts rms for a minimum of 60 sec.
TERMINAL PULL	5 pounds
ALTITUDE	70,000 feet
PERCENT COUPLING	3 percent max.
WEIGHT	1.0 gram max.

(B) Denotes change

APPROVED 18 February 1971 REVISED (A) 7 September 1971 (B) 4 September 1985

User activities: Army ME, AR
Navy AS, MC, SH
Air Force 19

Reviewer activities: Army MI
Navy OS
Air Force 11, 17
DLA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A	ER	International Interest
Other Cust	EC	
	85	

TITLE, COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED (FERRITE CORE-FERRITE SLEEVE) TYPES, LT10K217 TO LT10K263 INCL

MILITARY STANDARD

MS 75089

Procurement Specification
MIL-C-15305

SUPERSEDES: MS90537 IN PART
PART NOS MS90537-27 THROUGH MS90537-73

SHEET 1 OF 3

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0650-08

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5950

User activities: Army ME, AR
Navy AS, MC, SH
Air Force 19

Reviewer activities: Army MI
Navy OS
Air Force 11, 17
DLA-ES

ELECTRICAL CHARACTERISTICS (INITIAL)											
Dash No 1/	Type 2/ designation	Former type designation	Superseded MS part No.	Inductance ±10%	Q min	Test frequency	Self-resonant frequency min	DC resistance at 25°C max	Rated DC curren	Incremental current
				uh		MHZ	MHZ	ohms	ma	ma
-1	LT10K217	LT4K268	MS90537-27	15 0	45	2 5	49	80	315	250
-2	LT10K218	LT4K269	-28	18 0	45	2 5	45	89	300	23
-3	LT10K219	LT4K270	-29	22 0	45	2 5	41	96	290	220
-4	LT10K220	LT4K271	-30	27 0	45	2 5	38	1 19	260	200
-5	LT10K221	LT4K272	-31	33 0	45	2 5	34	1 37	240	190
-6	LT10K222	LT4K273	-32	39 0	50	2 5	29	1 93	205	180
-7	LT10K223	LT4K274	-33	47 0	50	2 5	27	2 11	195	175
-8	LT10K224	LT4K275	-34	56 0	50	2 5	25	2 23	190	160
-9	LT10K225	LT4K276	-35	68 0	50	2 5	21	2 70	170	150
-10	LT10K226	LT4K277	-36	82 0	50	2 5	10 5	2 44	180	140
-11	LT10K227	LT4K278	-37	100 0	50	2 5	10 0	3 .2	160	120
-12	LT10K228	LT4K279	-38	120 0	55	79	9 7	3 60	150	95
-13	LT10K229	LT4K280	-39	150 0	55	79	8 5	4 10	140	90
-14	LT10K230	LT4K281	-40	180 0	55	79	8 0	4 40	135	85
-15	LT10K231	LT4K282	-41	220 0	55	79	7 5	5 00	125	80
-16	LT10K232	LT4K283	-42	270 0	55	79	7 0	5 80	115	70
-17	LT10K233	LT4K284	-43	330 0	55	79	6 5	6 40	110	65
-18	LT10K234	LT4K285	-44	390 0	60	79	6 2	7 40	105	60
-19	LT10K235	LT4K286	-45	470 0	60	79	5 7	9 50	92	58
-20	LT10K236	LT4K287	-46	560 0	60	79	4 7	10 5	90	55
-21	LT10K237	LT4K288	-47	680 0	60	79	4 5	11 8	80	50
-22	LT10K238	LT4K289	-48	820 0	60	79	4 2	13 0	80	45
-23	LT10K239	LT4K290	-49	1,000 0	60	79	3 8	17 5	70	40
-24	LT10K240	LT4K291	-50	1,200 0	45	25	1 5	22 1	60	35
-25	LT10K241	LT4K292	-51	1,500 0	45	25	1 2	26 5	55	33
-26	LT10K242	LT4K293	-52	1,800 0	45	25	1 0	29 9	50	30
-27	LT10K243	LT4K294	-53	2,200 0	45	25	97	33 8	50	27
-28	LT10K244	LT4K295	-54	2,700 0	45	25	92	47 3	40	25
-29	LT10K245	LT4K296	-55	3,300 0	45	25	84	53 0	40	22
-30	LT10K246	LT4K297	-56	3,900 0	45	25	80	73 8	35	20
-31	LT10K247	LT4K298	-57	4,700 0	45	25	74	81 6	31	19
-32	LT10K248	LT4K299	-58	5,600 0	44	25	73	98 9	28	17
-33	LT10K249	LT4K300	-59	6,800 0	40	25	66	111 0	27	16
-34	LT10K250	LT4K301	-60	8,200 0	40	25	54	119 0	26	15
-35	LT10K251	LT4K302	-61	10,000 0	40	25	47	137 0	24	14
-36	LT10K252	LT4K303	-62	12,000 0	30	079	33	143 0	23	13
-37	LT10K253	LT4K304	-63	15,000 0	30	079	29	157 0	22	12
-38	LT10K254	LT4K305	-64	18,000 0	30	079	28	175 0	21	10
-39	LT10K255	LT4K306	-65	22,000 0	27	079	25	274 0	17	9
-40	LT10K256	LT4K307	-66	27,000 0	27	079	21	308 0	16	8
-41	LT10K257	LT4K308	-67	33,000 0	27	079	19	343 0	15	7 5
-42	LT10K258	LT4K309	-68	39,000 0	27	079	17	376 0	15	6 6
-43	LT10K259	LT4K310	-69	47,000 0	23	079	16	475 0	13	5 5
-44	LT10K260	LT4K311	-70	56,000 0	23	079	14	512 0	13	5 0
-45	LT10K261	LT4K312	-71	68,000 0	23	079	13	580 0	12	4 0
-46	LT10K262	LT4K313	-72	82,000 0	21	079	12	618 0	11	3 5
-47	LT10K263	LT4K314	-73	100,000 0	18	079	11	678 0	11	3 0

1/ The dash number added to the MS military standard number constitutes the MS part number, for example, MS75089-1

2/ The coils specified herein are substitutes for the inactivated coils on MS90537 providing the small increase in physical dimensions are not a factor The decrease in maximum operating temperature from 125°C to 105°C does not downgrade these coils but assures satisfactory operation at 105°C for a minimum of 2,000 hours of life, rather than a shorter period of operation at 125°C.

APPROVED 18 February 1971 REVISED (B) FOR CHANGES SEE PAGES 1 AND 3

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A. ER Other Cust EC 85	International interest	TITLE COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED (FERRITE CORE-FERRITE SLEEVE) TYPES, LT10K217 TO LT10K263 INCL	MILITARY STANDARD MS 75089	
Procurement Specification MIL-C-15305		SUPERSEDES: MS90537 IN PART PART NOS MS90537-27 THROUGH MS90537-73	SHEET 2 OF 3	

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:28Z
Check the source to verify that this is the current version before use.

User activities: Army ME, AR
Navy AS, MC, SH
Air Force 19

Reviewer activities: Army MI
Navy OS
Air Force 11, 17
DLA-ES

Electrical Characteristics (Final)				
Inspection Group	Allowable variation from initial measurement		Allowable % from specified minimum value in Electrical Characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification Inspection				
Group II	±5	—	—	-10
Group III	±10	±(5%+.001ohm)	-15	-20
Group IV	±5	±(2%+.001ohm)	-5	-20
Quality Conformance Inspection				
Group C Subgroup I	±5	—	—	-10
Subgroup II	±5	±(2%+ 001ohm)	-5	-20
Subgroup III	±10	±(5%+ 001ohm)	-15	-20

NOTES
1. Barometric pressure test (test condition C) is applicable.
2. Shock, specified pulse, method 213, test condition I, is applicable
3. These coils are intended to be supported by their leads.
4. After the overload test is performed, a period of 24 hours shall elapse prior to taking electrical characteristics (final) measurements.
5. DC resistance shall be the last measurement taken in the electrical characteristics test sequence.
6. Solderable/weldable lead wire AWG number 22
7. Dimensions are in inches
8. Metric equivalents are given for general information only.
(B) 9. Metric equivalents are in parentheses
(B) 10. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence
(B) 11. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein

APPROVED 18 February 1971 REVISED (B) FOR CHANGES SEE PAGES 1 AND 3

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A ER Other Cust EC 85	International interest	TITLE, COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED (FERRITE CORE-FERRITE SLEEVE) TYPES, LTIOK217 TO LTIOK263 INCL	MILITARY STANDARD MS 75089	
Procurement Specification MIL-C-15305		SUPERSEDES: MS90537 IN PART PART NOS MS90537-27 THROUGH MS90537-73	SHEET 3 OF 3	

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:28Z
Check the source to verify that this is the current version before use.