NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN
Navy - Weps
USAF

DEPARTMENT SPECIFICATION
NONE

MILITARY STANDARD

REID-REAMING, INTERNAL, 8 SPEC.

MS9014(ASG)


SHEET 1 OF 2


THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE


MS9014(ASG)

INACTIVE FOR DESIGN AFTER 13 JUNE 1960.
NO SUPERSEDING MS STANDARD

For definition and application of drawing status notes, see AMA Bulletin No. 337

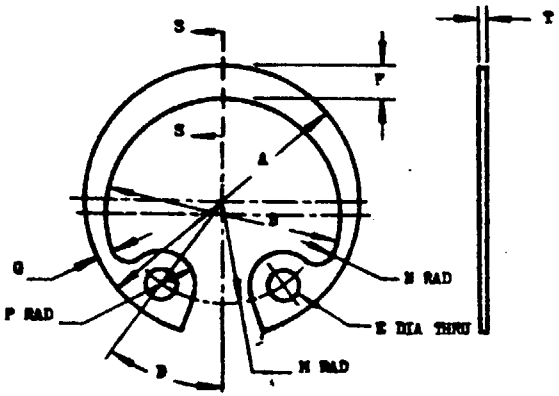

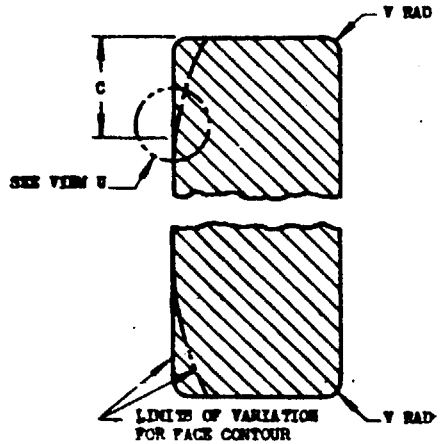

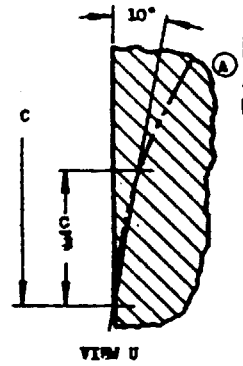

ENLARGED VIEW OF SECTION S-S

PART NO.		FREE DIAMETER A MAX.	FREE DIAMETER A MIN.	FREE DIAMETER B MAX.	C MAX.	D MAX.	D MIN.	E +.010 -.002	F MAX.	F MIN.	Q MAX.	Q MIN.	M ±.016	W ±.016	P	V MAX.	THICKNESS T MAX.	THICKNESS T MIN.	APPROX. WEIGHT LBS/1000
MS9014-03		.276	.269	.240	.009	47°	34°	.031	.027	.023	.017	.013	.104	.0155	.0325	.005	.0163	.0137	.08
MS9014-04		.341	.334	.295	.009	39°	29°	.031	.035	.031	.020	.016	.135	.031	.033	.005	.0163	.0137	.11
MS9014-05		.408	.401	.345	.011	38°	31°	.041	.043	.037	.0312	.0252	.161	.046	.041	.005	.0265	.0235	.25
MS9014-06		.473	.466	.403	.012	38°	31°	.047	.052	.046	.032	.026	.185	.046	.049	.005	.0265	.0235	.37
MS9014-05		.489	.482	.417	.0.2	37°	30°	.047	.053	.047	.033	.027	.193	.047	.049	.005	.0265	.0235	.43
MS9014-06		.543	.528	.463	.012	42°	29°	.047	.057	.049	.039	.031	.210	.062	.057	.008	.037	.033	.70
MS9014-07		.554	.539	.470	.012	41°	29°	.047	.0585	.0505	.039	.031	.215	.062	.057	.008	.037	.033	.77
MS9014-08		.613	.598	.533	.015	41°	29°	.047	.057	.049	.0398	.0318	.236	.0625	.066	.008	.037	.033	.86
MS9014-09		.685	.670	.599	.017	39°	28°	.062	.064	.056	.039	.031	.272	.062	.066	.008	.037	.033	1.00
MS9014-10		.752	.737	.662	.0185	36°	27°	.062	.067	.059	.041	.033	.305	.093	.066	.008	.037	.033	1.20
MS9014-11		.818	.803	.718	.020	35°	27°	.062	.074	.066	.0445	.0365	.333	.093	.071	.008	.037	.033	1.30
MS9014-12		.846	.831	.740	.021	35°	27°	.062	.079	.069	.049	.039	.345	.093	.073	.010	.044	.040	1.70
MS9014-13		.887	.872	.777	.022	35°	27°	.062	.082	.072	.049	.039	.361	.093	.078	.010	.044	.040	1.90
MS9014-14		.944	.929	.828	.023	34°	26°	.062	.086	.076	.0490	.040	.390	.093	.078	.010	.044	.040	2.00
MS9014-15		.954	.939	.834	.0235	44°	26°	.062	.089	.079	.0518	.0418	.395	.093	.078	.010	.044	.040	2.10
MS9014-16		.990	.965	.856	.0245	33°	26°	.062	.092	.082	.052	.042	.408	.093	.078	.010	.044	.040	2.20
MS9014-17		1.025	1.010	.895	.0255	32°	26°	.062	.096	.086	.055	.045	.430	.125	.078	.010	.044	.040	2.40
MS9014-18		1.091	1.076	.953	.0275	31°	25°	.062	.101	.091	.0582	.0482	.463	.125	.078	.010	.044	.040	2.70
MS9014-19		1.116	1.101	.976	.028	31°	25°	.062	.103	.093	.0582	.0482	.476	.125	.078	.010	.044	.040	2.80
MS9014-20		1.165	1.140	1.021	.0285	34°	24°	.078	.107	.095	.0619	.0499	.485	.125	.090	.010	.052	.048	3.70
MS9014-21		1.232	1.207	1.082	.030	32°	24°	.078	.111	.099	.062	.050	.519	.125	.090	.012	.052	.048	4.00
MS9014-22		1.298	1.273	1.138	.0315	32°	24°	.078	.118	.106	.0659	.0539	.552	.125	.090	.012	.052	.048	4.30
MS9014-23		1.366	1.341	1.204	.035	31°	23°	.078	.120	.108	.0644	.0524	.586	.125	.090	.012	.052	.048	4.50
MS9014-24		1.433	1.408	1.263	.0365	30°	23°	.078	.126	.114	.0685	.0565	.619	.156	.090	.012	.052	.048	4.60
MS9014-25		1.501	1.476	1.325	.0375	29°	22°	.078	.130	.118	.0699	.0579	.653	.156	.090	.012	.052	.048	5.30

APPROVED 1 Jul 54 REVISED (A) 13 Jun 60

FED. SUP. CLASS 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DEPARTMENT OF THE NAVY — NAVY PROCUREMENT SPECIFICATION

MILITARY STANDARD

MS9014(ASG)

MS9014(ASG)

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE UNITED KINGDOM AND PRODUCED WITH MILITARY PARTS CONSENT OF THE NAVY

PART NO.		FREE DIAMETER A MAX.	FREE DIAMETER A MIN.	FREE DIAMETER B MAX.	C MAX.	ANGLE D MAX.	ANGLE D MIN.	E +.010 -.002	F MAX.	F MIN.	G MAX.	G MIN.	K ±.016	M ±.016	P	V MAX.	THICKNESS T MAX.	THICKNESS T MIN.	APPROX. WEIGHT LBS/1000
MS9014-26		1.567	1.542	1.387	.039	29°	22°	.078	.132	.120	.0711	.0591	.686	.156	.090	.012	.052	.048	5.70
MS9014-27		1.587	1.562	1.405	.0395	29°	22°	.078	.134	.122	.0713	.0593	.696	.156	.090	.012	.052	.048	5.90
MS9014-28		1.637	1.612	1.452	.040	29°	22°	.078	.136	.124	.0719	.0599	.721	.156	.090	.012	.052	.048	6.60
MS9014-29		1.706	1.675	1.512	.0425	30°	22°	.078	.145	.139	.0773	.0633	.743	.156	.101	.012	.065	.059	8.80
MS9014-30		1.776	1.743	1.568	.045	31°	23°	.078	.153	.139	.084	.070	.765	.187	.113	.012	.065	.059	9.70
MS9014-31		1.806	1.773	1.604	.046	31°	23°	.078	.151	.137	.079	.065	.779	.187	.113	.012	.065	.059	9.80
MS9014-32		1.843	1.810	1.640	.0465	31°	23°	.078	.152	.138	.078	.065	.798	.187	.113	.012	.065	.059	10.00
MS9014-33		1.911	1.878	1.707	.0475	30°	23°	.078	.151	.137	.0809	.0669	.829	.187	.117	.012	.065	.059	10.10
MS9014-34		1.978	1.945	1.770	.049	29°	22°	.093	.154	.140	.080	.066	.862	.187	.117	.012	.065	.059	10.50
MS9014-35		2.018	1.985	1.807	.0495	29°	22°	.093	.156	.142	.082	.068	.882	.187	.117	.012	.065	.059	10.80
MS9014-36		2.045	2.012	1.833	.050	29°	22°	.093	.157	.143	.0822	.0682	.896	.187	.117	.012	.065	.059	11.10
MS9014-37		2.115	2.082	1.895	.0515	29°	22°	.093	.162	.148	.083	.069	.931	.187	.117	.012	.065	.059	11.40
MS9014-38		2.180	2.147	1.956	.055	29°	22°	.093	.172	.158	.089	.0875	.960	.187	.120	.012	.065	.059	13.20
MS9014-39		2.250	2.210	2.008	.0565	30°	22°	.093	.178	.164	.0919	.0779	.988	.187	.125	.015	.081	.075	17.00
MS9014-40		2.320	2.280	2.076	.057	29°	22°	.093	.180	.166	.092	.078	1.018	.187	.130	.015	.081	.075	18.00
MS9014-41		2.390	2.350	2.136	.059	29°	22°	.093	.186	.172	.096	.082	1.051	.250	.132	.015	.081	.075	20.00
MS9014-42		2.460	2.420	2.205	.060	29°	22°	.093	.187	.173	.097	.083	1.083	.250	.135	.015	.081	.075	20.50
MS9014-43		2.525	2.485	2.253	.0635	28°	22°	.093	.199	.185	.102	.088	1.115	.250	.135	.015	.081	.075	21.50
MS9014-44		2.592	2.552	2.316	.065	28°	22°	.093	.202	.188	.103	.089	1.149	.250	.135	.015	.081	.075	22.00
MS9014-45		2.659	2.619	2.375	.066	28°	22°	.110	.208	.194	.105	.091	1.177	.250	.140	.015	.081	.075	24.00
MS9014-46		2.725	2.685	2.437	.0675	28°	22°	.110	.211	.197	.113	.099	1.210	.500	.140	.015	.081	.075	26.00
MS9014-47		2.758	2.718	2.468	.0685	28°	22°	.110	.212	.198	.108	.094	1.227	.312	.140	.015	.081	.075	26.00
MS9014-48		2.890	2.740	2.496	.0685	28°	21°	.110	.214	.200	.111	.097	1.235	.312	.145	.015	.096	.090	30.00
MS9014-49		2.870	2.820	2.572	.070	28°	21°	.110	.217	.203	.112	.098	1.275	.312	.150	.015	.096	.090	33.50
MS9014-50		2.937	2.887	2.629	.072	28°	21°	.110	.225	.211	.113	.099	1.304	.250	.150	.015	.096	.090	34.50
MS9014-51		3.005	2.955	2.687	.075	28°	21°	.110	.232	.218	.115	.101	1.338	.250	.150	.015	.096	.090	35.00
MS9014-52		3.070	3.020	2.750	.076	28°	21°	.110	.273	.259	.138	.124	1.370	.250	.150	.015	.096	.090	43.00
MS9014-53		3.093	3.043	2.767	.0765	28°	21°	.110	.237	.223	.118	.104	1.382	.250	.150	.015	.096	.090	38.00
MS9014-54		3.135	3.085	2.803	.0775	28°	21°	.110	.241	.227	.121	.110	1.398	.375	.150	.015	.096	.090	41.00
MS9014-55		3.275	3.225	2.922	.0825	28°	21°	.110	.256	.242	.128	.114	1.468	.250	.150	.015	.096	.090	45.00

MATERIAL: STEEL AMS5120

HARDNESS: ROCKWELL (15N - 86-88 for Rings MS9014-1 and MS9014-2 Only
(30N - 66-73 for Rings MS9014-3 to MS9014-19 inclusive
(C 47-52 for Rings MS9014-20 to MS9014-55

FINISH: AMS2400

BREAK SHARP EDGES: .010 MAX.

WITH ALLOWANCE FOR INITIAL SET, RINGS SHALL NOT TAKE A PERMANENT SET OR FAIL BY CRACKING WHEN CONTRACTED SO THAT LUGS ARE IN CONTACT

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: ANGULAR DIMENSIONS ± 2°

DO NOT USE UNASSIGNED PART NUMBERS
HOLES MUST NOT BREAK THRU LUG CONTOUR

(A) INACTIVE FOR DESIGN AFTER 13 JUNE 1960.
NO SUPERSEDING MS STANDARD
For definition and application of drawing status notes, see ANA Bulletin No. 337

APPROVED 1 Jul 51 REVISED (A) FOR CHANGES SEE SHEET NO. 1 AND 2

FED. SUP CLASS 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.