INCH-POUND


MIL-C-24758/1 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758(SH).

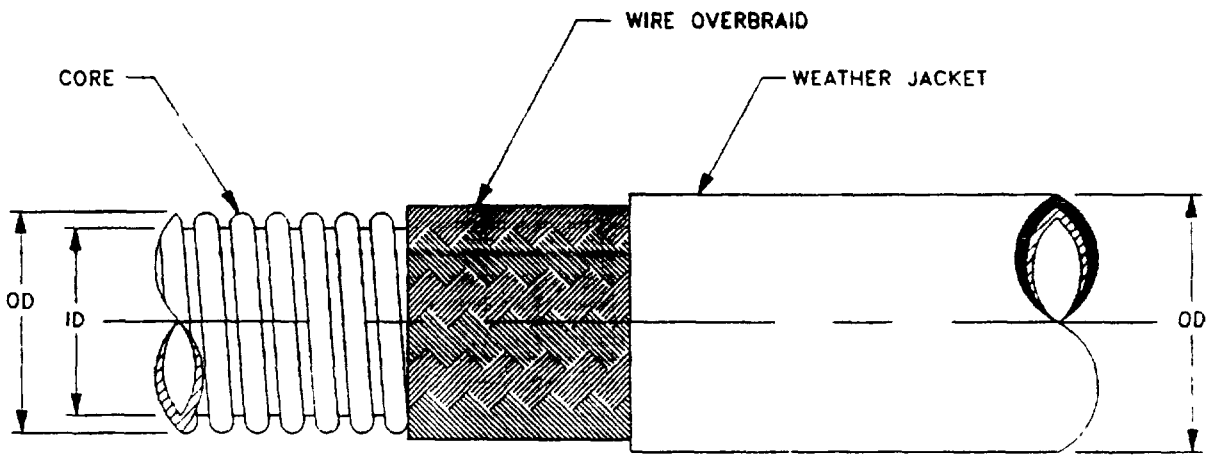

NOTES:
1. Dimensions are in inches.

FIGURE 1. Conduit configuration.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:46Z
Check the source to verify that this is the current version before use.

TABLE I. Conduit dimensions.

CONDUIT NOMINAL ID	SIZE CODE	ID (MIN)	OD (over core)	OD (over jacket)	Minimum Bend Radius (Inside)
0.25	02	0.245	0.364 ±0.01	0.58 ± 0.04	1.25
0.375	03	0.370	0.488 ±0.01	0.70 ± 0.04	2.0
0.50	04	0.495	0.637 ±0.01	0.85 ± 0.04	2.50
0.625	05	0.620	0.760 ±0.01	0.98 ± 0.04	3.0
0.75	06	0.745	0.880 ±0.01	1.10 ± 0.04	3.75
1.0	08	0.995	1.192 ±0.01	1.41 ± 0.04	5.0
1.25	10	1.245	1.454 ±0.01	1.66 ± 0.04	6.25
1.50	12	1.495	1.704 ±0.01	1.91 ± 0.04	7.50
2.0	16	1.995	2.214 ±0.01	2.44 ± 0.045	10.0
2.50	20	2.495	2.714 ±0.01	2.94 ± 0.045	12.50
3.0	24	2.995	3.204 ±0.01	3.44 ± 0.045	15.0

NOTES:
1. Dimensions are in inches.
2. Dimensions and configuration: See figure 1 and table I.

Part or Identifying Number (PIN) Example:

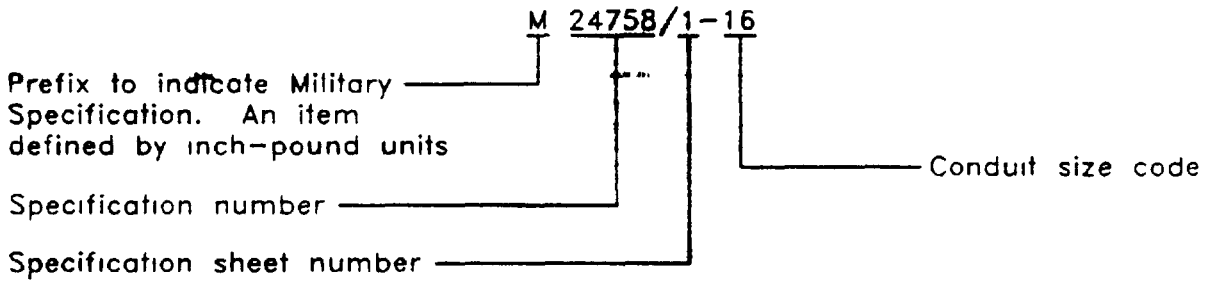

Preparing Activity:
Navy - SH
(Project 5975-N651-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:46Z
Check the source to verify that this is the current version before use.