INCH-POUND


MIL-C-24758/2 (SH)
5 August 1991

MILITARY SPECIFICATION

CONDUIT, FLEXIBLE, WEATHERPROOF, STRAIGHT CONDUIT FITTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

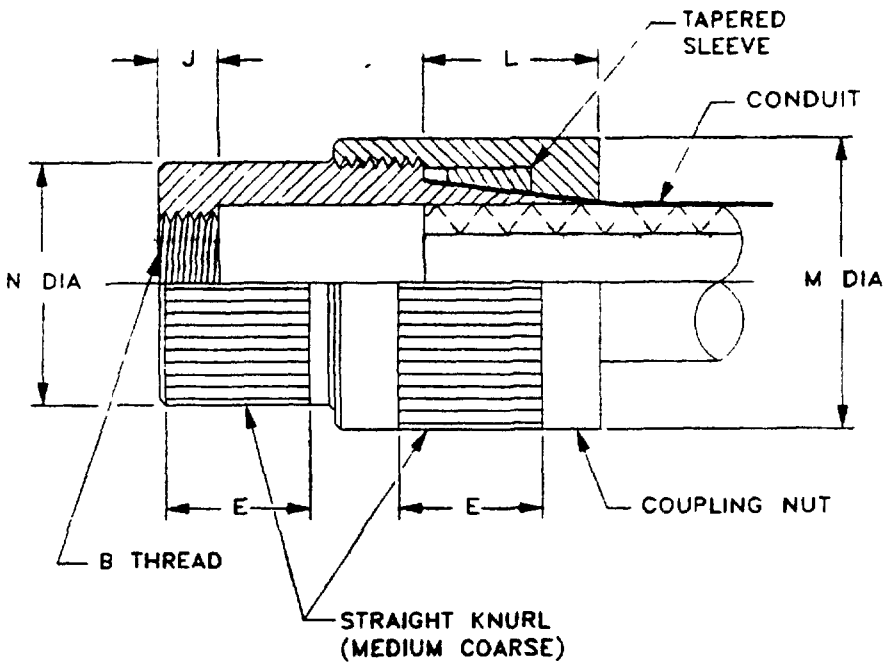

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:46Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

CONDUIT SIZE CODE	FITTING DIMENSIONS					
	B THREAD (Class 2B)	J THREAD LENGTH +.06,-0	L CONE LENGTH ±.06	E KNURL LENGTH ±.06	M DIA (Max)	N DIA (Max)
02	0.4375 - 28 UNEF	0.21	0.75	0.50	0.93	0.70
03	0.5625 - 24 UNEF	0.25	0.75	0.50	1.12	0.82
04	0.6875 - 24 UNEF	0.25	0.75	0.62	1.25	0.97
05	0.8125 - 20 UNEF	0.31	0.75	0.62	1.43	1.12
06	0.9375 - 20 UNEF	0.31	0.75	0.75	1.62	1.22
08	1.250 - 18 UNEF	0.37	1.00	0.75	1.81	1.53
10	1.5625 - 18 UNEF	0.37	1.00	0.87	2.18	1.81
12	1.875 - 16 UN	0.43	1.00	0.87	2.56	2.12
16	2.375 - 16 UN	0.43	1.00	1.00	3.06	2.62
20	2.875 - 16 UN	0.43	1.00	1.00	3.86	3.12
24	3.375 - 16 UN	0.43	1.00	1.00	4.38	3.62

NOTES:
1. The function of the M24758/2 fitting is to terminate flexible shielding conduit and provide a standard thread for attaching all M24758/9 through M24758/19 fittings.
2. Dimensions are in inches.
3. Dimensions and configurations: See figure 1 and table I.
4. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identifying Number (PIN) Example:

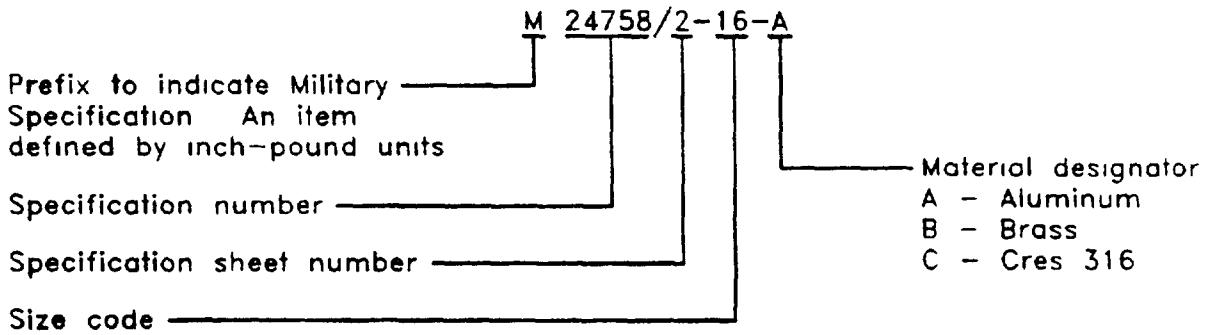

Preparing Activity:
Navy - SH
(Project 5975-N651-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:46Z
Check the source to verify that this is the current version before use.