MILITARY SPECIFICATION

CAMOUFLAGE SCREENING SYSTEMS, MODULAR,

LIGHTWEIGHT, SYNTHETIC-SNOW

This amendment forms a part of Military Specification MIL-C-52933(ME), dated 21 September 1977.

PAGE 2

2.1, STANDARDS

Under MILITARY
Add "MS51929 - Buckle, Spring Action."

PAGE 5

3.4.5, Delete and substitute:

"3.4.5. Base cloth. The base cloth shall be a woven construction."

PAGE 9

TABLE I: Delete the asterisk after "0.85 or above" and "*Value shall not be less than 0.75 at 350, 355, and 360." at the bottom of the table.

3.6.4.1, line 3: Delete "20 percent" and substitute "25 percent".

PAGE 11

3.6.4.6, delete and substitute:

"3.6.4.6. Flame resistance. Flame resistance test specimens shall be self-extinguishing prior to burning of 60% of the specimen area when tested as specified in 4.6.2.2.6. Test specimens shall be fabricated from 12 in. x 12 in. incised (per figure 4) color coated cloth, attached to 12 in. x 12 in.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.

PAGE 11 (Continued)

net samples, with hog ring spacing per 3.6.5. Two specimens shall be fabricated from each sampling for finished cloth (see 4.5.1.2.2) for each color represented; specimens shall not be selected from the same roll."

3.6.4.7, line 7: delete "2.25 NBS" and substitute "2.50 NBS."

Table II, delete and substitute:

"TABLE II. Color reflectance in the ultraviolet and infrared spectral regions.

Color	Infrared reflectance 1/ Range 2/		Ultraviolet reflectance 1/ Range 2/
	Percent		
Snow	(max)	(min)	(min)
1. Forest green	35.0	25.0	
2. Tan	55.0	35.0	
3. White	--	85.0*	75.0**

* After environmental exposure, the infrared reflectance shall be 80.0 (min).
** After environmental exposure, the ultraviolet reflectance shall be 73.0 (min).

1/ IR reflectance range to Ba SO_4 or freshly smoked MgO.
2/ See Table V for wavelength definition."

PAGE 12

3.7.1, add at the end of paragraph: "Color pigment shall be titanium dioxide and the pigment shall be not less than 0.75 percent nor more than one percent."

3.7.3, delete and substitute:

"3.7.3 Color. Color for snow lanyards shall conform to Fed. Std. No. 595, Color No. 37875."

PAGE 13

3.9, repair kit item list: Delete "Repair instruction sheet", "1" and "3.10".

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.

PAGE 24

4.6.2.2.6, delete and substitute:

"4.6.2.2.6 Flame resistance. Samples selected in accordance with 3.6.4.6 shall be tested as specified herein. Each sample shall be hung from a horizontal support in such a manner that the entire 12 x 12 inch area is exposed. The middle of the bottom edge of the sample shall be positioned in the center of a 1-1/2 inch bunsen burner flame. The burner and fuel shall be as specified in FED. Test Method Std. No. 191, Method 5903. The test shall be performed in a hooded area as specified in Method 5903. The flame shall be applied as specified in Method 5903 for 15 seconds, then removed. Nonconformance to 3.6.4.6 by more than three of the specimens or by two specimens of the same color shall constitute failure of this test."

PAGE 26

TABLE V, delete and substitute:

"TABLE V. Selected ordinates for determining infrared values and ultraviolet values from spectrophotometric curves.

Ordinates infrared region (Nanometers)		Ordinates ultraviolet region (Nanometers)
714.0	793.0	350.0
725.0	797.0	355.0
730.0	802.0	360.0
737.0	807.0	
742.0	811.0	
747.0	816.0	
751.0	821.0	
756.0	826.0	
760.0	831.0	
764.0	836.0	
769.0	842.0	
773.0	848.0	
777.0	855.0	
783.0	862.0	
787.0	873.0"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:40Z
Check the source to verify that this is the current version before use.

FIGURE 9

Delete and substitute revised Figure 9.

FIGURE 13

Delete and substitute revised Figure 13.

FIGURE 14

Delete and substitute revised Figure 14.

FIGURE 15


Delete and substitute revised Figure 15.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 1080-A058

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.

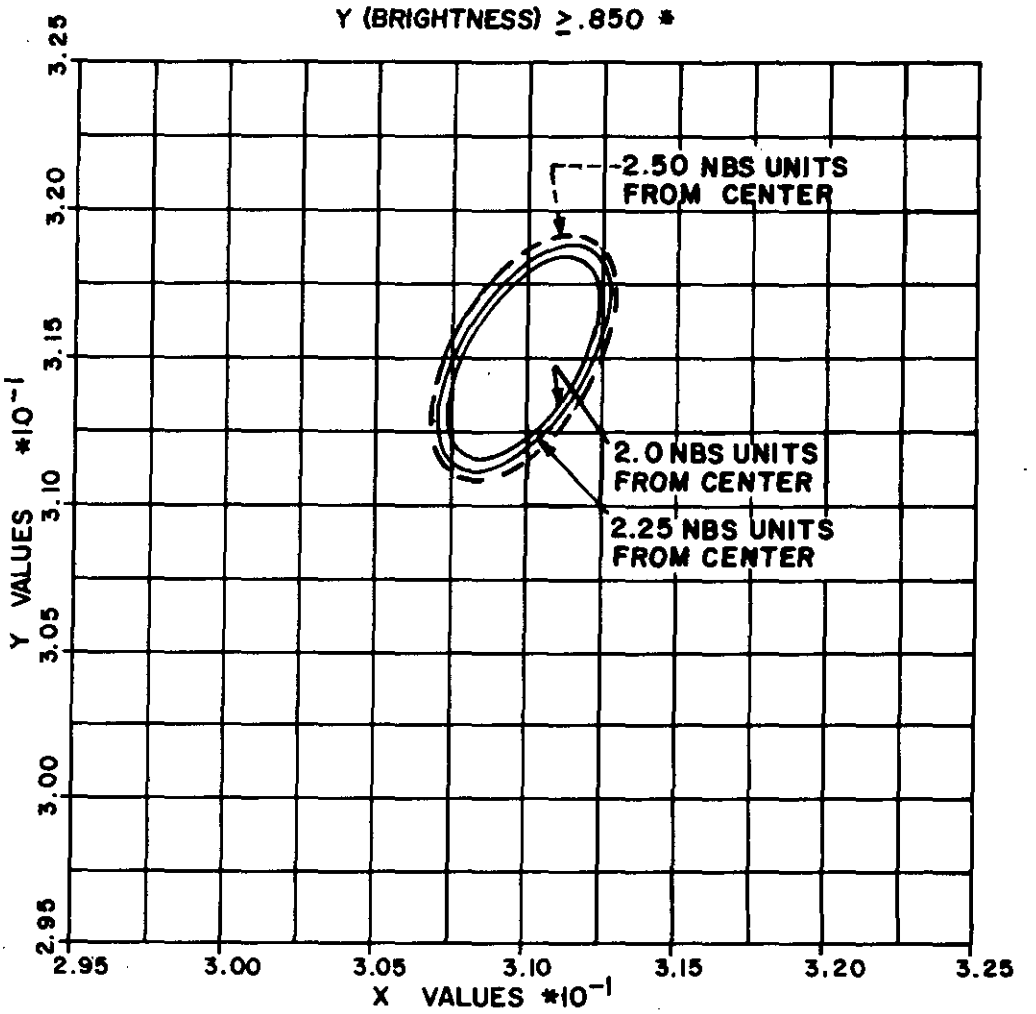


NOTE:
COLOR ELLIPSES ARE 2.0 AND 2.25 NBS UNITS FROM CENTER VALUES. AFTER ENVIRONMENTAL EXPOSURE THE ELLIPSE OF 2.50 NBS UNITS FROM CENTER VALUES WILL BE APPLICABLE.

* AFTER ENVIRONMENTAL EXPOSURE THE Y (BRIGHTNESS) WILL BE ≥ .830.

FIGURE 9. Chromaticity diagram for camouflage cloth color-white (snow).

X-3953B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.

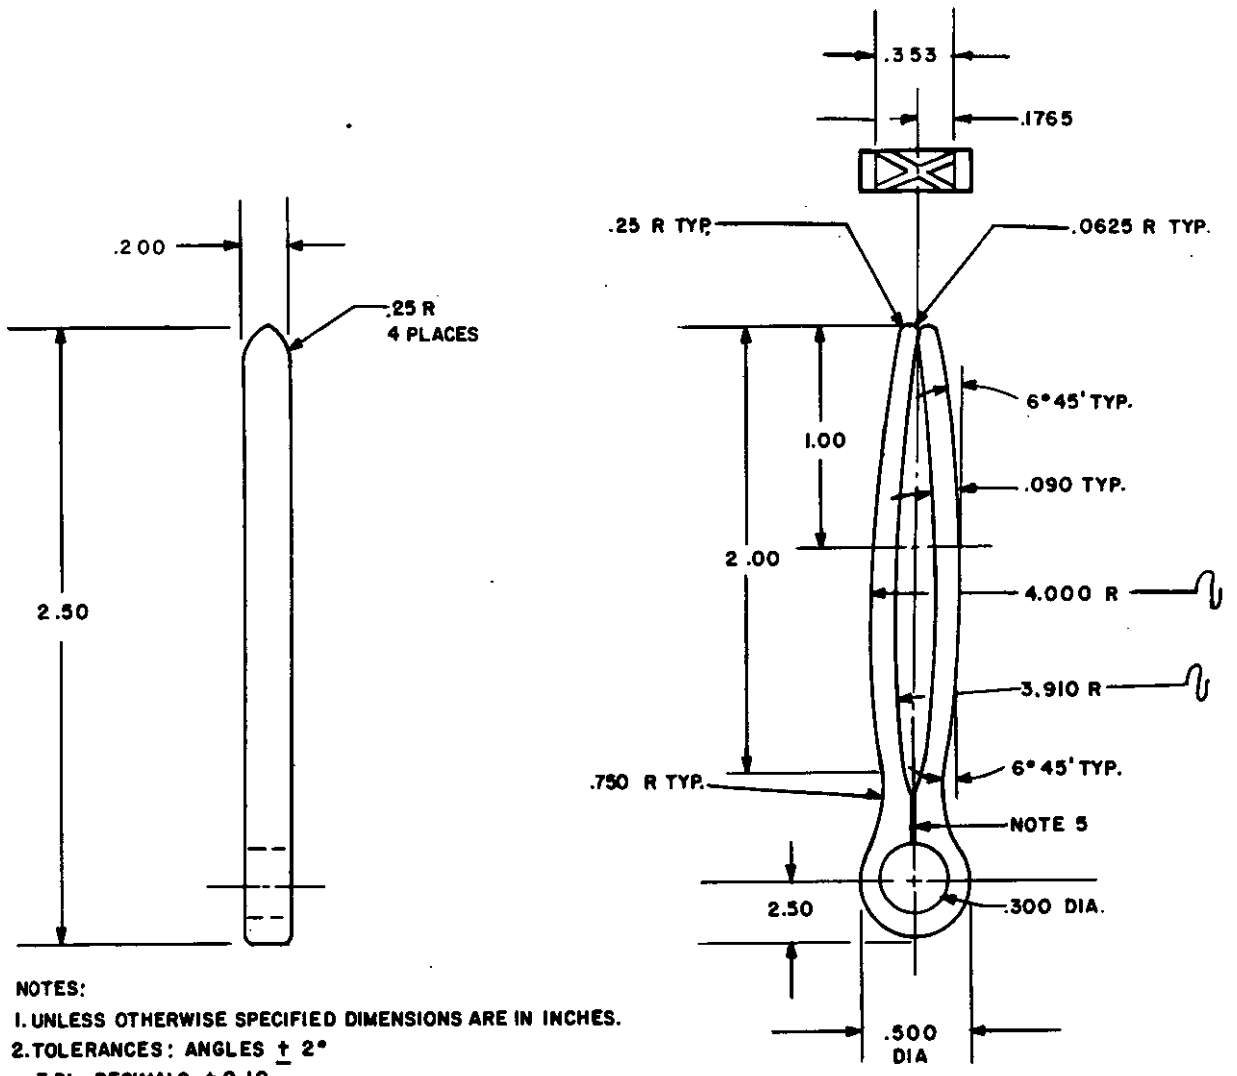


NOTES:


1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. TOLERANCES: ANGLES ± 2°
   3 PL. DECIMALS ± 0.10
   2 PL. DECIMALS ± .02
3. BREAK SHARP EDGES
4. OUTSIDE EDGES (4) OF PIN PRONGS TO BE RADIUSED .031 INCH.
5. SLIT, DO NOT REMOVE MAT'L (MAY BE MOLDED).

FIGURE 13. Pin

X-3955A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:40Z
Check the source to verify that this is the current version before use.

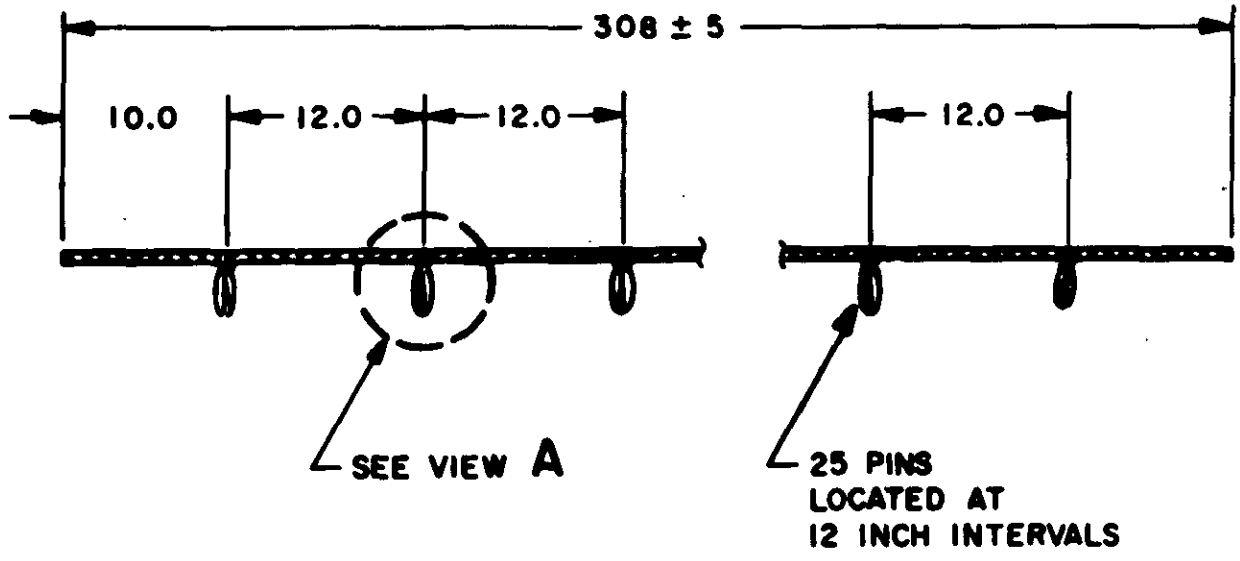

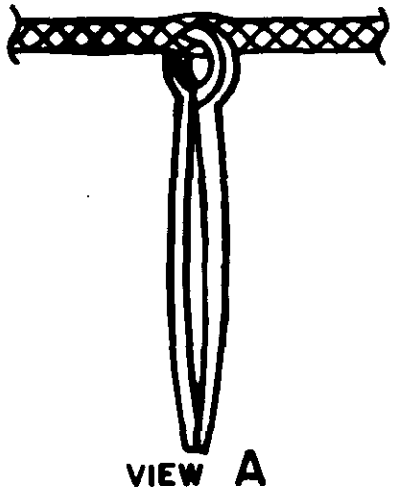


NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. UNSPECIFIED TOLERANCE: ±.5

FIGURE 14. Lanyard with pin location.

X-3956A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.

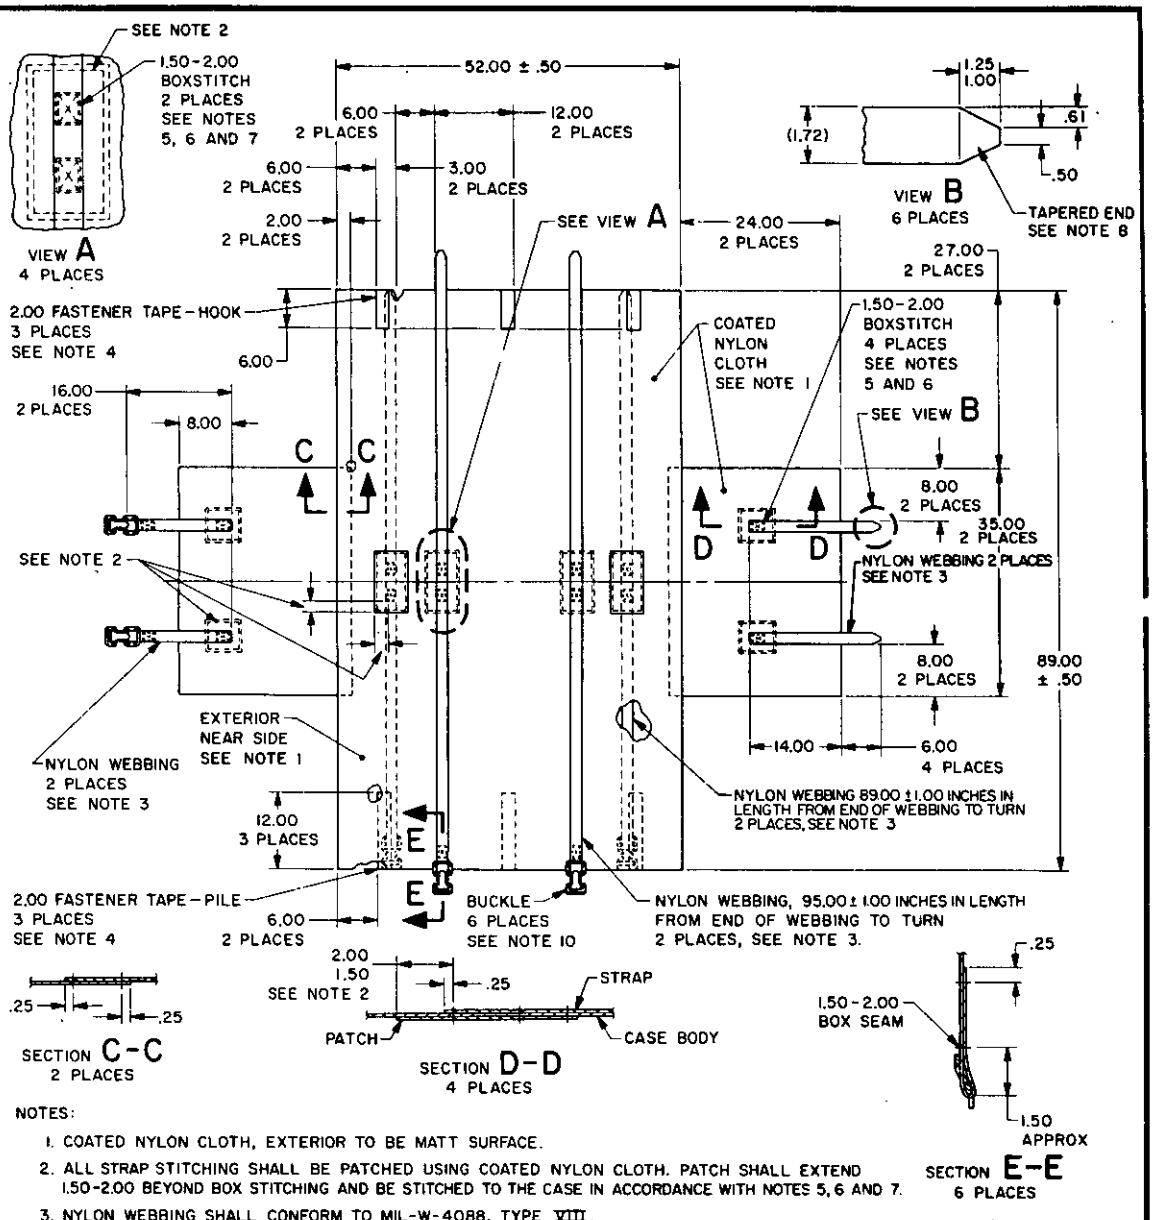

NOTES:

1. COATED NYLON CLOTH, EXTERIOR TO BE MATT SURFACE.
2. ALL STRAP STITCHING SHALL BE PATCHED USING COATED NYLON CLOTH. PATCH SHALL EXTEND 1.50-2.00 BEYOND BOX STITCHING AND BE STITCHED TO THE CASE IN ACCORDANCE WITH NOTES 5, 6 AND 7.
3. NYLON WEBBING SHALL CONFORM TO MIL-W-4088, TYPE VIII.
4. FASTENER TAPE (HOOK AND PILE) SHALL CONFORM TO MIL-F-21840, TYPE II, 2.00 WIDE.
5. POLYESTER THREAD SHALL CONFORM TO V-T-285, TYPE I, CLASS 1, SIZE FF, OR TYPE II, CLASS I, SIZE FF, NONWICKING.
6. STITCHES AND STITCHING SHALL CONFORM TO FED-STD-751, TYPE 301, 6-8 STITCHES PER INCH.
7. ALL STITCH MARGINS .12 ± .06 INCH UNLESS OTHERWISE SPECIFIED.
8. ALL NYLON WEB EDGES TO BE HEAT SEALED AND TAPERED ENDS HARDENED USING CLEAR DRYING RESIN.
9. BOX STITCHING MAY BE 1.75 X 1.75-2.00
10. BUCKLE, 1 3/4 SIZE, MS51929 OR EQUAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
TOLERANCES:
.25 TO 2.00 ± .12
2.00 TO 10.00 ± .25
OVER 10.00 ± .38

FIGURE 15. Screen case

X-3957A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:40Z
Check the source to verify that this is the current version before use.